


160 School House Road, Souderton, PA 18964-9990 USA Phone 215-723-8181•FAX 215-723-5688 MODEL 25S1G4 M1, M2, M3, M4 25 WATTS CW 0.8 – 4.2 GHz

The Model 25S1G4 is a solid state, self-contained, air-cooled, broadband amplifier designed for applications where instantaneous bandwidth, high gain and linearity are required. Housed in a stylish contemporary cabinet, the unit is designed for benchtop use, but can be removed from the cabinet for immediate equipment rack mounting.

The 25S1G4, when used with a sweep generator, will provide a minimum of 25 watts of RF power. Included is a front panel gain control which permits the operator to conveniently set the desired output level. The 25S1G4 is protected from RF input overdrive by an RF input leveling circuit which controls the RF input level to the RF amplifier first stage when the RF input level is increased above 0 dBm. The RF amplifier stages are protected from over-temperature by removing the DC voltage to them if an over-temperature condition occurs due to cooling blockage or fan failure. There is a digital display on the front panel to indicate the operate status and fault conditions if an over-temperature or power supply fault has occurred. The unit can be returned to operate when the condition has been cleared. The 25S1G4 digital panel provides control of all amplifier functions both locally and remotely via IEEE-488 (GPIB) or RS-232 interfaces.

The low level of spurious signals and linearity of the Model 25S1G4 make it ideal for use as a driver amplifier in testing wireless and communication components and subsystems. It can be used as a test instrument covering multiple frequency bands and is suitable for a variety of communication technologies such as CDMA, W-CDMA, TDMA, GSM etc. It is also suitable for EMC Test applications where undistorted modulation envelopes are desired.

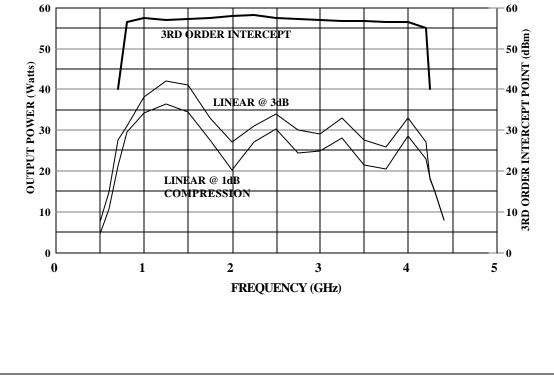

## 25S1G4 Typical Performance

REV082202

## SPECIFICATIONS Model 25S1G4

RATED POWER OUTPUT ........ 25 WATTS MINIMUM

MISMATCH TOLERANCE

INPUT FOR RATED OUTPUT 1.0 MILLIWATT MAXIMUM	100% of rated power without foldback. Will operate without damage or oscillation with any magnitude and phase of source and load impedance. (See Application Note #27)		
POWER OUTPUT @ 3dB COMPRESSSIONNominal	MODULATION CAPABILITY Will faithfully reproduce AM, FM, or pulse Modulation appearing on the input signal		
POWER OUTPUT @ 1dB COMPRESSION         Nominal       27 watts         Minimum       20 watts         FLATNESS       ±1.5 dB typical	THIRD ORDER INTERCEPT See chart. The third order intercept points for this chart have been determined using two tones spaced 1 MHz apart. This is typical for W-CDMA systems. Closer tone spacing such as 60 kHz generally provides about a 1db to 3db improvement in the IP.		
FREQUENCY RESPONSE 0.8 – 4.2 GHz instantaneously	HARMONIC DISTORTION		
GAIN (at maximum setting) 44 dB minimum	SPURIOUSMinus 73 dbc Typ. PHASE LINEARITY ±1.0 deg/100 MHz, Typ		
GAIN ADJUSTMENT(Continuous Range) 10 dB minimum 	PRIMARY POWER(Selected Automatically) 		
INPUT IMPEDANCE	CONNECTORS RF Type N female REMOTE INTERFACES IEEE-488		
OUTPUT IMPEDANCE 50 ohms, nominal	RS-2329 pin Subminiature D (female) SAFETY INTERLOCK15 pin Subminiature D		

## MODEL CONFIGURATIONS

**COOLING** ...... Forced air (self contained fans)

MODEL NUMBER	RF INPUT	RF OUTPUT	WEIGHT	SIZE (W x H x D)
25S1G4	Type N female on front panel	Type N female on front panel	35.0 kg (77.0 lb)	50.3 x 20.3 x 54.6 cm 19.8 x 8.0 x 21.5 in
25S1G4AM1	Type N female on rear panel	Type N female on rear panel	35.0 kg (77.0 lb)	50.3 x 20.3 x 54.6 cm 19.8 x 8.0 x 21.5 in
25S1G4AM2	Same as 25S1G4A with enclosure removed for rack mounting		25.6 kg (57.0 lb)	48.3 x 17.8 x 54.6 cm 19.0 x 7.0 x 21.5 in
25S1G4AM3	Same as 25S1G4AM1 with enclosure removed for rack mounting		25.6 kg (57.0 lb)	48.3 x 17.8 x 54.6 cm 19.0 x 7.0 x 21.5 in
25S1G4AM4	Type N female on front panel	4 SMA females on rear panel	35.0 kg (77.0 lb)	50.3 x 20.3 x 54.6 cm 19.8 x 8.0 x 21.5 in
	Single RF input, Four independent RF outputs with Rated Power out of 6 watts each.			