



## 2000W1000D

- 2000 Watts CW
- 80MHz-1000MHz

### Features

The Model 2000W1000D is a self-contained, air-cooled, broadband, completely solid-state amplifier designed for applications where instantaneous bandwidth and high gain are required. Push-pull circuitry is utilized in all high power stages in the interest of lowering distortion and improving stability. The Model 2000W1000D, when used with an RF sweep generator, will provide a minimum of 2000 watts of RF power.


The Model 2000W1000D is equipped with a Digital Control Panel (DCP) which provides both local and remote control of the amplifier. The DCP uses a color LCD touch screen and a single rotary knob to offer status reporting and control capability. The display provides operational presentation of Forward Power and Reflected Power plus amplifier status. Special features include a gain control, internal automatic level control (ALC) with front panel control of the ALC threshold, forward and reflective RF sample ports for precise power measurements and RF output level protection. Protection is provided by DC current level sensing of all output stages.

All amplifier control functions and status indications are available remotely in GPIB/IEEE-488 format and RS-232 hardware and fiber optic, USB and Ethernet. The buss interface connector is located on the back panel and positive control of local or remote operation is assured by a keylock on the front panel of the amplifier.

Housed in a single equipment rack, the 2000W1000D provides readily available RF power for typical applications such as RF susceptibility testing, antenna and component testing, watt meter calibration, and as a driver for frequency multipliers and higher power amplifiers. A safety interlock can be implemented via a rear panel connector.

The 2000W1000D has the ability to be upgraded at a later date to the 4000W1000B, 4000 watt amplifier.

The export classification for this equipment is EAR99. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

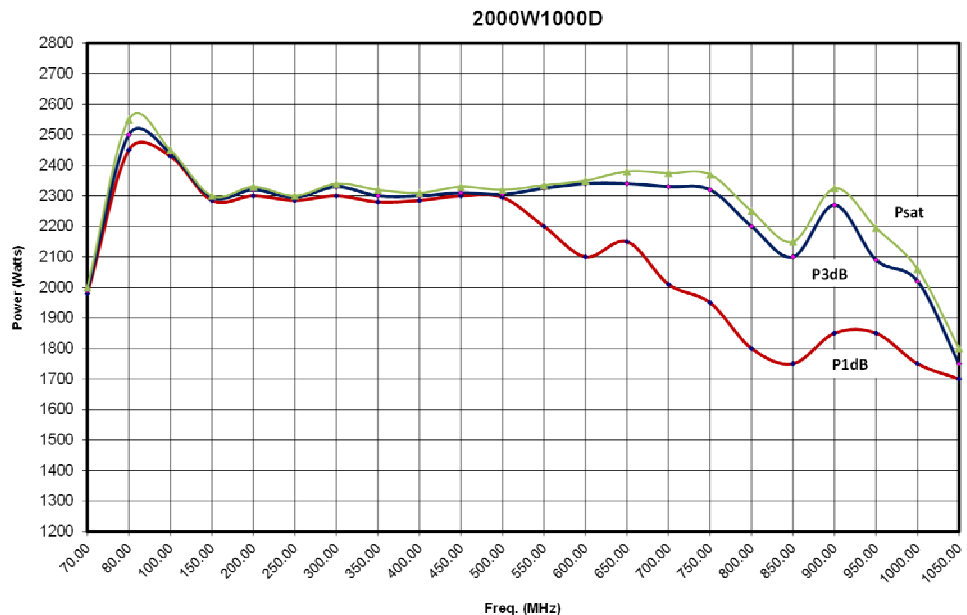

AR RF/Microwave  
Instrumentation  
160 School House Rd  
Souderton, PA 18964  
215-723-8181

For an applications engineer call: 800.933.8181

[www.arworld.us](http://www.arworld.us)



# 2000W1000D

- 2000 Watts CW
- 80MHz-1000MHz

## Specifications

**RATED OUTPUT POWER:** Typical 2200 watts; 2000 watts minimum

**INPUT FOR RATED OUTPUT:** 1.0 milliwatt maximum

**POWER OUTPUT @ 3 dB compression:**  
Nominal 2200 watts, 2000 watts min up to 700 MHz, 1800 watts from 700 to 1000 MHz

**POWER OUTPUT @ 1 dB compression:**  
Nominal 1850 watts, 1750 watts min up to 700 MHz; 1600 watts min from 700 to 1000 MHz

**FLATNESS:**  $\pm 2.0$  dB maximum;  $\pm 1.5$  dB typical

**FREQUENCY RESPONSE:** 80-1000 MHz instantaneously

**GAIN (at maximum setting):** 63 dB minimum

**GAIN ADJUSTMENT (continuous range):** 25 dB minimum

**INPUT IMPEDANCE:** 50 ohms, VSWR 1.5:1 maximum; 1.3:1 typical

**OUTPUT IMPEDANCE:** 50 ohms nominal

**MISMATCH TOLERANCE:** 100% of rated power without foldback. Will operate without damage or oscillation with any magnitude and phase of source and load impedance. (See Application Note #27)

**MODULATION CAPABILITY:** Faithfully reproduces AM, FM, or Pulse modulation appearing on input signal.

**HARMONIC DISTORTION:** Minus 20 dBc maximum at 1800 watts, -20 dBc typical @ 2000 watts

**THIRD ORDER INTERCEPT POINT:** 70 dBm typical

**NOISE FIGURE:** 8 dB maximum, 6 dB typical

**PRIMARY POWER (specify voltage):** 200-240 VAC Delta-connected (4-wire), 380-415 VAC Wye-connected (5-wire); 50/60 Hz, three phase, 9000 watts

**CONNECTORS**

RF Input:	Type N female, rear panel
RF Output:	Type 1-5/8 female, rear panel
Forward sample:	N female, front (-63 dBc)
Reverse sample:	N female, front (-63 dBc)
Remote Interfaces:	
IEEE-488	24-pin female
RS-232	9-pin Subminiature D, female
Fiber Optic	ST Conn Tx and Rx RS-232
USB 2.0	Type B
Ethernet	RJ-45
Safety Interlock:	15-pin Subminiature D, rear panel


**COOLING:** Forced air (self contained fans), enters front and bottom

**WEIGHT (approximate):** 218 kg (480 lb)

**SIZE (W x H x D):** 56.1 x 175.3 x 97.6 cm (22.1 x 69 x 38.4 in)

**EXPORT CLASSIFICATION:** EAR99

## Graphs

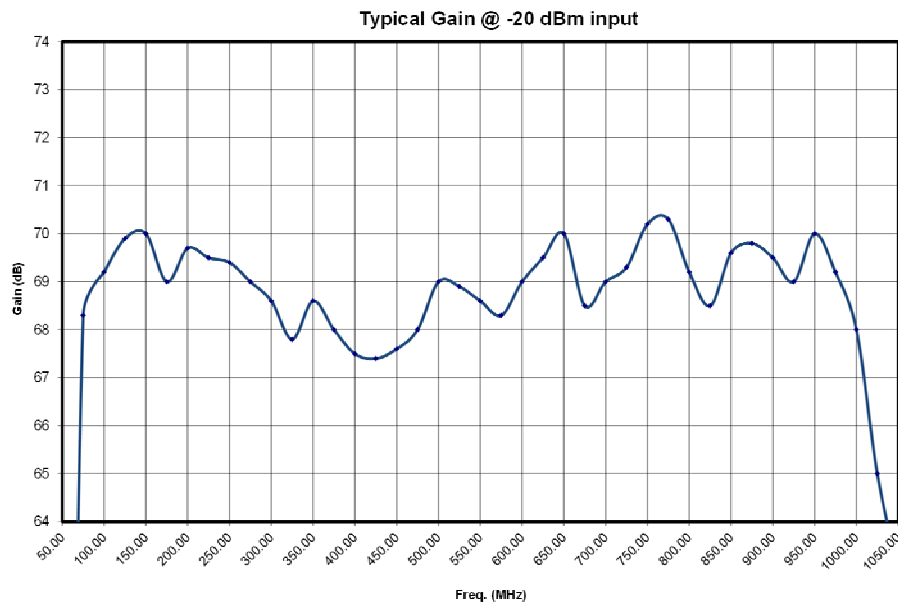

2000W1000D

- 2000 Watts CW
- 80MHz-1000MHz

