


# R&S® SMW200A

## Vector Signal Generator

### Specifications

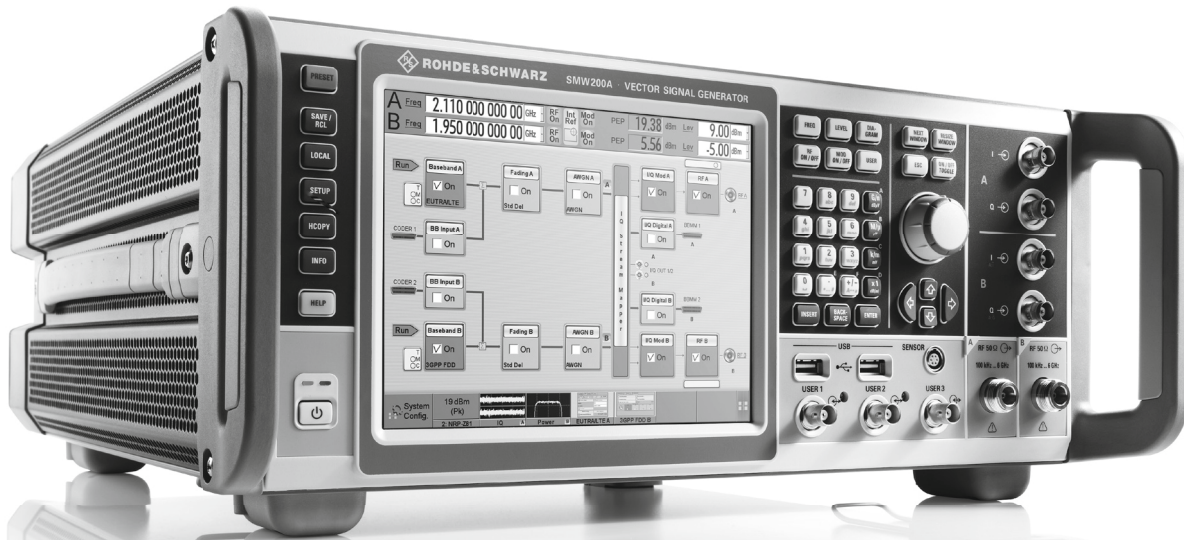

# CONTENTS

<b>Key features</b> .....	<b>4</b>
<b>Definitions</b> .....	<b>5</b>
<b>Frequency and baseband main module options</b> .....	<b>6</b>
Frequency options .....	6
Signal routing and baseband main module options .....	6
<b>RF enhancement options and RF path combinations</b> .....	<b>7</b>
<b>RF characteristics</b> .....	<b>8</b>
Frequency .....	8
Frequency sweep .....	8
Reference frequency .....	8
Level .....	9
Level sweep .....	12
Spectral purity .....	12
Phase coherence (R&S®SMW-B90 option) .....	16
<b>Simultaneous modulation</b> .....	<b>16</b>
<b>Analog modulation</b> .....	<b>17</b>
Amplitude modulation .....	17
Frequency modulation (R&S®SMW-B20 or R&S®SMW-B22 option) .....	17
Phase modulation (R&S®SMW-B20 or R&S®SMW-B22 option) .....	18
Pulse modulation (R&S®SMW-K22 option) .....	19
Input for external modulation signals .....	19
<b>Modulation sources for analog modulation</b> .....	<b>20</b>
Internal modulation generator .....	20
Multifunction generator (R&S®SMW-K24 option) .....	20
LF output .....	20
High-performance pulse generator (R&S®SMW-K23 option) .....	21
I/Q modulation .....	21
<i>I/Q modulation performance</i> .....	21
Analog I/Q inputs .....	23
Internal baseband characteristics (R&S®SMW-B13 or R&S®SMW-B13T option) .....	23
Analog I/Q outputs (R&S®SMW-B13 or R&S®SMW-B13T option) .....	24
Differential analog I/Q outputs (R&S®SMW-K16 option) .....	24
Envelope tracking (R&S®SMW-K540 option) .....	25
AM/AM, AM/φM predistortion (R&S®SMW-K541 option) .....	25
Digital baseband inputs/outputs .....	26
I/Q baseband generator (R&S®SMW-B10 option) – arbitrary waveform mode .....	28
I/Q baseband generator (R&S®SMW-B10 option) – realtime operation (custom digital modulation) .....	30

Modulation performance for digital standards and modulation systems .....	32
3GPP FDD (with R&S®SMW-K42 option) .....	32
IEEE 802.11ac (with R&S®SMW-K86 option) .....	34
Custom digital modulation (with R&S®SMW-B10 option, realtime mode) .....	34
Slow I/Q (R&S®SMW-K551 option).....	36
<b>Digital modulation systems .....</b>	<b>37</b>
Internal digital standards .....	37
Digital standards with R&S®WinIQSIM2™.....	38
Options with external R&S®Pulse Sequencer software or R&S®Pulse Sequencer (DFS) software .....	38
<b>Multichannel, MIMO, fading and noise .....</b>	<b>39</b>
Fading simulator (R&S®SMW-B14 option).....	39
Dynamic fading (R&S®SMW-K71 option).....	40
Enhanced fading models (R&S®SMW-K72 option).....	41
MIMO fading/routing (R&S®SMW-K74 option).....	41
Multiple entities (R&S®SMW-K76 option).....	43
Additive white Gaussian noise (AWGN) (R&S®SMW-K62 option).....	44
<b>Remote control.....</b>	<b>45</b>
<b>Connectors .....</b>	<b>46</b>
Front panel connectors .....	46
Rear panel connectors.....	46
<b>General data .....</b>	<b>48</b>
<b>Ordering information .....</b>	<b>49</b>

# Key features

## For all your needs

- Frequency range from 100 kHz to 3/6/12.75/20/31.8/40 GHz
- Optional second RF path with 100 kHz up to 3/6/12.75/20 GHz
- Versatile configuration: from single-path vector signal generator to multichannel MIMO receiver tester
- Ideal for MIMO, MSR or LTE-Advanced applications thanks to up to eight signal sources and up to 16 fading channels
- Modular architecture for optimal adaptation to the application at hand

## Simplify your setup

- Easy generation of complex signals
- Max. eight baseband generators on two internal baseband modules with realtime coder and ARB
- Internal digital adding of baseband signals, even with frequency and level offset
- Support of all important digital standards such as LTE (up to Release 11), 3GPP FDD/HSPA/HSPA+, GSM/EDGE/EDGE Evolution, TD-SCDMA, CDMA2000<sup>®</sup>/1xEV-DO, WLAN IEEE 802.11a/b/g/n/j/p/ac
- No separate PC software required for digital standards
- LTE and 3GPP test case wizards for easy base station conformance testing in line with 3GPP TS 25.141 or 3GPP TS 36.141
- Envelope tracking and AM/AM, AM/φM predistortion options enable full test and verification of ET modulator chipsets

## Bring reality to your lab

- Optional integrated fading section for channel emulation with up to 160 MHz bandwidth
- All important fading scenarios available as presets
- Installation of up to four fading modules, providing as many as 16 "logical" faders
- Implementation of all key MIMO fading scenarios such as 2x2, 3x3, 4x4, 8x2 and 2x8 using a single instrument
- Support of complex applications such as dual-carrier HSPA, LTE carrier aggregation and multi-user LTE
- Connection of R&S<sup>®</sup>SGT100A signal generator modules to provide up to eight RF paths

## Make your device even better

- Excellent signal quality for high accuracy in spectral and modulation measurements
- I/Q modulator with up to 2 GHz RF modulation bandwidth
- 160 MHz I/Q modulation bandwidth (in RF) with internal baseband
- Exceptional modulation quality, e.g. -49 dB EVM (meas.) with 160 MHz wide WLAN IEEE 802.11ac signals
- High-end pulse modulation with on/off ratio > 80 dB and rise/fall time < 10 ns
- Excellent spectral purity (SSB phase noise -139 dBc (typ.) at 1 GHz, 20 kHz offset)
- 3 GHz, 6 GHz and 12.75 GHz RF paths with electronic attenuator
- Phase coherence option, e.g. for beamforming applications

## Speed up your development

- Intuitive operating concept and clever help functions for quick success
- Block diagram as key operating element to visualize signal flow
- Adaptive GUI for overview of both simple and complex scenarios
- Graphical signal monitoring at practically every point in the signal flow
- Context-sensitive online help system with complete user documentation
- SCPI macro recorder and code generator for generating executable remote control code from manual operating steps (for MATLAB<sup>®</sup>, CVI, etc.)

## Grows with your needs

- Customizing of instrument to accommodate virtually every application
- Advanced plug-in system for retrofitting baseband modules without instrument recalibration
- Software upgrades possible at any time, simple and quick activation via key codes

# Definitions


## General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

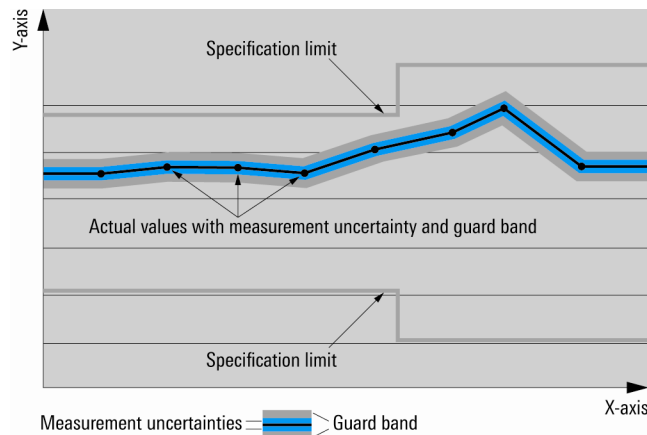

## Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

## Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

## Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

## Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

## Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are indicated as follows: "parameter: value".

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

## Frequency and baseband main module options

### Frequency options

One of the following frequency options must be installed in RF path A:

R&S®SMW-B103	100 kHz to 3 GHz
R&S®SMW-B106	100 kHz to 6 GHz
R&S®SMW-B112	100 kHz to 12.75 GHz
R&S®SMW-B120	100 kHz to 20 GHz
R&S®SMW-B131	100 kHz to 31.8 GHz
R&S®SMW-B140	100 kHz to 40 GHz

In addition, one of the following frequency options can be installed in RF path B:

R&S®SMW-B203	100 kHz to 3 GHz
R&S®SMW-B206	100 kHz to 6 GHz
R&S®SMW-B212	100 kHz to 12.75 GHz
R&S®SMW-B220	100 kHz to 20 GHz

The R&S®SMW-B103, R&S®SMW-B203, R&S®SMW-B106, R&S®SMW-B206, R&S®SMW-B112 and R&S®SMW-B212 options include an electronic attenuator, whereas the R&S®SMW-B120, R&S®SMW-B131, R&S®SMW-B140 and R&S®SMW-B220 options include a mechanical step attenuator.

For possible RF path combinations, see section "RF enhancement options and RF path combinations" below.

### Signal routing and baseband main module options

One of the following options must be installed:

R&S®SMW-B13	one I/Q path to RF section
R&S®SMW-B13T	two I/Q paths to RF section

If RF path B is equipped (or is planned to be retrofitted) with an R&S®SMW-B2xx frequency option, an R&S®SMW-B13T option must be installed as the baseband main module.

## RF enhancement options and RF path combinations

In addition to frequency options, the following RF enhancement options (hardware) can be installed (an R&S®SMW-B13T option must be installed as the baseband main module):

R&S®SMW-B20	FM/φM modulator
R&S®SMW-B22	enhanced phase noise performance and FM/φM modulator

The following combinations of frequency and enhancement options are possible:

Path A \ Path B		3 GHz				6 GHz			12.75 GHz	20 GHz
		(path B not equipped)	R&S®SMW-B203	R&S®SMW-B203 and R&S®SMW-B20	R&S®SMW-B203 and R&S®SMW-B22	R&S®SMW-B206	R&S®SMW-B206 and R&S®SMW-B20	R&S®SMW-B206 and R&S®SMW-B22	R&S®SMW-B212	R&S®SMW-B220
3 GHz	R&S®SMW-B103	•	•	-	-	•	-	-	•	•
	R&S®SMW-B103 and R&S®SMW-B20	•	•	•	-	•	•	-	•	•
	R&S®SMW-B103 and R&S®SMW-B22	•	•	•	•	•	•	•	•	•
6 GHz	R&S®SMW-B106	•	•	-	-	•	-	-	•	•
	R&S®SMW-B106 and R&S®SMW-B20	•	•	•	-	•	•	-	•	•
	R&S®SMW-B106 and R&S®SMW-B22	•	•	•	•	•	•	•	•	•
12.75 GHz	R&S®SMW-B112	•	•	-	-	•	-	-	-	-
	R&S®SMW-B112 and R&S®SMW-B20	•	•	-	-	•	-	-	-	-
	R&S®SMW-B112 and R&S®SMW-B22	•	•	-	-	•	-	-	-	-
20 GHz	R&S®SMW-B120	•	•	-	-	•	-	-	-	•
	R&S®SMW-B120 and R&S®SMW-B20	•	•	-	-	•	-	-	-	-
	R&S®SMW-B120 and R&S®SMW-B22	•	•	-	-	•	-	-	-	-
31.8 GHz	R&S®SMW-B131	•	-	-	-	-	-	-	-	-
	R&S®SMW-B131 and R&S®SMW-B20	•	-	-	-	-	-	-	-	-
	R&S®SMW-B131 and R&S®SMW-B22	•	-	-	-	-	-	-	-	-
40 GHz	R&S®SMW-B140	•	-	-	-	-	-	-	-	-
	R&S®SMW-B140 and R&S®SMW-B20	•	-	-	-	-	-	-	-	-
	R&S®SMW-B140 and R&S®SMW-B22	•	-	-	-	-	-	-	-	-

• = possible, - = not possible

The following option can be installed once, but can be used with all installed RF paths:

R&S®SMW-B90	phase coherence
-------------	-----------------

## RF characteristics

### Frequency

Range	R&S <sup>®</sup> SMW-B103, R&S <sup>®</sup> SMW-B203	100 kHz to 3 GHz
	R&S <sup>®</sup> SMW-B106, R&S <sup>®</sup> SMW-B206	100 kHz to 6 GHz
	R&S <sup>®</sup> SMW-B112, R&S <sup>®</sup> SMW-B212	100 kHz to 12.75 GHz
	R&S <sup>®</sup> SMW-B120, R&S <sup>®</sup> SMW-B220	100 kHz to 20 GHz
	R&S <sup>®</sup> SMW-B131	100 kHz to 31.8 GHz
	R&S <sup>®</sup> SMW-B140	100 kHz to 40 GHz
Resolution of setting		0.001 Hz
Resolution of synthesis	fundamental frequency range = 750 MHz to 1500 MHz	
	standard	5 μHz (nom.)
	with R&S <sup>®</sup> SMW-B22 option	0.2 μHz (nom.)
Setting time	to within $< 1 \times 10^{-7}$ for $f > 200$ MHz or $< 124$ Hz for $f < 200$ MHz, with GUI update stopped	
	after IEC/IEEE bus delimiter	
	R&S <sup>®</sup> SMW-B103, R&S <sup>®</sup> SMW-B203, R&S <sup>®</sup> SMW-B106, R&S <sup>®</sup> SMW-B206	< 1.2 ms, 0.6 ms (typ.)
	R&S <sup>®</sup> SMW-B112, R&S <sup>®</sup> SMW-B212, R&S <sup>®</sup> SMW-B120, R&S <sup>®</sup> SMW-B220	< 1.4 ms, 0.9 ms (typ.)
	R&S <sup>®</sup> SMW-B131, R&S <sup>®</sup> SMW-B140	< 1.5 ms, 1.1 ms (typ.)
Setting time (List mode)	to within $< 1 \times 10^{-7}$ for $f > 200$ MHz or $< 124$ Hz for $f < 200$ MHz, with GUI update stopped	
	after trigger pulse	
	R&S <sup>®</sup> SMW-B103, R&S <sup>®</sup> SMW-B203	< 0.6 ms, 0.4 ms (typ.)
	R&S <sup>®</sup> SMW-B106, R&S <sup>®</sup> SMW-B206	< 0.8 ms, 0.5 ms (typ.)
	R&S <sup>®</sup> SMW-B112, R&S <sup>®</sup> SMW-B212, R&S <sup>®</sup> SMW-B120, R&S <sup>®</sup> SMW-B220	< 1.0 ms, 0.7 ms (typ.)
R&S <sup>®</sup> SMW-B131, R&S <sup>®</sup> SMW-B140	< 1.2 ms, 0.9 ms (typ.)	
Resolution of phase offset setting		0.1°

### Frequency sweep

Operating mode		digital sweep in discrete steps
Trigger modes	free run	auto
	execute one full sweep	single
	execute one step	step
	sweep start and stop controlled by external trigger signal	start/stop
Trigger source		external trigger signal (INST TRG A or B at rear), rotary knob, touchpanel, remote control
Sweep range		full frequency range
Sweep shape		sawtooth, triangle
Step size	linear	full frequency range
	logarithmic	0.01 % to 100 % per step
Dwell time setting range		1 ms to 100 s
Dwell time setting resolution		0.1 ms

### Reference frequency

Frequency error	at time of calibration in production	
	standard	$< 1 \times 10^{-8}$
	with R&S <sup>®</sup> SMW-B22 option	$< 5 \times 10^{-9}$
Aging	after 30 days of uninterrupted operation	
	standard	$1 \times 10^{-9}$ /day, $1 \times 10^{-7}$ /year
	with R&S <sup>®</sup> SMW-B22 option	$5 \times 10^{-10}$ /day, $3 \times 10^{-8}$ /year
Temperature effect	in temperature range from 0 °C to +50 °C	
	standard	$6 \times 10^{-8}$
	with R&S <sup>®</sup> SMW-B22 option	$6 \times 10^{-9}$
Warm-up time	to nominal thermostat temperature	≤ 10 min




<b>Output for internal reference frequency</b>		
Connector type	REF OUT on rear panel	BNC female
Output frequency	sine wave	10 MHz or external input frequency
Output level		2 dBm to 9 dBm, 5 dBm to 8 dBm (typ.)
Source impedance		50 $\Omega$ (nom.)
<b>Input for external reference frequency</b>		
Connector type	REF IN on rear panel	BNC female
Input frequency		1 MHz to 100 MHz
Min. frequency locking range	standard with R&S <sup>®</sup> SMW-B22 option	$\pm 0.5 \times 10^{-6}$ $\pm 1.5 \times 10^{-7}$
Input level range	level limits recommended input level	$\geq -6$ dBm, $\leq 19$ dBm 0 dBm to 19 dBm
Input impedance		50 $\Omega$ (nom.)
<b>Input for electronic tuning of internal reference frequency</b>		
Connector type	EFC on rear panel	BNC female
Sensitivity	standard with R&S <sup>®</sup> SMW-B22 option	$0.5 \times 10^{-8}$ V to $3 \times 10^{-8}$ V, $1 \times 10^{-8}$ V to $2 \times 10^{-8}$ V (typ.) $5 \times 10^{-9}$ V to $2 \times 10^{-8}$ V, $8 \times 10^{-9}$ V to $9.5 \times 10^{-9}$ V (typ.)
Input voltage		-10 V to +10 V
Input impedance	standard with R&S <sup>®</sup> SMW-B22 option	10 k $\Omega$ (nom.) 5 k $\Omega$ (nom.)

## Level


Setting range	100 kHz $\leq f < 1$ MHz 1 MHz $\leq f < 3$ MHz 3 MHz $\leq f \leq 40$ GHz	-145 dBm to +8 dBm -145 dBm to +13 dBm -145 dBm to +30 dBm
Specified level range	100 kHz $\leq f < 1$ MHz 1 MHz $\leq f \leq 3$ MHz R&S <sup>®</sup> SMW-B103, R&S <sup>®</sup> SMW-B203, R&S <sup>®</sup> SMW-B106, R&S <sup>®</sup> SMW-B206, R&S <sup>®</sup> SMW-B112, R&S <sup>®</sup> SMW-B212, R&S <sup>®</sup> SMW-B120, R&S <sup>®</sup> SMW-B220 frequency options: 3 MHz $< f \leq 20$ GHz R&S <sup>®</sup> SMW-B131, R&S <sup>®</sup> SMW-B140 frequency options: 3 MHz $< f \leq 3$ GHz 3 GHz $< f \leq 16$ GHz 16 GHz $< f \leq 19.5$ GHz 19.5 GHz $< f \leq 29$ GHz 29 GHz $< f \leq 33$ GHz 33 GHz $< f \leq 40$ GHz	-120 dBm to +3 dBm (PEP) <sup>1</sup> -120 dBm to +8 dBm (PEP) <sup>1</sup> -120 dBm to +18 dBm (PEP) <sup>1</sup> -120 dBm to +18 dBm (PEP) <sup>1</sup> -120 dBm to +17 dBm (PEP) <sup>1</sup> -120 dBm to +15 dBm (PEP) <sup>1</sup> -120 dBm to +18 dBm (PEP) <sup>1</sup> -120 dBm to +17 dBm (PEP) <sup>1</sup> -120 dBm to +15 dBm (PEP) <sup>1</sup>
Resolution of setting		0.01 dB (nom.)
Level error	level setting characteristic: auto, temperature range from +18 °C to +33 °C 100 kHz $\leq f \leq 3$ GHz 3 GHz $< f \leq 6$ GHz 6 GHz $< f \leq 20$ GHz 20 GHz $< f \leq 40$ GHz	< 0.5 dB < 0.7 dB < 0.9 dB < 1.1 dB
Additional level error	I/Q modulation pulse modulation	< 0.3 dB < 0.5 dB

<sup>1</sup> PEP = peak envelope power.

Output impedance VSWR in 50 $\Omega$ system	level setting characteristic: auto	
	R&S <sup>®</sup> SMW-B103, R&S <sup>®</sup> SMW-B203, R&S <sup>®</sup> SMW-B106, R&S <sup>®</sup> SMW-B206 100 kHz < f $\leq$ 6 GHz	< 1.6
	R&S <sup>®</sup> SMW-B112, R&S <sup>®</sup> SMW-B212 100 kHz < f $\leq$ 12.75 GHz	< 2.0
	R&S <sup>®</sup> SMW-B120, R&S <sup>®</sup> SMW-B131, R&S <sup>®</sup> SMW-B140, R&S <sup>®</sup> SMW-B220, 100 kHz < f $\leq$ 20 GHz	< 1.7
	R&S <sup>®</sup> SMW-B131, R&S <sup>®</sup> SMW-B140, step attenuator = 0 dB 20 GHz < f $\leq$ 38 GHz	< 2.0
	R&S <sup>®</sup> SMW-B140, step attenuator = 0 dB 38 GHz < f $\leq$ 40 GHz	< 2.4
	R&S <sup>®</sup> SMW-B131, R&S <sup>®</sup> SMW-B140, step attenuator $\geq$ 5 dB 20 GHz < f $\leq$ 40 GHz	< 1.9
Setting time	to < 0.1 dB deviation from final value, with GUI update stopped, no relay switchover, f > 10 MHz	
	after IEC/IEEE bus delimiter	< 1 ms, 0.6 ms (typ.)
	with switching of mechanical step attenuator, after IEC/IEEE bus delimiter	< 25 ms
Setting time (List mode)	to < 0.1 dB deviation from final value, with GUI update stopped, no relay switchover, f > 10 MHz	
	after trigger pulse	< 0.8 ms, 0.4 ms (typ.)
Interruption-free level setting range	level setting characteristic: uninterrupted level setting	> 20 dB
Reverse power (from 50 $\Omega$ source)	maximum permissible RF power in output frequency range of RF path with R&S <sup>®</sup> SMW-B103, R&S <sup>®</sup> SMW-B203, R&S <sup>®</sup> SMW-B106, R&S <sup>®</sup> SMW-B206 frequency options Note: The RF path is switched off if the reverse power exceeds a limit (+27 dBm (meas.), depending on RF frequency)	
	1 MHz < f $\leq$ 3 GHz	50 W
	3 GHz < f $\leq$ 6 GHz	10 W
	maximum permissible RF power in output frequency range of RF path with R&S <sup>®</sup> SMW-B112, R&S <sup>®</sup> SMW-B212, R&S <sup>®</sup> SMW-B120, R&S <sup>®</sup> SMW-B220, R&S <sup>®</sup> SMW-B131, R&S <sup>®</sup> SMW-B140 frequency options	
	1 MHz < f $\leq$ 40 GHz	0.5 W
Maximum permissible DC voltage	R&S <sup>®</sup> SMW-B103, R&S <sup>®</sup> SMW-B203, R&S <sup>®</sup> SMW-B106, R&S <sup>®</sup> SMW-B206 frequency options	50 V
	R&S <sup>®</sup> SMW-B112, R&S <sup>®</sup> SMW-B212 frequency options	35 V
	R&S <sup>®</sup> SMW-B120, R&S <sup>®</sup> SMW-B131, R&S <sup>®</sup> SMW-B140, R&S <sup>®</sup> SMW-B220 frequency options	0 V

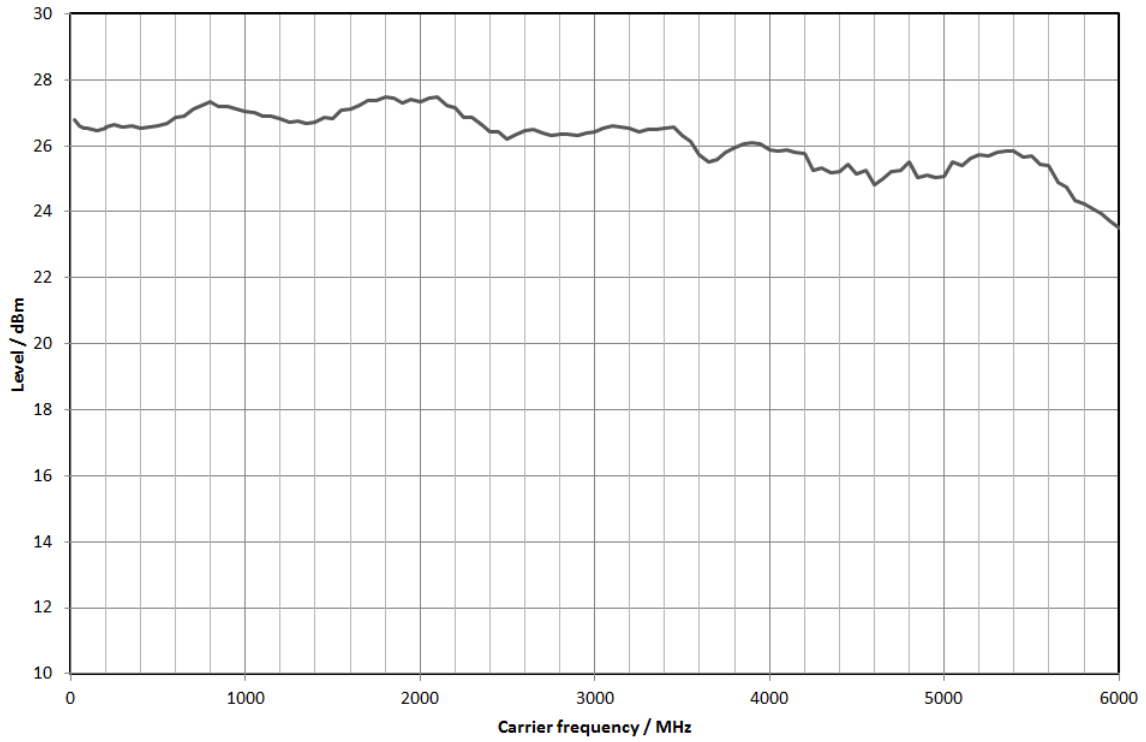

Measured maximum available output level versus frequency with R&S<sup>®</sup>SMW-B106, R&S<sup>®</sup>SMW-B206 frequency options.

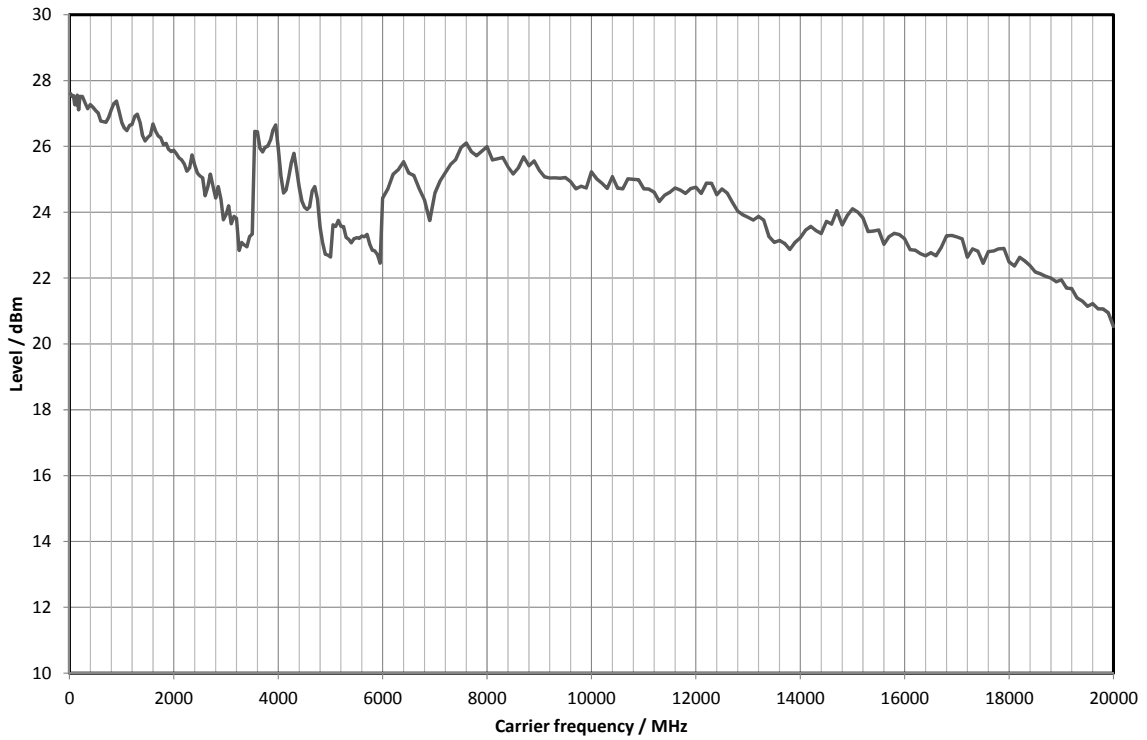

Measured maximum available output level versus frequency with R&S<sup>®</sup>SMW-B120, R&S<sup>®</sup>SMW-B220 frequency options.


## Level sweep

Operating mode		digital sweep in discrete steps
Trigger modes	free run	auto
	execute one full sweep	single
	execute one step	step
	sweep start and stop controlled by external trigger signal	start/stop
Trigger source	internal	external trigger signal (INST TRG A or B at rear), rotary knob, touchpanel, remote control
Trigger slope	external trigger signal	positive, negative
Sweep range	interruption-free level sweep, level setting characteristic: uninterrupted level setting	0.01 dB to 30 dB
Sweep shape		sawtooth, triangle
Step size setting resolution		0.01 dB
Dwell time setting range		1 ms to 100 s
Dwell time setting resolution		0.1 ms


## Spectral purity

Harmonics	CW, level < 10 dBm	
	R&S®SMW-B103, R&S®SMW-B203, R&S®SMW-B106, R&S®SMW-B206, R&S®SMW-B112, R&S®SMW-B212 frequency options	< -30 dBc
	R&S®SMW-B120, R&S®SMW-B131, R&S®SMW-B140, R&S®SMW-B220 frequency options	
	f ≤ 3.5 GHz	< -30 dBc
	f > 3.5 GHz	< -55 dBc
Nonharmonics	CW, I/Q modulation (full-scale DC input), level > -10 dBm, > 10 kHz offset from carrier and outside the modulation spectrum	
	100 kHz ≤ f ≤ 200 MHz	< -77 dBc
	200 MHz < f ≤ 1500 MHz	< -80 dBc
	1500 MHz < f ≤ 3 GHz	< -74 dBc
	3 GHz < f ≤ 6 GHz	< -68 dBc
	6 GHz < f ≤ 12 GHz	< -62 dBc
	12 GHz < f ≤ 24 GHz	< -56 dBc
	24 GHz < f ≤ 40 GHz	< -50 dBc
	CW, I/Q modulation (full-scale DC input), level > -10 dBm, > 850 kHz offset from carrier and outside the modulation spectrum	
	100 kHz ≤ f ≤ 200 MHz	< -77 dBc
	200 MHz < f ≤ 1500 MHz	< -86 dBc
	1500 MHz < f ≤ 3 GHz	< -80 dBc
3 GHz < f ≤ 6 GHz	< -74 dBc	
Nonharmonics with R&S®SMW-B22 option	CW, I/Q modulation (full-scale DC input), level > -10 dBm, > 10 kHz offset from carrier and outside the modulation spectrum	
	100 kHz ≤ f ≤ 200 MHz	< -77 dBc, -87 dBc (typ.)
	200 MHz < f ≤ 1500 MHz	< -90 dBc
	1500 MHz < f ≤ 3 GHz	< -84 dBc
	3 GHz < f ≤ 6 GHz	< -78 dBc
	6 GHz < f ≤ 12 GHz	< -72 dBc
	12 GHz < f ≤ 24 GHz	< -66 dBc
	24 GHz < f ≤ 40 GHz	< -60 dBc
Power supply and mechanically related nonharmonics	at RF = 1 GHz, 50 Hz to 10 kHz from carrier	< -80 dBc
	Subharmonics	
	1.5 GHz < f ≤ 6 GHz	< -74 dBc
	6 GHz < f ≤ 40 GHz	< -60 dBc


Wideband noise	carrier offset > 30 MHz, measurement bandwidth = 1 Hz		
	CW, level = 10 dBm		
	R&S®SMW-B103, R&S®SMW-B203, R&S®SMW-B106, R&S®SMW-B206 frequency options		
	20 MHz ≤ f ≤ 200 MHz	< -146 dBc, -149 dBc (typ.)	
	200 MHz < f ≤ 6 GHz	< -150 dBc, -152 dBc (typ.)	
	R&S®SMW-B112, R&S®SMW-B212, R&S®SMW-B120, R&S®SMW-B220 frequency options		
	20 MHz ≤ f ≤ 200 MHz	< -146 dBc, -149 dBc (typ.)	
	200 MHz < f ≤ 5 GHz	< -150 dBc, -152 dBc (typ.)	
	5 GHz < f ≤ 13 GHz	< -147 dBc, -149 dBc (typ.)	
	13 GHz < f ≤ 20 GHz	< -144 dBc, -146 dBc (typ.)	
	R&S®SMW-B131, R&S®SMW-B140 frequency options		
	20 MHz ≤ f ≤ 200 MHz	< -146 dBc, -149 dBc (typ.)	
	200 MHz < f ≤ 600 MHz	< -148 dBc, -150 dBc (typ.)	
	600 MHz < f ≤ 5 GHz	< -150 dBc, -152 dBc (typ.)	
	5 GHz < f ≤ 13 GHz	< -147 dBc, -149 dBc (typ.)	
	13 GHz < f ≤ 19.5 GHz	< -144 dBc, -146 dBc (typ.)	
	19.5 GHz < f ≤ 30 GHz carrier offset = 30 MHz	< -135 dBc, -138 dBc (typ.)	
	30 GHz < f ≤ 40 GHz carrier offset = 30 MHz	< -131 dBc, -134 dBc (typ.)	
	I/Q modulation with full-scale internal single carrier signal, I/Q input gain = +4 dB, level = 10 dBm		
	20 MHz ≤ f ≤ 200 MHz	< -139 dBc, -142 dBc (typ.)	
	200 MHz < f ≤ 1 GHz	< -141 dBc, -144 dBc (typ.)	
	1 GHz < f ≤ 3 GHz	< -142 dBc, -145 dBc (typ.)	
	3 GHz < f ≤ 13 GHz	< -140 dBc, -143 dBc (typ.)	
	R&S®SMW-B120, R&S®SMW-B220 frequency options		
	13 GHz < f ≤ 20 GHz	< -138 dBc, -141 dBc (typ.)	
	R&S®SMW-B131, R&S®SMW-B140 frequency option		
	13 GHz < f ≤ 19.5 GHz	< -138 dBc, -141 dBc (typ.)	
19.5 GHz < f ≤ 30 GHz carrier offset = 30 MHz	< -133 dBc, -135 dBc (typ.)		
30 GHz < f ≤ 40 GHz carrier offset = 30 MHz	< -130 dBc, -132 dBc (typ.)		
SSB phase noise	CW, carrier offset = 20 kHz, measurement bandwidth = 1 Hz		
	20 MHz ≤ f ≤ 200 MHz	< -128 dBc, -132 dBc (typ.)	
	f = 1 GHz	< -131 dBc, -135 dBc (typ.)	
	f = 2 GHz	< -125 dBc, -129 dBc (typ.)	
	f = 3 GHz	< -121 dBc, -125 dBc (typ.)	
	f = 4 GHz	< -119 dBc, -123 dBc (typ.)	
	f = 6 GHz	< -115 dBc, -119 dBc (typ.)	
	f = 10 GHz	< -111 dBc, -115 dBc (typ.)	
	f = 20 GHz	< -105 dBc, -109 dBc (typ.)	
	f = 30 GHz	< -101 dBc, -105 dBc (typ.)	
	f = 40 GHz	< -99 dBc, -103 dBc (typ.)	
	SSB phase noise with R&S®SMW-B22 option	CW, carrier offset = 20 kHz, measurement bandwidth = 1 Hz	
		20 MHz ≤ f ≤ 200 MHz	< -135 dBc, -138 dBc (typ.)
		f = 1 GHz	< -136 dBc, -139 dBc (typ.)
f = 2 GHz		< -130 dBc, -133 dBc (typ.)	
f = 3 GHz		< -126 dBc, -129 dBc (typ.)	
f = 4 GHz		< -124 dBc, -127 dBc (typ.)	
f = 6 GHz		< -120 dBc, -123 dBc (typ.)	
f = 10 GHz		< -116 dBc, -119 dBc (typ.)	
f = 20 GHz		< -110 dBc, -113 dBc (typ.)	
f = 30 GHz		< -106 dBc, -109 dBc (typ.)	
f = 40 GHz		< -104 dBc, -107 dBc (typ.)	
Residual FM	RMS value at f = 1 GHz		
	300 Hz to 3 kHz	< 1 Hz	
	20 Hz to 23 kHz	< 4 Hz	
Residual AM	RMS value (20 Hz to 23 kHz)	< 0.02 %	

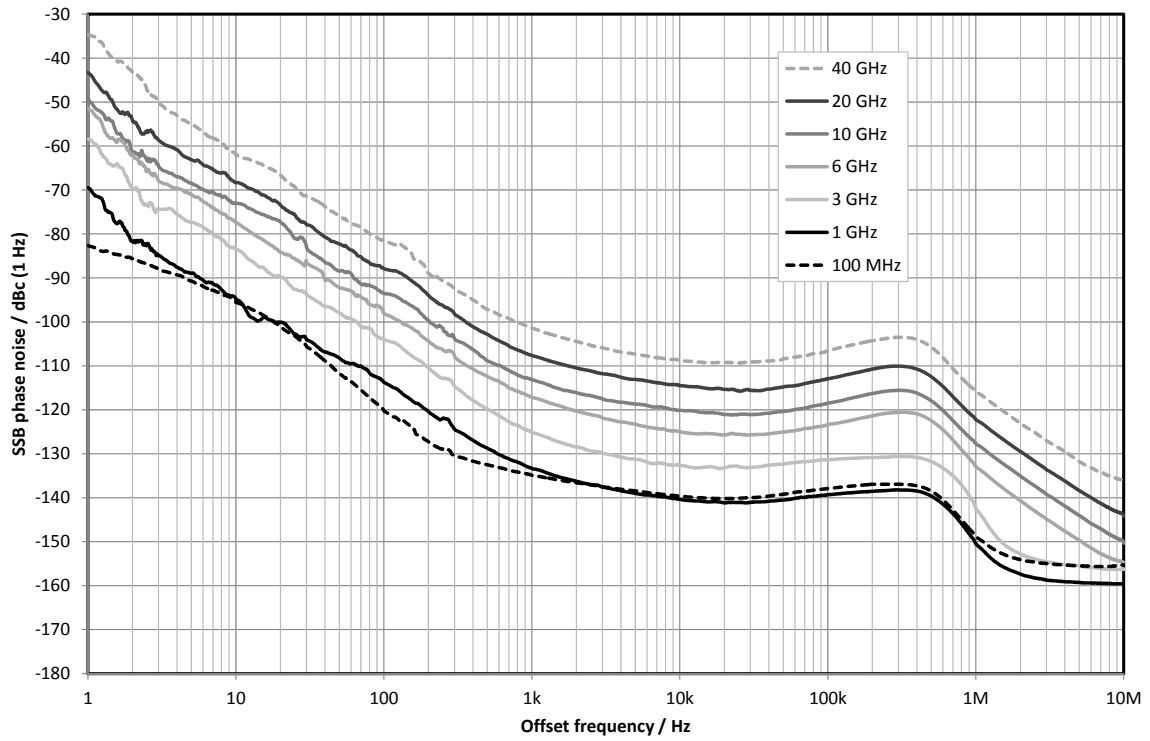


Measured SSB phase noise performance with R&S<sup>®</sup>SMW-B22 option, CW mode.

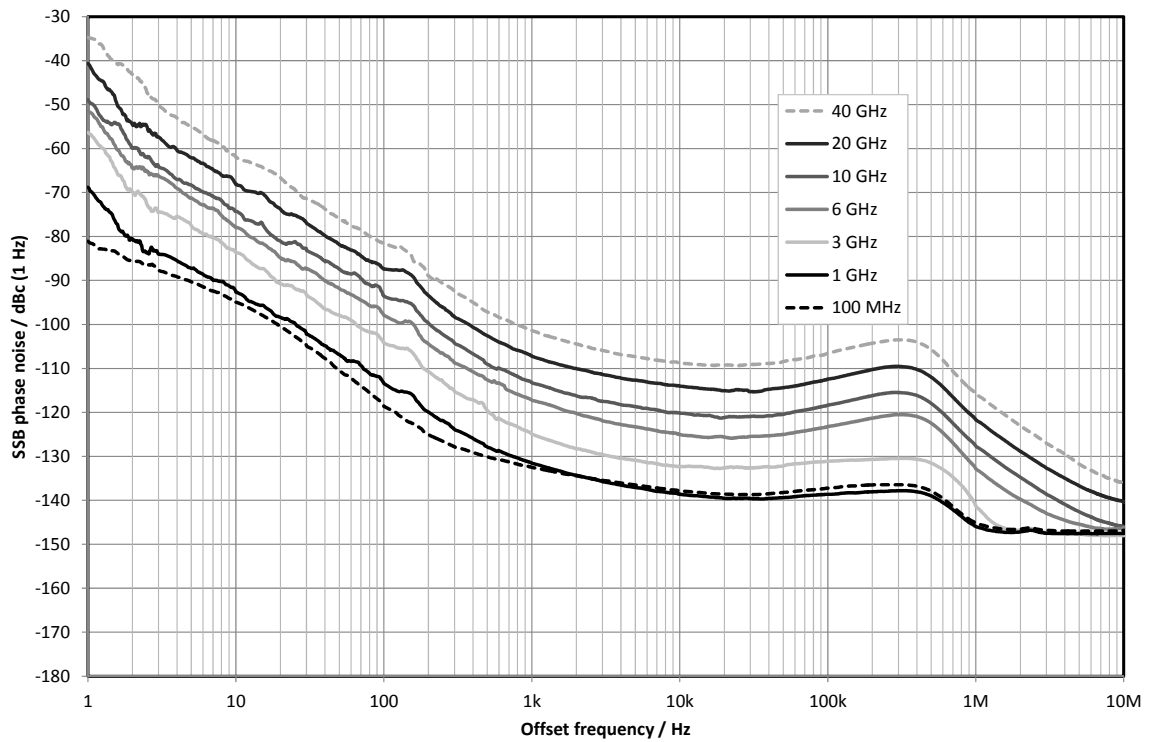

Measured SSB phase noise performance with R&S<sup>®</sup>SMW-B22 option, I/Q mode.

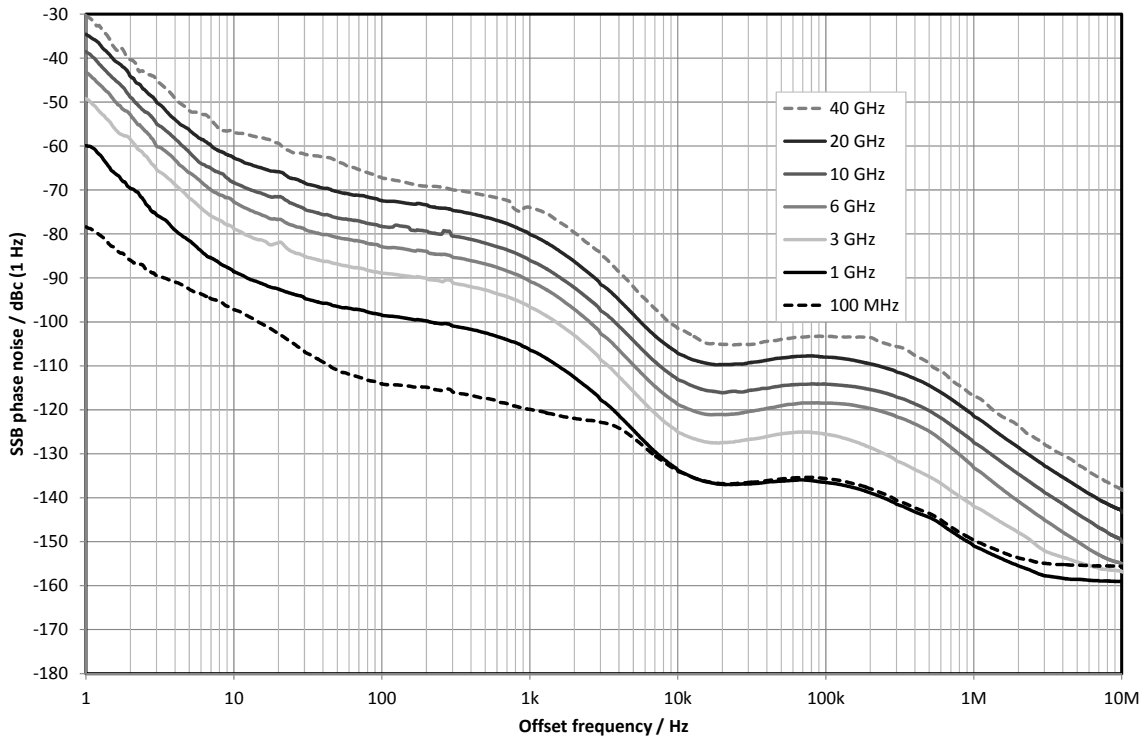

Measured SSB phase noise performance, standard instrument, CW mode.

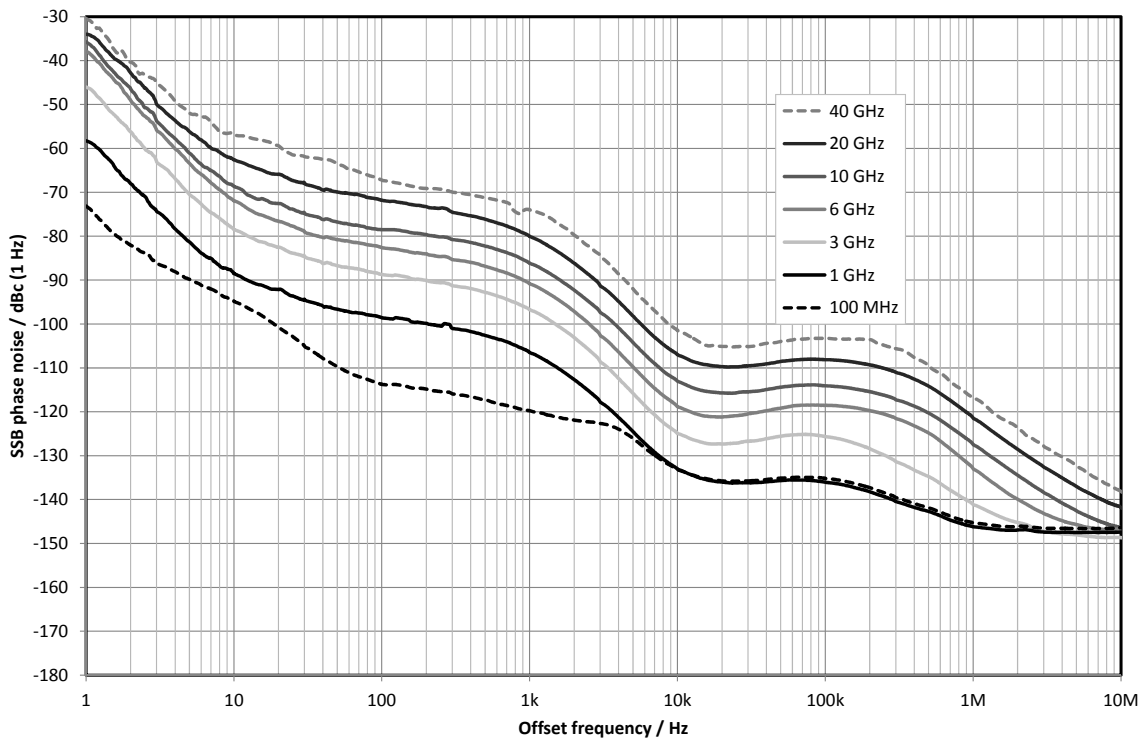

Measured SSB phase noise performance, standard instrument, I/Q mode.

## Phase coherence (R&S® SMW-B90 option)

The R&S® SMW-B90 option provides phase-coherent RF outputs for the two RF paths or two or more instruments. For frequencies above 200 MHz, the LO output and input frequency are set to the output frequency.

LO coupling modes	This mode corresponds to internal LO operation in path A and path B.	A, B internal
	This mode corresponds to internal LO operation in path A, and LO of path B is coupled to path A.	A internal, A → B coupled
	This mode corresponds to external LO operation at the LO IN connector in path A and internal LO operation in path B.	A external, B internal
	This mode corresponds to external LO operation at the REF/LO IN connector in path A and path B.	A external, A → B coupled
REF/LO OUT states	The active LO signal of path B can be routed to the LO OUT connector (in order to couple two or more instruments).	on/off
<b>Input of phase coherence signal</b>		
Connector type	LO IN on rear panel	SMA female
Input impedance		50 Ω (nom.)
Input level range of external LO signal		7 dBm to 13 dBm
Frequency range of external LO signal	for RF setting 200 MHz < f ≤ 6.5 GHz	1.0 × f
	for RF setting 6.5 GHz < f ≤ 13 GHz	0.5 × f
	for RF setting 13 GHz < f ≤ 20 GHz	0.25 × f
<b>Output of phase coherence signal</b>		
Connector type	LO OUT on rear panel	SMA female
Output impedance		50 Ω (nom.)
Output level range of internal LO signal		7 dBm to 13 dBm
Frequency range of internal LO signal	for RF setting 200 MHz < f ≤ 6.5 GHz	1.0 × f
	for RF setting 6.5 GHz < f ≤ 13 GHz	0.5 × f
	for RF setting 13 GHz < f ≤ 26 GHz	0.25 × f
	for RF setting 26 GHz < f ≤ 40 GHz	0.125 × f

## Simultaneous modulation

In the same RF path.

	Amplitude modulation	Frequency modulation	Phase modulation	Pulse modulation	I/Q modulation
Amplitude modulation		●	●	○	–
Frequency modulation	●		–	●	●
Phase modulation	●	–		●	●
Pulse modulation	○	●	●		○
I/Q modulation	–	●	●	○	

● = compatible, – = incompatible,  
○ = compatible with limitations (ALC mode = off)

Two-path instruments: Frequency modulation and phase modulation are not compatible with I/Q modulation in the other RF path.

For simultaneous I/Q and frequency modulation, or simultaneous I/Q and phase modulation, the instrument must be equipped with a two-path signal routing and baseband main module (R&S® SMW-B13T option).



# Analog modulation

## Amplitude modulation

Modulation source		internal, external
External coupling		AC, DC
Modulation depth	modulation is clipped at high levels when maximum PEP is reached	0 % to 100 %
Resolution of setting		0.1 %
AM depth (m) error	$f \leq 30 \text{ GHz}$	
	$f_{\text{mod}} = 1 \text{ kHz}$ and $m < 80 \%$	< (1 % of reading + 1 %)
	$30 \text{ GHz} < f$	
	$f_{\text{mod}} = 1 \text{ kHz}$ and $m < 80 \%$	< (2 % of reading + 1 %)
AM distortion	$f \leq 3 \text{ GHz}$ , $f_{\text{mod}} = 1 \text{ kHz}$	
	$m = 30 \%$	< 0.8 %
	$m = 80 \%$	< 1.4 %
	$3 \text{ GHz} < f \leq 20 \text{ GHz}$ , $f_{\text{mod}} = 1 \text{ kHz}$	
	$m = 30 \%$	< 1 %
	$m = 80 \%$	< 1.6 %
	$20 \text{ GHz} < f$ , $f_{\text{mod}} = 1 \text{ kHz}$	
	$m = 30 \%$	< 1.5 %
	$m = 80 \%$	< 2.4 %
Modulation frequency range		DC, 20 Hz to 500 kHz
Modulation frequency response	AC mode, 20 Hz to 500 kHz	< 1 dB
Incidental $\phi M$ at AM	$m = 30 \%$ , $f_{\text{mod}} = 1 \text{ kHz}$ , peak value	< 0.1 rad

## Frequency modulation (R&S® SMW-B20 or R&S® SMW-B22 option)

R&S® SMW-B13T must be installed.

FM multiplier (rm) for different frequency ranges	$100 \text{ kHz} \leq f \leq 200 \text{ MHz}$	$rm = 1$
	$200 \text{ MHz} < f \leq 375 \text{ MHz}$	$rm = 0.25$
	$375 \text{ MHz} < f \leq 750 \text{ MHz}$	$rm = 0.5$
	$750 \text{ MHz} < f \leq 1500 \text{ MHz}$	$rm = 1$
	$1.5 \text{ GHz} < f \leq 3 \text{ GHz}$	$rm = 2$
	$3 \text{ GHz} < f \leq 6 \text{ GHz}$	$rm = 4$
	$6 \text{ GHz} < f \leq 12 \text{ GHz}$	$rm = 8$
	$12 \text{ GHz} < f \leq 24 \text{ GHz}$	$rm = 16$
	$24 \text{ GHz} < f \leq 40 \text{ GHz}$	$rm = 32$
Modulation source		internal, external, internal + external
External coupling		AC, DC
Operating modes	with R&S® SMW-B20 option with R&S® SMW-B22 option	FM mode: normal FM mode: normal, FM mode: low noise
Maximum deviation	FM mode: normal FM mode: low noise	$rm \times 10 \text{ MHz}$ $rm \times 100 \text{ kHz}$
Resolution of setting		< 200 ppm, min. $rm \times 0.1 \text{ Hz}$
FM deviation error	$f_{\text{mod}} = 10 \text{ kHz}$ , deviation $\leq$ half of maximum deviation	
	internal	< (1.5 % of reading + 20 Hz)
	external	< (2.0 % of reading + 20 Hz)
FM distortion	$f_{\text{mod}} = 10 \text{ kHz}$ , deviation = $rm \times 1 \text{ MHz}$	< 0.1 %
Modulation frequency response	FM mode: normal (DC/AC coupling), 50 $\Omega$ input impedance	
	DC, 10 Hz to 100 kHz	< 0.5 dB
	DC, 10 Hz to 10 MHz, $f \leq 3 \text{ GHz}$	< 3 dB
	DC, 10 Hz to 8 MHz, $f > 3 \text{ GHz}$	
	FM mode: low noise (DC/AC coupling), 50 $\Omega$ input impedance	
	DC, 10 Hz to 100 kHz	< 3 dB
Synchronous AM with FM	40 kHz deviation, $f_{\text{mod}} = 1 \text{ kHz}$	
	$5 \text{ MHz} < f \leq 3 \text{ GHz}$	< 0.1 %
	$3 \text{ GHz} < f \leq 6 \text{ GHz}$	< 0.2 %
	$6 \text{ GHz} < f \leq 40 \text{ GHz}$	< 0.2 %
Carrier frequency offset at FM		< 0.2 % of set deviation

## Phase modulation (R&S<sup>®</sup>SMW-B20 or R&S<sup>®</sup>SMW-B22 option)

R&S<sup>®</sup>SMW-B13T must be installed.

Operating mode		internal, external, internal + external, AC/DC, high bandwidth, high deviation, low noise (with R&S <sup>®</sup> SMW-B22 option only)
φM multiplier (rm) for different frequency ranges	100 kHz ≤ f ≤ 200 MHz	rm = 1
	200 MHz < f ≤ 375 MHz	rm = 0.25
	375 MHz < f ≤ 750 MHz	rm = 0.5
	750 MHz < f ≤ 1500 MHz	rm = 1
	1.5 GHz < f ≤ 3 GHz	rm = 2
	3 GHz < f ≤ 6 GHz	rm = 4
	6 GHz < f ≤ 12 GHz	rm = 8
	12 GHz < f ≤ 24 GHz	rm = 16
	24 GHz < f ≤ 40 GHz	rm = 32
Modulation source		internal, external, internal + external
External coupling		AC, DC
Operating modes	with R&S <sup>®</sup> SMW-B20 option	φM mode: high deviation, φM mode: high bandwidth
	with R&S <sup>®</sup> SMW-B22 option	φM mode: high deviation, φM mode: high bandwidth, φM mode: low noise
Maximum deviation	φM mode: high deviation f <sub>mod</sub> ≤ rm × 10 MHz/deviation	rm × 20.0 rad
	φM mode: high bandwidth	rm × 1.0 rad
	φM mode: low noise	rm × 0.25 rad
Resolution of setting	φM mode: high deviation	< 200 ppm, min. rm × 20 μrad
	φM mode: high bandwidth	< 0.1 %, min. rm × 20 μrad
	φM mode: low noise	< 200 ppm, min. rm × 20 μrad
φM deviation error	f <sub>mod</sub> = 10 kHz, deviation ≤ half of maximum deviation	
	internal	< (1.5 % of reading + 0.01 rad)
	external	< (2.0 % of reading + 0.01 rad)
φM distortion	f <sub>mod</sub> = 10 kHz, half of maximum deviation	< 0.2 %, 0.1 % (typ.)
Modulation frequency response	DC/AC coupling, 50 Ω input impedance	
	high deviation, DC, 10 Hz to 500 kHz	< 1 dB
	high bandwidth, DC, 10 Hz to 10 MHz for f ≤ 3 GHz DC, 10 Hz to 8 MHz for f > 3 GHz	< 3 dB
	low noise, DC, 10 Hz to 100 kHz	< 3 dB

## Pulse modulation (R&S® SMW-K22 option)

If two RF paths are installed (signal paths A and B), pulse modulation can be used either on signal path A or B with one R&S® SMW-K22 option. For pulse modulation to be used on signal paths A and B simultaneously, two R&S® SMW-K22 must be installed.

Modulation source		external, internal
On/off ratio		> 80 dB
Rise/fall time	10 %/90 % of RF amplitude with R&S® SMW-B103, R&S® SMW-B203, R&S® SMW-B106, R&S® SMW-B206 frequency options	
	transition type = fast	< 10 ns
	transition type = smoothed	< 200 ns
	with R&S® SMW-B112, R&S® SMW-B212, R&S® SMW-B120, R&S® SMW-B131, R&S® SMW-B140, R&S® SMW-B220 frequency options	
	transition type = fast	< 10 ns
	transition type = smoothed, only available for f ≤ 5 GHz, CW; f ≤ 3.5 GHz, I/Q- or AM-modulation	< 200 ns
Pulse repetition frequency		0 Hz to 10 MHz
Video feedthrough	with R&S® SMW-B103, R&S® SMW-B203, R&S® SMW-B106, R&S® SMW-B206 frequency options	
	level < 10 dBm	< 10 % of RF
		< 200 mV (V <sub>pp</sub> )
	with R&S® SMW-B112, R&S® SMW-B212, R&S® SMW-B120, R&S® SMW-B131, R&S® SMW-B140, R&S® SMW-B220 frequency options	
	f ≤ 5 GHz: level < 5 dBm	< 10 % of RF
	f > 5 GHz: level < 10 dBm	< 200 mV (V <sub>pp</sub> )
Pulse overshoot		< 10 %

## Input for external modulation signals

<b>Modulation inputs EXT 1, EXT 2 for AM/FM/φM</b>		
Connector type	EXT 1, EXT 2 on rear panel	BNC female
Input impedance	selectable	100 kΩ or 50 Ω (nom.)
Coupling		AC, DC
Input sensitivity	peak value for set modulation depth or deviation	1 V (nom.)
Input damage voltage		±10 V
<b>Modulation input for pulse modulation</b>		
Input		selectable from USER 1, 2, 3 on front panel or USER 4, 5, 6 on rear panel
Connector type	USER 1, 2, 3 on front panel, USER 4, 5, 6 on rear panel	BNC female
Input impedance	selectable	1 kΩ or 50 Ω (nom.)
Threshold voltage		0 V to 2.0 V (nom.)
Input damage voltage		3.3 V (nom.)
Input polarity	selectable	normal, inverse

## Modulation sources for analog modulation

### Internal modulation generator

Shape		sine
Frequency range		0.1 Hz to 1 MHz
Resolution of setting		0.1 Hz
Frequency uncertainty		$< 7 \times 10^{-7}$ Hz + relative deviation of reference frequency $\times$ LF generator frequency (nom.)
Frequency response	up to 1 MHz	0.02 dB (meas.)
Distortion	f < 100 kHz, at $R_L > 50 \Omega$ , level ( $V_{EMF}$ ) < 1 V	< 0.1 %

### Multifunction generator (R&S® SMW-K24 option)

If two RF paths are installed (signal paths A and B), the multifunction generator can be used either on signal path A or B with one R&S® SMW-K24 option. For the multifunction generator to be used on signal paths A and B simultaneously, two R&S® SMW-K24 must be installed.

The multifunction generator option (R&S® SMW-K24) consists of three function generators that can be set independently. Two of the three signal sources can be added with different weighting. The total voltage is limited by the maximum output voltage.

Sources	LF generator 1/2	sine, pulse, triangle, trapezoid
	noise generator	noise amplitude distribution: Gaussian, equal
Frequency range	sine	0.1 Hz to 10 MHz
	pulse, triangle, trapezoid	0.1 Hz to 1 MHz (displayed value)
	noise bandwidth	100 kHz to 10 MHz
Resolution of setting	sine	0.1 Hz
	pulse, triangle, trapezoid	10 ns
	noise bandwidth	100 kHz
Frequency uncertainty		$< 7 \times 10^{-7}$ Hz + relative deviation of reference frequency $\times$ LF generator frequency (nom.)
Frequency response	sine, up to 1 MHz	0.02 dB (meas.)
	sine, up to 10 MHz	0.02 dB (meas.)
Distortion	f < 100 kHz, at $R_L > 50 \Omega$ , level ( $V_{EMF}$ ) 1 V	< 0.1 %

### LF output

Monitoring of resulting modulation signal for		AM, FM, $\phi$ M
Source		LF generator 1, LF generator 2, external 1, external 2, noise generator
Output voltage	$V_p$ at LF connector, open circuit voltage EMF	
Setting range		2 mV to 2 V
Setting resolution		1 mV
Setting accuracy	at 1 kHz	< (1 % of reading + 1 mV)
Output impedance		50 $\Omega$
DC offset		-3.6 V to +3.6 V

## High-performance pulse generator (R&S®SMW-K23 option)

If two RF paths are installed (signal paths A and B), the high-performance pulse generator can be used either on signal path A or B with one R&S®SMW-K23 option. For the high-performance pulse generator to be used on signal paths A and B simultaneously, two R&S®SMW-K23 must be installed.

Pulse modes		single pulse, double pulse
Trigger modes	free run, internally triggered	auto
		external trigger
Active trigger edge		external gate
		positive or negative
Pulse period		
Setting range		20 ns to 100 s
Setting resolution		5 ns
Pulse width		
Setting range	pulse widths of double pulses are independently settable	5 ns to 100 s
Setting resolution		5 ns
Pulse delay		
Setting range		0 ns to 100 s
Setting resolution		5 ns
Double-pulse delay		
Setting range		20 ns to 1 s
Setting resolution		5 ns
Uncertainty for pulse timing	pulse timing generated digitally; ensured by design	relative deviation of reference frequency
External trigger		
Delay	trigger to RF output	50 ns (meas.)
Jitter		< 10 ns (meas.)
PULSE/VIDEO/SYNC output		LVTTTL signal ( $R_L \geq 50 \Omega$ )


## I/Q modulation

### I/Q modulation performance

Operating modes		external wideband I/Q, internal baseband I/Q
RF modulation bandwidth	with external wideband I/Q inputs, I/Q wideband on; with R&S®SMW-B103, R&S®SMW-B203, R&S®SMW-B106, R&S®SMW-B206, R&S®SMW-B120, R&S®SMW-B220, R&S®SMW-B131, R&S®SMW-B140	
	$1 \text{ MHz} \leq f \leq 4 \text{ GHz}$	$\pm 25 \%$ of carrier frequency
	$f > 4 \text{ GHz}$	$\pm 1 \text{ GHz}$
	with external wideband I/Q inputs, I/Q wideband on; with R&S®SMW-B112, R&S®SMW-B212	
	$1 \text{ MHz} \leq f \leq 2 \text{ GHz}$	$\pm 25 \%$ of carrier frequency
	$f > 2 \text{ GHz}$	$\pm 500 \text{ MHz}$
	with external wideband I/Q inputs, I/Q wideband off	
	$f \leq 1000 \text{ MHz}$	$\pm 10 \%$ of carrier frequency
	$f > 1000 \text{ MHz}$	$\pm 100 \text{ MHz}$
	with internal baseband I/Q, I/Q wideband on	
$1 \text{ MHz} < f \leq 320 \text{ MHz}$	$\pm 25 \%$ of carrier frequency	
$f > 320 \text{ MHz}$	$\pm 80 \text{ MHz}$	
RF frequency response in specified RF modulation bandwidth	with external wideband I/Q inputs	
	I/Q wideband on	< 9 dB, < 6 dB (meas.)
	I/Q wideband off	< 5 dB, < 3 dB (meas.)
	with internal baseband I/Q, I/Q wideband on, optimization mode: high quality	< 1.0 dB, < 0.3 dB (meas.)
Carrier leakage <sup>2</sup>	mode: internal baseband I/Q, referenced to full-scale input	
	$f > 19.5 \text{ GHz}$ with R&S®SMW-B131, R&S®SMW-B140	< -40 dBc
Suppression of image sideband for entire instrument in modulation bandwidth	mode: internal baseband I/Q, up to 80 MHz I/Q BW	> 50 dB, 60 dB (typ.)

<sup>2</sup> Value applies after 1 hour warm-up time and recalibration for 4 hours of operation and temperature variations of less than +5 °C.

Two-tone IMD (2 carriers)	PEP = 0 dBm up to 80 MHz carrier spacing	
	f ≤ 3 GHz	< -50 dBc (typ.)
	3 GHz < f ≤ 10 GHz	< -45 dBc (typ.)
	10 GHz < f ≤ 20 GHz	< -40 dBc (typ.)
	20 GHz < f ≤ 30 GHz	< -38 dBc (typ.)
	30 GHz < f ≤ 40 GHz	< -32 dBc (typ.)
I/Q impairments (analog)	These impairments are set within the analog I/Q modulator section. They can be used in external wideband I/Q mode and internal baseband I/Q mode. They cannot be applied to the analog or digital I/Q outputs.	
	I offset, Q offset	
	setting range	-10 % to +10 %
	resolution	0.01 %
	gain imbalance	
	setting range	-1.0 dB to +1.0 dB
	resolution	0.01 dB
	quadrature offset	
	setting range	-10° to +10°
	resolution	0.01°

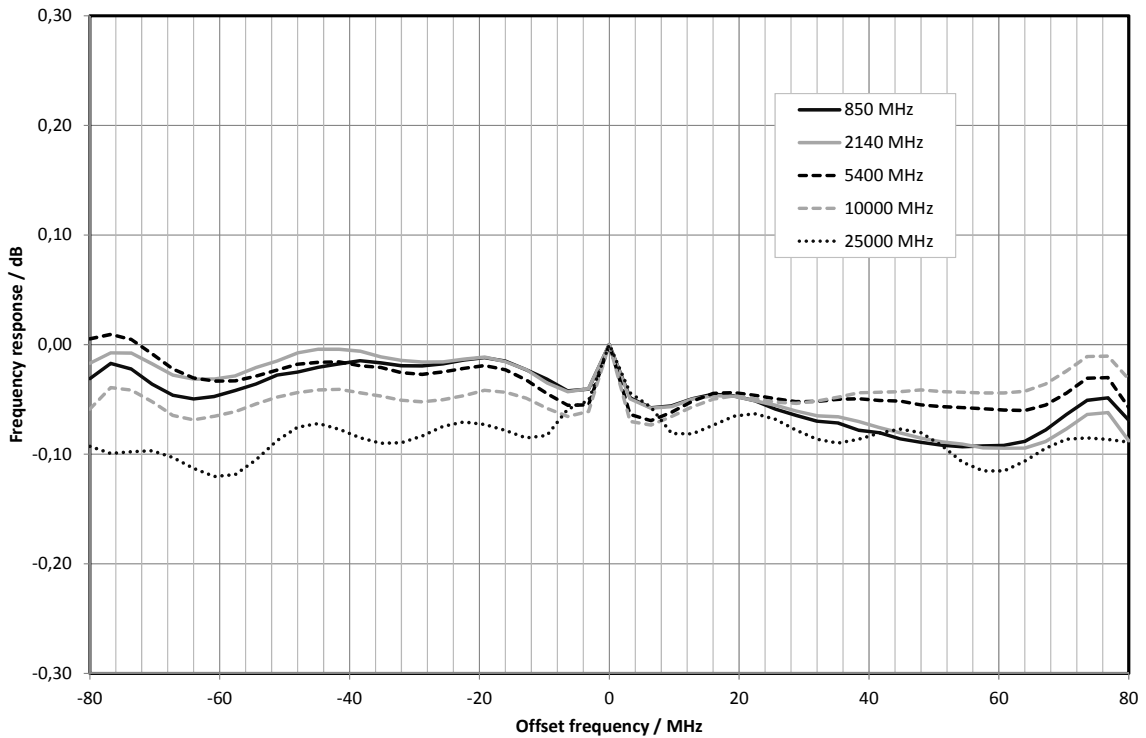

Measured RF modulation frequency response with internal baseband I/Q.

## Analog I/Q inputs

For each installed RF path A or B, one pair of I and Q inputs is available on the front panel (single-ended input mode). With the R&S®SMW-K739 option installed, the input mode for RF path A can also be switched to differential. In this mode, all four available connectors are used for RF path A.

Analog I/Q input signals are directly applied to the analog I/Q modulation circuit and are not routed through the baseband section of the R&S®SMW200A.

Input mode		single-ended
	with R&S®SMW-K739 option, for RF path A	
	R&S®SMW-B103, R&S®SMW-B106, R&S®SMW-B112, R&S®SMW-B120 R&S®SMW-B131, R&S®SMW-B140,	single-ended or differential
	f ≤ 19.5 GHz	single-ended or differential
	f > 19.5 GHz	single-ended
Connector types	I, Q on front panel (for each installed RF path A or B)	BNC female
Input impedance		50 Ω (nom.)
VSWR with frequency options R&S®SMW-B103, R&S®SMW-B203, R&S®SMW-B106, R&S®SMW-B206, R&S®SMW-B112, R&S®SMW-B212, R&S®SMW-B120, R&S®SMW-B220	up to 200 MHz	< 1.2
	200 MHz to 500 MHz	< 1.35
	500 MHz to 1 GHz	< 1.45
VSWR with frequency options R&S®SMW-B131, R&S®SMW-B140	up to 200 MHz, f ≤ 19.5 GHz	< 1.2
	up to 200 MHz, f > 19.5 GHz	< 1.35
	200 MHz to 500 MHz	< 1.35
	500 MHz to 1 GHz	< 1.45
Nominal input voltage for full-scale input		$\sqrt{V_i^2 + V_q^2} = 0.5 \text{ V}$
Damage voltage		±2 V

## Internal baseband characteristics (R&S®SMW-B13 or R&S®SMW-B13T option)

The R&S®SMW-B13 option provides one I/Q path to the RF section (to RF path A) as well as one analog I/Q output (i.e. one I and one Q output connector). The R&S®SMW-B13T option provides two I/Q paths to the RF section (if two RF paths are installed) as well as two analog I/Q outputs. With two RF paths, R&S®SMW-B13T is required.

Either R&S®SMW-B13 or R&S®SMW-B13T must be installed on the instrument.

<b>D/A converter</b>		
Data rate		200 MHz
Resolution		16 bit
Sampling rate		800 MHz (internal interpolation × 4)
<b>Aliasing filter</b> with amplitude, group delay and S <sub>i</sub> correction		
Bandwidth, rolloff to -0.1 dB		80 MHz
D/A converter interpolation spectra	up to 10 MHz	< -80 dBc
	up to 80 MHz	< -73 dBc
<b>I/Q impairments (digital baseband)</b> These impairments are set in the digital baseband section of the R&S®SMW200A. They act on the I/Q signal sent to the I/Q modulator/RF section, as well as on the I/Q signals at the analog or digital I/Q outputs (of the respective path).		
<b>Carrier leakage</b>		
Setting range		-10 % to +10 %
Resolution		0.01 %
<b>I ≠ Q (imbalance)</b>		
Setting range		-1 dB to +1 dB
Resolution		0.001 dB
<b>Quadrature offset</b>		
Setting range		-10° to +10°
Resolution		0.01°

## Analog I/Q outputs (R&S® SMW-B13 or R&S® SMW-B13T option)

Number of I/Q outputs	with R&S® SMW-B13 option	1
	with R&S® SMW-B13T option	2
Output impedance		50 Ω
Output voltage	EMF (output voltage depends on set modulation signal)	1 V (V <sub>p</sub> )
Offset	EMF	< 1 mV
Frequency response <sup>3</sup>	at R <sub>L</sub> = 50 Ω	
Magnitude	up to 10 MHz	0.02 dB (meas.)
	up to 80 MHz	0.03 dB (meas.)
I/Q balance <sup>4</sup>	at R <sub>L</sub> = 50 Ω	
Magnitude	up to 10 MHz	0.01 dB (meas.)
	up to 80 MHz	0.02 dB (meas.)
Spectral purity	at R <sub>L</sub> = 50 Ω	
SFDR (sine)	up to 2 MHz	> 70 dB
	up to 20 MHz	60 dB (meas.)
Wideband noise	10 MHz sine wave at 1 MHz offset	-155 dBc (typ.)

## Differential analog I/Q outputs (R&S® SMW-K16 option)

This option can be installed once if the instrument is equipped with the R&S® SMW-B13 option. If the instrument is equipped with the R&S® SMW-B13T option, differential analog I/Q outputs can be used either on signal path A or B with one R&S® SMW-K16 option. For differential analog I/Q outputs to be used on signal paths A and B simultaneously, two R&S® SMW-K16 must be installed.

Output impedance		
Single-ended		50 Ω
Differential		100 Ω
Output voltage	output voltage depends on set modulation signal	
Single-ended	EMF	0.02 V to 2 V (V <sub>p</sub> )
Resolution		1 mV
Differential	EMF	0.04 V to 4 V (V <sub>pp</sub> )
Resolution		2 mV
Bias voltage (single-ended and differential)	EMF	-3.6 V to +3.6 V <sup>5</sup>
Resolution		2 mV
Uncertainty		1 % + 4 mV
Offset voltage		
Differential	EMF	-300 mV to +300 mV
Resolution		0.1 mV
Uncertainty		1 % + 0.1 % × bias voltage + 1 mV
Differential signal balance	at R <sub>L</sub> = 50 Ω, output voltage > 0.5 V (V <sub>p</sub> )	
Magnitude	up to 10 MHz	< 0.2 dB, 0.05 dB (meas.)
	up to 80 MHz	0.2 dB (meas.)
Frequency response <sup>6</sup>	at R <sub>L</sub> = 50 Ω, output voltage > 0.5 V (V <sub>p</sub> )	
Magnitude	up to 10 MHz	0.02 dB (meas.)
	up to 80 MHz	0.03 dB (meas.)

<sup>3</sup> "Optimize internal I/Q impairments for RF output" switched off.

<sup>4</sup> Value applies after 1 hour warm-up time and recalibration for 4 hours of operation and temperature variations of less than +5 °C.

<sup>5</sup> The magnitude of the sum of output voltage and bias voltage must not exceed 4 V.

<sup>6</sup> "Optimize internal I/Q impairments for RF output" switched off.



## Envelope tracking (R&S®SMW-K540 option)

With this option, the analog I/Q outputs can be used to generate an analog signal corresponding to the envelope of the I/Q signal to test envelope tracking modulators.

This option can be installed once if the instrument is equipped with the R&S®SMW-B13 option. If the instrument is equipped with the R&S®SMW-B13T option, envelope tracking can be used either on signal path A or B with one R&S®SMW-K540 option. For envelope tracking to be used on signal paths A and B simultaneously, two R&S®SMW-K540 must be installed.

For each R&S®SMW-K540 option to be installed, an R&S®SMW-K16 option must be installed, and the instrument must be equipped with at least one baseband generator (R&S®SMW-B10 option)

<b>General</b>		
Envelope voltage adaptation		auto normalized, auto power, manual
Output type		single-ended, differential
Bias voltage	see section "Differential analog I/Q outputs"	
Offset voltage	see section "Differential analog I/Q outputs"	
Envelope to RF delay		
Setting range		-1 µs to +1 µs
Setting resolution		1 ps
Shaping		off, linear, from table, polynomial, detrouching
<b>Envelope voltage adaptation modes: auto normalized and auto power</b>		
Power amplifier input power $P_{in}$		
Setting range		-145.00 dB to +30.00 dB
Setting resolution		0.01 dB
Power amplifier supply voltage $V_{cc}$	$V_{cc} = \text{envelope voltage} \times \text{DC modulator gain} + V_{cc, \text{offset}}$	
DC modulator gain		-20.00 dB to +20.00 dB
Power amplifier offset voltage $V_{cc, \text{offset}}$		0 V to 30 V
<b>Envelope voltage adaptation mode: manual</b>		
Pregain		
Setting range		-20.00 dB to 0.00 dB
Setting resolution		0.01 dB
Postgain		
Setting range		-3.00 dB to +20.00 dB
Setting resolution		0.01 dB
Clipping level	upper and lower limit can be set separately	0 % to 100 %
Maximum output voltage	see "Output voltage" in section "Differential analog I/Q outputs"	

## AM/AM, AM/φM predistortion (R&S®SMW-K541 option)

At least one I/Q baseband generator (R&S®SMW-B10 option) must be installed. If the instrument is equipped with two R&S®SMW-B10 options, predistortion can be used either on signal path A or B with one R&S®SMW-K541 option. For AM/AM, AM/φM predistortion to be used on signal paths A and B simultaneously, two R&S®SMW-K541 must be installed.

State		on, off
Maximum input power (PEP <sub>in</sub> max)		
Setting range		-145.00 dB to +30.00 dB
Setting resolution		0.01 dB
Shaping		polynomial, from table

## Digital baseband inputs/outputs

Depending on the installed software and hardware options, the R&S®SMW200A is able to receive digital baseband signals and to output digital baseband signals. The digital I/Q input/output can be used for the lossless connection of the R&S®SMW200A to the digital I/Q input/output of other Rohde & Schwarz instruments (for example the R&S®CMW500 wideband radio communication tester in fading applications).

Digital baseband outputs: At least one R&S®SMW-K18 option must be installed. This option can be installed once if the instrument is equipped with the R&S®SMW-B13 option. If the instrument is equipped with the R&S®SMW-B13T option, digital baseband outputs can be used either on signal path A or B with one R&S®SMW-K18 option. For digital baseband outputs to be used on signal paths A and B simultaneously, two R&S®SMW-K18 must be installed. Furthermore, to enable two or more digital baseband outputs in MIMO modes, two R&S®SMW-K18 must be installed.

The following table gives an overview of which software and hardware options are required for which digital I/Q connectivity:

Minimum required R&S®SMW200A options	Digital I/Q inputs	Digital I/Q outputs
R&S®SMW-B13 + 1 × R&S®SMW-K18	–	1
R&S®SMW-B13T + 2 × R&S®SMW-K18	–	2
1 × R&S®SMW-B10	1	–
1 × R&S®SMW-B10 + R&S®SMW-B13 + 1 × R&S®SMW-K18	1	1
1 × R&S®SMW-B10 + R&S®SMW-B13T + 2 × R&S®SMW-K18	1	2
2 × R&S®SMW-B10	2	–
2 × R&S®SMW-B10 + R&S®SMW-B13 + 1 × R&S®SMW-K18	2	1
2 × R&S®SMW-B10 + R&S®SMW-B13T + 2 × R&S®SMW-K18	2	2
2 × R&S®SMW-B10 + 4 × R&S®SMW-B14 + R&S®SMW-B13T + 2 × R&S®SMW-K18	depending on selected system configuration (for required additional options for specific system configurations, see section "Multichannel, MIMO, fading and noise", specifications for R&S®SMW-K74, -K76 options)	
3x1	3	1
3x2	3	2
3x3	3	3
1x3	1	3
2x3	2	3
4x1	4	1
4x2	4	2
4x3	4	3
4x4	4	4
1x4	1	4
2x4	2	4
3x4	3	4
8x1	-	1
8x2	-	2
1x8	1	6
2x8	2	6
3x1x1	3	3
4x1x1	4	4
5x1x1	–	3
6x1x1	–	4
7x1x1	–	5
8x1x1	–	6
2x1x2	2	4
2x2x1	4	2
2x2x2	4	4
3x2x1	2	3
3x1x2, 3x2x2,	2	4
4x2x1	2	4
4x1x2, 4x2x2	2	6

**Output parameters**

Interface		
Standard		in line with R&S® Digital I/Q Interface <sup>7</sup> , I/Q data and control signals, data and interface clock
Level		LVDS
Connector		26-pin MDR
I/Q sample rate	With source 'user-defined', the sample rate must be entered via the parameter 'sample rate', no I/Q data clock being necessary. With source 'digital I/Q out', the sample rate will be estimated on the basis of the applied I/Q data clock.	
Source		user-defined, digital I/Q out
Sample rate	max. sample rate depending on connected receiving device	400 Hz to 200 MHz
Resolution (user-defined)		0.001 Hz
Frequency uncertainty (user-defined)		$< (5 \times 10^{-14} + \text{relative deviation of reference frequency}) \times \text{sample rate (nom.)}$
I/Q data		
Resolution		up to 18 bit
Logic format		two's complement
Physical signal level		
Setting range		0 to -60 dBFS
Resolution		0.01 dBFS
Bandwidth (RF)	sample rate = 200 MHz (no interpolation, user-defined)	160 MHz
	sample rate < 200 MHz (interpolation)	$0.8 \times \text{sample rate}$
Control signals	markers	3

**Input parameters**

Input level	peak level	
Peak level		
Setting range		-60 dB to +3 dB, referenced to full scale
Resolution		0.01 dB
Crest factor		
Setting range		0 dB to +30 dB
Resolution		0.01 dB
Adjust level function	automatically determines peak level and crest factor of input signal	
I/Q swap	I and Q signals swapped	on/off
Interface		
Standard		in line with R&S® Digital I/Q Interface PAD-R <sup>8</sup> , I/Q data and control signals, data and interface clock
Level		LVDS
Connector		26-pin MDR
I/Q sample rate	With source 'user-defined', the sample rate must be entered via the parameter 'sample rate', no I/Q data clock being necessary. With source 'digital I/Q in', the sample rate will be estimated on the basis of the applied I/Q data clock.	
Source		user-defined, digital I/Q in
Sample rate	max. sample rate depending on connected transmitting device	400 Hz to 200 MHz
Resolution (user-defined)		0.001 Hz
Frequency uncertainty (user-defined)		$< (5 \times 10^{-14} + \text{relative deviation of reference frequency}) \times \text{sample rate (nom.)}$
I/Q data		
Resolution		18 bit
Logic format		two's complement
Bandwidth	sample rate = 200 MHz (no interpolation, user-defined)	160 MHz
	sample rate < 200 MHz (interpolation)	$0.8 \times \text{sample rate}$
Control signals	markers	3

<sup>7</sup> R&S® Digital I/Q Interface PAD-R is a Rohde & Schwarz internal company standard for the transmission of digital I/Q data. It is supported by a wide range of signal generators, signal analyzers and radio communication testers.

<sup>8</sup> R&S® Digital I/Q Interface PAD-R is a Rohde & Schwarz internal company standard for the transmission of digital I/Q data. It is supported by a wide range of signal generators, signal analyzers and radio communication testers.

## I/Q baseband generator (R&S®SMW-B10 option) – arbitrary waveform mode

One or two R&S®SMW-B10 can be installed. Their I/Q signals can be assigned a frequency offset and/or be added in the digital domain with settable level ratio.

Waveform length		1 sample to 64 Msample in one-sample steps
	with R&S®SMW-K511 option (memory extension)	1 sample to 512 Msample in one-sample steps
	with R&S®SMW-K512 option (memory extension)	1 sample to 1 Gsample in one-sample steps
Nonvolatile memory		hard disk
Sample resolution	equivalent to D/A converter	16 bit
Sample rate		400 Hz to 150 MHz
	with R&S®SMW-K522 option	400 Hz to 200 MHz
Sample frequency error	internal clock	$< (5 \times 10^{-14} + \text{relative deviation of reference frequency}) \times \text{sample rate (nom.)}$
Sample clock source		internal, external
Bandwidth (RF)	using the maximum sample rate, rolloff to $-0.1$ dB	120 MHz
	using a reduced sample rate, rolloff to $-0.1$ dB (The waveform is automatically interpolated to the internal sample rate of 150 MHz.)	$0.8 \times \text{sample rate}$
Bandwidth (RF) with R&S®SMW-K522 option	using the maximum sample rate, rolloff to $-0.1$ dB	160 MHz
	using a reduced sample rate, rolloff to $-0.1$ dB (The waveform is automatically interpolated to the internal sample rate of 200 MHz.)	$0.8 \times \text{sample rate}$
<b>Frequency offset</b>	With the aid of the frequency offset, the center frequency of the wanted baseband signal can be shifted. The restrictions caused by the modulation bandwidth still apply.	
Frequency offset setting range		$-60$ MHz to $+60$ MHz
	with R&S®SMW-K522 option	$-80$ MHz to $+80$ MHz
Frequency offset setting resolution		$0.01$ Hz
Frequency offset error		$< 7 \times 10^{-7}$ Hz + relative deviation of reference frequency $\times$ frequency offset (nom.)
<b>Triggering</b>	A trigger event restarts I/Q generation. The I/Q signal is then synchronous with the trigger (with a specific timing jitter).	
Trigger source	event triggered via GUI or remote command	internal
	event triggered by other baseband generator	internal (baseband A/B)
	event triggered by external trigger signal	external
Trigger modes	The signal is generated continuously.	auto
	The signal is generated continuously. A trigger event causes a restart.	retrig
	The signal is started only when a trigger event occurs. Subsequent trigger events are ignored.	armed auto
	The signal is started only when a trigger event occurs. Every subsequent trigger event causes a restart.	armed retrig
	The signal is started only when a trigger event occurs. The signal is generated once.	single

External trigger input		selectable from USER 1, 2, 3 on front panel or T/M/C 1, T/M 2, T/M 3 of respective baseband generator on rear panel
Connector type	USER 1, 2, 3 on front panel, T/M/C 1, T/M 2, T/M 3 of respective baseband generator on rear panel	BNC female
Input level		0 V to 3 V (nom.)
Threshold		settable between 10 mV and 1.9 V
Input impedance	selectable	1 k $\Omega$ or 50 $\Omega$ (nom.)
Trigger jitter		$\pm 2.5$ ns
External trigger delay		
Setting range		0 sample to $(2^{16} - 1)$ sample
Setting resolution	without R&S <sup>®</sup> SMW-B14 option with R&S <sup>®</sup> SMW-B14 option	5 ns 1/fading clockrate (= 5 ns or 10 ns)
External trigger inhibit		
Setting range		0 sample to $(2^{26} - 1)$ sample
Setting resolution		1 sample
External trigger pulse width		> 7.5 ns
<b>Marker signals</b>		
Number of marker signals		3
Operating modes		unchanged, restart, pulse, pattern, ratio
Marker outputs		selectable from USER 1, 2, 3 on front panel or T/M/C 1, T/M 2, T/M 3 of respective baseband generator on rear panel
Connector type	USER 1, 2, 3 on front panel, T/M/C 1, T/M 2, T/M 3 of respective baseband generator on rear panel	BNC female
Level		LVTTTL
Marker delay		
Setting range		0 sample to (waveform length – 1) sample
	without recalculation	0 sample to 2000 sample
Setting resolution		1 sample
<b>Multisegment waveform mode</b>		
Number of segments		1 to 1024
Changeover modes		GUI, remote control, external trigger
Extended trigger modes		same segment, next segment, next segment seamless, sequencer
Changeover time	at 50 MHz clock rate, external trigger, without clock change	20 $\mu$ s (meas.)
Seamless changeover		output up to end of current segment, followed by changeover to next segment
Sequencer play list length		max. 1024
Sequencer segment repetitions		max. 1048575
<b>Multicarrier waveform mode</b>		
Number of carriers		max. 512
Total RF bandwidth		max. 120 MHz
	with R&S <sup>®</sup> SMW-K522 option	max. 160 MHz
Carrier spacing		
Setting range		depends on number of carriers and signal RF bandwidth
Setting resolution		0.01 Hz
Crest factor modes		maximize, minimize, off
Signal period modes		longest file, shortest file, user (max. 1 s)
Single carrier gain		
Setting range		–80 dB to 0 dB
Setting resolution		0.01 dB
Single carrier start phase		
Setting range		0° to 360°
Setting resolution		0.01°
Single carrier delay		
Setting range		0 s to 1 s
Setting resolution		1 ns

## I/Q baseband generator (R&S® SMW-B10 option) – realtime operation (custom digital modulation)

One or two R&S® SMW-B10 can be installed. The I/Q signals can be assigned a frequency offset and/or be added in the digital domain with settable level ratio.

Types of modulation		
ASK		
Modulation index		0 % to 100 %
Resolution		0.1 %
FSK		
Deviation		0.1 to $1.5 \times f_{\text{sym}}$
Maximum		10 MHz
Resolution		0.1 Hz
Variable FSK		
Deviations		$-1.5 \times f_{\text{sym}}$ to $+1.5 \times f_{\text{sym}}$
Maximum		10 MHz
Resolution		0.1 Hz
PSK		
QAM		
		16QAM, 32QAM, 64QAM, 256QAM, 1024QAM, $\pi/4$ -16QAM, $-\pi/4$ -32QAM (for EDGE+)
<b>Symbol rate</b>	If an external clock is used, the applied data rate may deviate from the set clock rate by $\pm 2$ %.	
Operating mode		internal, external
Setting range	ASK, PSK and QAM	400 Hz to 50 MHz
	FSK	400 Hz to 40 MHz
Resolution		0.001 Hz
Frequency uncertainty (internal)		$< (5 \times 10^{-14} + \text{relative deviation of reference frequency}) \times \text{symbol rate (nom.)}$
External clock		symbol
External clock rate		max. 200 MHz
External clock input		selectable from USER 1, 2, 3 on front panel or T/M/C 1 of respective baseband generator on rear panel
Connector type	USER 1, 2, 3 on front panel T/M/C 1 of respective baseband generator on rear panel	BNC female
Input level		0 V to 3 V (nom.)
Threshold		settable between 10 mV and 1.9 V
Input impedance	selectable	1 k $\Omega$ or 50 $\Omega$ (nom.)
<b>Baseband filter</b>	Any filter can be used with any type of modulation. The bandwidth of the modulation signal is max. 50 MHz; the signal is clipped if the bandwidth is exceeded.	
Filter types		cosine, root cosine, Gaussian, cdmaOne, cdmaOne + equalizer, cdmaOne 705 kHz, cdmaOne 705 kHz + equalizer, CDMA2000® 3x, APCO25 C4FM, EDGE narrow pulse, EDGE wide pulse rectangular, split phase
Filter parameter		
Setting range	cosine, root cosine (filter parameter $\alpha$ )	0.05 to 1.00
	Gaussian (filter parameter $B \times T$ )	0.15 to 2.50
	split phase (filter parameter $B \times T$ )	0.15 to 2.50
Setting resolution		0.01
<b>Coding</b>	Not all coding methods can be used with every type of modulation.	off, differential, diff. phase, diff. + Gray, Gray, GSM, NADC, PDC, PHS, TETRA, APCO25 (PSK), APCO25 (8PSK), PWT, TFTS, INMARSAT, VDL, EDGE, APCO25(FSK), ICO, CDMA2000®, WCDMA

<b>Data sources</b>		PRBS: 9, 11, 15, 16, 20, 21, 23, All 0, All 1, pattern (length: 1 bit to 64 bit), data lists
<b>Data lists</b>		
Output memory	standard	8 bit to 2 Gbit
	with R&S®SMW-K511 option (memory extension)	8 bit to 16 Gbit
	with R&S®SMW-K512 option (memory extension)	8 bit to 32 Gbit
Nonvolatile memory		hard disk
<b>Predefined settings</b>	modulation, filter, symbol rate and coding in line with standard	
Standards		APCO, Bluetooth®, DECT, ETC, GSM, GSM EDGE, NADC, PDC, PHS, TETRA, WCDMA 3GPP, TD-SCDMA, CDMA2000® Forward, CDMA2000® Reverse, Worldspace
<b>Frequency offset</b>	With the aid of the frequency offset, the center frequency of the wanted baseband signal can be shifted. The restrictions caused by the modulation bandwidth still apply.	
Frequency offset setting range		-60 MHz to +60 MHz
	with R&S®SMW-K522 option	-80 MHz to +80 MHz
Frequency offset setting resolution		0.01 Hz
Frequency offset error		$< 7 \times 10^{-7}$ Hz + relative deviation of reference frequency) $\times$ frequency offset (nom.)
<b>Triggering</b>		
Trigger source	event triggered via GUI or remote command	internal
	event triggered by other baseband generator	internal (baseband A/B)
	event triggered by external trigger signal	external
Trigger modes	The signal is generated continuously.	auto
	The signal is generated continuously. A trigger event causes a restart.	retrig
	The signal is started only when a trigger event occurs. Subsequent trigger events are ignored.	armed auto
	The signal is started only when a trigger event occurs. Every subsequent trigger event causes a restart.	armed retrig
	The signal is started only when a trigger event occurs. The signal is generated once.	single
External trigger input		selectable from USER 1, 2, 3 on front panel or T/M/C 1, T/M 2, T/M 3 of respective baseband generator on rear panel
Connector type	USER 1, 2, 3 on front panel, T/M/C 1, T/M 2, T/M 3 of respective baseband generator on rear panel	BNC female
Input level		0 V to 3 V (nom.)
Threshold		settable between 10 mV and 1.9 V
Input impedance	selectable	1 k $\Omega$ or 50 $\Omega$ (nom.)
Trigger jitter		$\pm 2.5$ ns
<b>External trigger delay</b>		
Setting range		0 symbol to ( $2^{16} - 1$ ) symbol
Setting resolution	without R&S®SMW-B14 option	5 ns
	with R&S®SMW-B14 option	1/fading clockrate (=5 ns or 10 ns)
<b>External trigger inhibit</b>		
Setting range		0 symbol to ( $2^{26} - 1$ ) symbol
Setting resolution		1 symbol
External trigger pulse width		> 7.5 ns


<b>Marker signals</b>		
Number of marker signals		3
Operating modes		control list, pulse, pattern, ratio
Marker outputs		selectable from USER 1, 2, 3 on front panel or T/M/C 1, T/M 2, T/M 3 of respective baseband generator on rear panel
Connector type	USER 1, 2, 3 on front panel, T/M/C 1, T/M 2, T/M 3 of respective baseband generator on rear panel	BNC female
Level		LVTTL
Marker delay		
Setting range		0 symbol to $(2^{24} - 1)$ symbol
	without recalculation	0 symbol to 2000 symbol
Setting resolution		1 symbol

## Modulation performance for digital standards and modulation systems


### 3GPP FDD (with R&S® SMW-K42 option)

Error vector magnitude	1 DPCH, RMS, frequency = 1800 MHz to 2200 MHz	< 0.8 %, 0.3 % (meas.)
Adjacent channel leakage ratio (ACLR)	test model 1, 64 DPCH, frequency = 1800 MHz to 2200 MHz, average channel power ≤ 5 dBm, with R&S® SMW-B103, R&S® SMW-B203, R&S® SMW-B106, R&S® SMW-B206 frequency options	
	5 MHz offset	> 70 dB
	10 MHz offset	> 72 dB
	test model 1, 64 DPCH, frequency = 1800 MHz to 2200 MHz, average channel power ≤ 0 dBm, with R&S® SMW-B112, R&S® SMW-B212 frequency options	
	5 MHz offset	> 68 dB
	10 MHz offset	> 70 dB
	test model 1, 64 DPCH, frequency = 1800 MHz to 2200 MHz, average channel power ≤ 0 dBm, with R&S® SMW-B120, R&S® SMW-B131, R&S® SMW-B140, R&S® SMW-B220 frequency options	
	5 MHz offset	> 70 dB
	10 MHz offset	> 72 dB



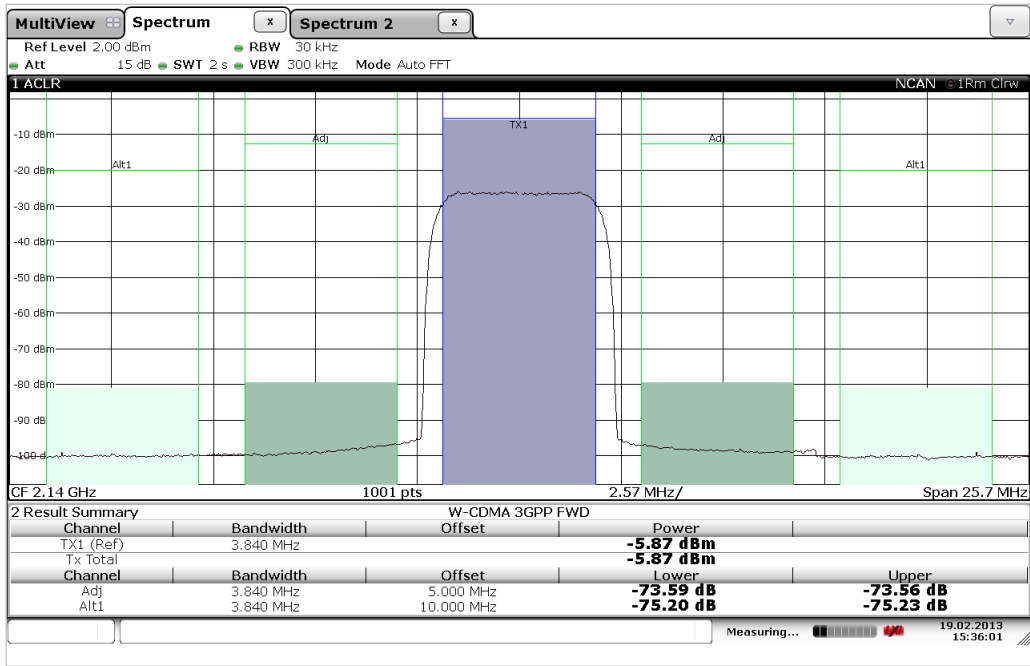


Measured ACPR for 3GPP test model 1, 64 DPCH.

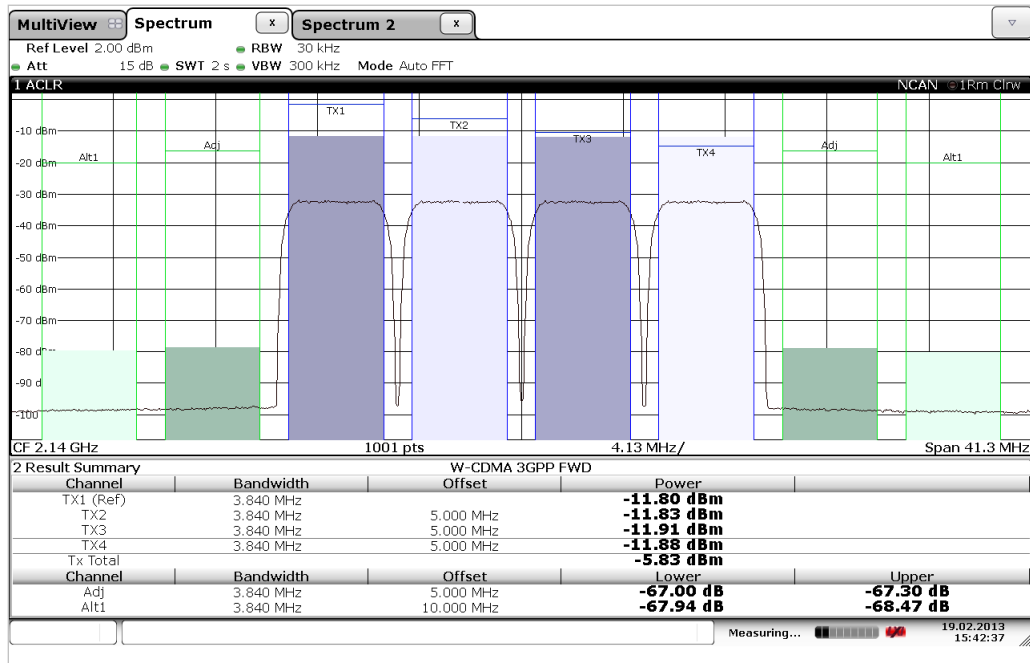

Measured ACPR for a 3GPP four-carrier signal with test model 1, 64 DPCH on each carrier.


### IEEE 802.11ac (with R&S® SMW-K86 option)

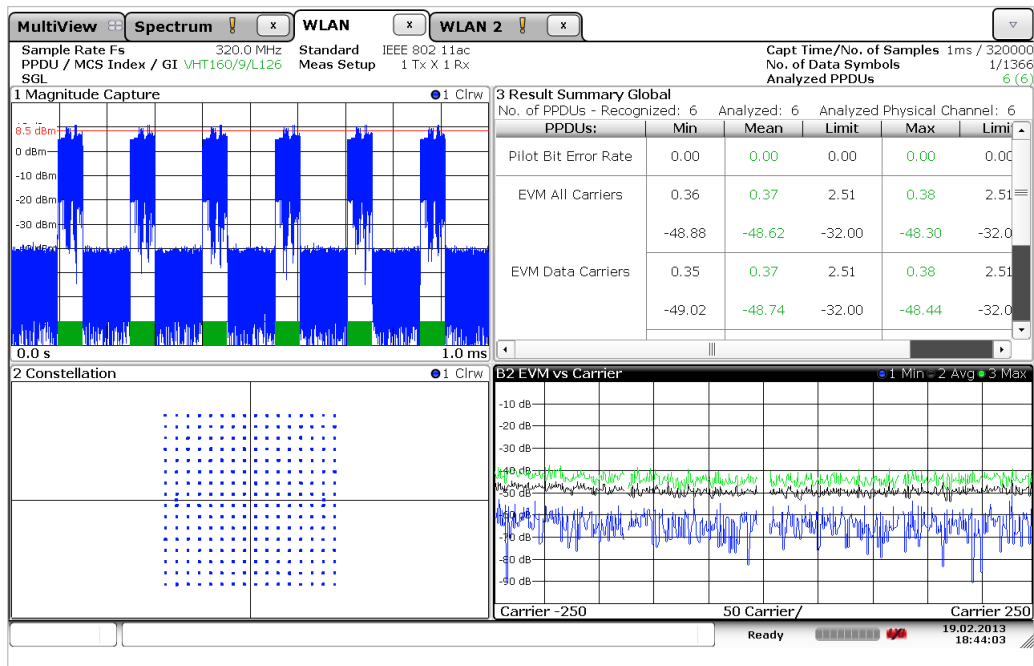

Measured EVM for an IEEE 802.11ac signal with 160 MHz bandwidth.

### Custom digital modulation (with R&S® SMW-B10 option, realtime mode)

Deviation error with 2FSK, 4FSK	deviation 0.2 to 0.7 × symbol rate	
	Gaussian filter with $B \times T = 0.2$ to $0.7$ , $f = 1$ GHz	
	symbol rate up to 2 MHz	0.25 % (meas.)
	symbol rate up to 10 MHz	0.75 % (meas.)
Phase error with MSK	Gaussian filter with $B \times T = 0.2$ to $0.7$ , $f = 1$ GHz	
	bit rate up to 2 MHz	0.15° (meas.)
	bit rate up to 10 MHz	0.3° (meas.)
EVM with QPSK, OQPSK, $\pi/4$ -DQPSK, 8PSK, 16QAM, 32QAM, 64QAM	cosine, root cosine filter with $\alpha = 0.2$ to $0.7$ , $f = 1$ GHz	
	symbol rate up to 5 MHz	0.2 % (meas.)
	symbol rate up to 20 MHz	0.7 % (meas.)

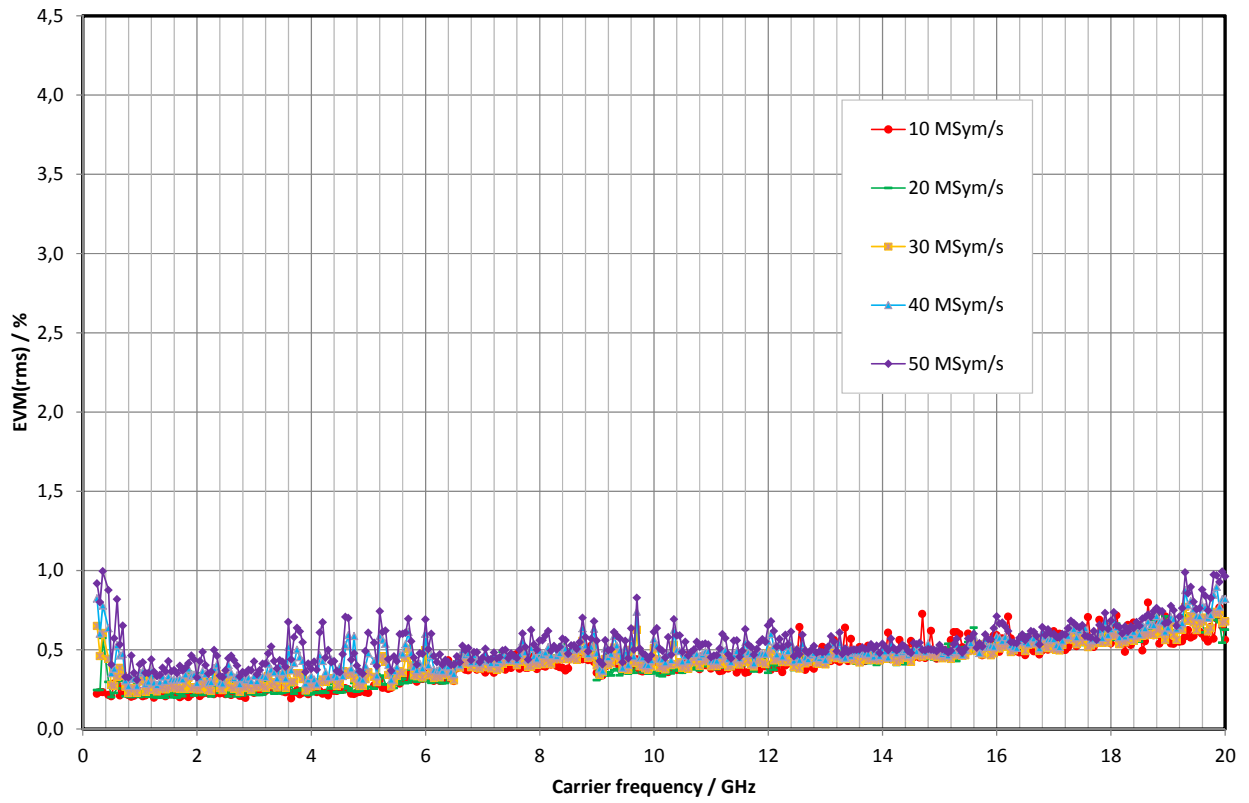

Measured EVM versus carrier frequency for 16QAM.

## Slow I/Q (R&S® SMW-K551 option)

At least one R&S® SMW-B10 option (I/Q baseband generator) and one R&S® SMW-K18 option (digital baseband output) must be installed.

In slow I/Q mode, the generated signal's clock rate can be reduced (e.g. a 20 MHz LTE signal is generated with a clock rate of 240 kHz instead of the original 30.72 MHz). This feature can be used to run tests on hardware emulation platforms that are not yet capable of full-speed signal processing. The signal and fading characteristics are comparable to those of a system running at full speed. The actual clock rate of the generated signal is controlled by the device connected to the digital I/Q output connectors of the R&S® SMW200A.

Note: All digital I/Q outputs need to run at the same clock rate.

Note: The minimum clock rate is limited by the external controlling device only (e.g. R&S® EX-IQ-Box).

Note: The R&S® SMW200A can handle varying clock rates.

Signal outputs		analog and digital, digital only
	with 2 × R&S® SMW-K18 installed	analog and digital, digital only, digital only multiplexed
Digital only	The instrument runs at reduced speed, depending on the device connected to the digital I/Q output (slow I/Q). The streams are output via the digital I/Q outputs only; analog I/Q outputs and RF outputs are not available. Note: System configurations with more than 4 streams are not available in this mode.	
Digital only multiplexed	The instrument runs at reduced speed, depending on the device connected to the digital I/Q output (slow I/Q). The streams are output via BBMM1 and BBMM2 in multiplexed mode, i.e. up to 4 streams are output via a single digital output. Analog I/Q outputs and RF outputs are not available. Note: All system configurations available on the instrument are available in this mode.	
Analog & Digital	The instrument runs in regular operating mode, both analog and digital outputs are available, slow I/Q is not possible.	
Number of digital outputs		according to selected system configuration (see section "Digital baseband inputs/outputs")
Number of streams per digital output	digital only	1
	digital only multiplexed	1 to 4
Bandwidth	general	according to selected system configuration (see section "Multichannel, MIMO, fading and noise", specifications for R&S® SMW-K74, -K76 options)
	4 streams mapped to one digital output	40 MHz

Note: In digital only/digital only multiplexed mode, marker signals are only available via the digital I/Q interface, but not via USER or T/M/C connectors.

Note: In digital only/digital only multiplexed mode, no digital baseband inputs are available.

## Digital modulation systems

At least one I/Q baseband generator (R&S®SMW-B10 option) must be installed. If two I/Q baseband generators are installed and two signals of the same standard (e.g. 3GPP FDD) are to be output simultaneously, two corresponding software options must also be installed (in this case R&S®SMW-K42). If only one R&S®SMW-K42 is installed and 3GPP is selected in one I/Q baseband generator, the other I/Q baseband generator is disabled for 3GPP. However, a software option is not tied to a specific I/Q baseband generator.

The specified data applies together with the parameters of the respective standard. The entire frequency range, the filter parameters and the symbol rates can be set by the user.

## Internal digital standards

The options are described in the Digital Standards data sheet (PD 5213.9434.22).

<b>Cellular standards</b>
EUTRA/LTE (R&S®SMW-K55 option)
EUTRA/LTE closed-loop BS test (R&S®SMW-K69 option, R&S®SMW-K55 required)
EUTRA/LTE log file generation (R&S®SMW-K81 option, R&S®SMW-K55 required)
EUTRA/LTE Release 9 and enhanced features (R&S®SMW-K84 option, R&S®SMW-K55 required)
EUTRA/LTE Release 10/LTE-Advanced (R&S®SMW-K85 option, R&S®SMW-K55 required)
LTE Release 11 and enhanced features (R&S®SMW-K112 option, R&S®SMW-K55 required)
3GPP FDD (R&S®SMW-K42 option)
3GPP FDD/HSPA/HSPA+, enhanced BS/MS tests (R&S®SMW-K83 option, R&S®SMW-K42 required)
GSM/EDGE (R&S®SMW-K40 option)
EDGE EVOLUTION (R&S®SMW-K41 option, R&S®SMW-K40 required)
CDMA2000® (R&S®SMW-K46 option)
1xEV-DO (R&S®SMW-K47 option)
1xEV-DO Rev. B (R&S®SMW-K87 option, R&S®SMW-K47 required)
TD-SCDMA (3GPP TDD LCR) (R&S®SMW-K50 option)
TD-SCDMA (3GPP TDD LCR) enhanced BS/MS test including HSDPA (R&S®SMW-K51 option, R&S®SMW-K50 required)
TETRA Release 2 (R&S®SMW-K68 option)
<b>Wireless connectivity standards</b>
IEEE 802.11 a/b/g/n/j/p (R&S®SMW-K54 option)
IEEE 802.11 ac (R&S®SMW-K86 option, R&S®SMW-K54 required)
IEEE 802.16 (R&S®SMW-K49 option)
Bluetooth® EDR/low energy (R&S®SMW-K60 option)
<b>Broadcast standards</b>
DVB-H/DVB-T (R&S®SMW-K52 option)
<b>Other standards and modulation systems</b>
Multicarrier CW signal generation (R&S®SMW-K61 option)
NFC A/B/F (R&S®SMW-K89 option)
Baseband power sweep (R&S®SMW-K542 option)

## Digital standards with R&S® WinIQSIM2™

R&S® WinIQSIM2™ requires an external PC.

The options are described in the R&S® WinIQSIM2™ data sheet (PD 5213.7460.22).

<b>Cellular standards</b>
EUTRA/LTE (R&S®SMW-K255 option)
EUTRA/LTE Release 9 and enhanced features (R&S®SMW-K284 option, R&S®SMW-K255 required)
EUTRA/LTE Release 10/LTE-Advanced (R&S®SMW-K285 option, R&S®SMW-K255 required)
LTE Release 11 and enhanced features (R&S®SMW-K412 option, R&S®SMW-K255 required)
3GPP FDD (R&S®SMW-K242 option)
3GPP FDD/HSPA/HSPA+, enhanced BS/MS tests (R&S®SMW-K283 option, R&S®SMW-K242 required)
GSM/EDGE (R&S®SMW-K240 option)
EDGE EVOLUTION (R&S®SMW-K241 option, R&S®SMW-K240 required)
CDMA2000® (R&S®SMW-K246 option)
1xEV-DO (R&S®SMW-K247 option)
1xEV-DO Rev. B (R&S®SMW-K287 option, R&S®SMW-K247 required)
TD-SCDMA (3GPP TDD LCR) (R&S®SMW-K250 option)
TD-SCDMA (3GPP TDD LCR) enhanced BS/MS test including HSDPA (R&S®SMW-K251 option, R&S®SMW-K250 required)
TETRA Release 2 (R&S®SMW-K268 option)
<b>Wireless connectivity standards</b>
IEEE 802.11 a/b/g/n (R&S®SMW-K254 option)
IEEE 802.11 ac (R&S®SMW-K286 option, R&S®SMW-K254 required)
IEEE 802.16 (R&S®SMW-K249 option)
Bluetooth® EDR/low energy (R&S®SMW-K260 option)
<b>Navigation standards</b>
GPS 1 satellite (R&S®SMW-K244 option)
Galileo 1 satellite (R&S®SMW-K266 option)
Glonass 1 satellite (R&S®SMW-K294 option)
Beidou 1 satellite (R&S®SMW-K407 option)
<b>Broadcast standards</b>
DVB-H/DVB-T (R&S®SMW-K252 option)
DAB/T-DMB (R&S®SMW-K253 option)
<b>Other standards and modulation systems</b>
Multicarrier CW signal generation (R&S®SMW-K261 option)
Additional white Gaussian noise (AWGN) (R&S®SMW-K262 option)
NFC A/B/F (R&S®SMW-K289 option)

## Options with external R&S® Pulse Sequencer software or R&S® Pulse Sequencer (DFS) software

The options are described in the pulse sequencer options data sheet (PD 3607.1388.22).

Pulse sequencing (R&S®SMW-K300 option)
Enhanced pulse sequencing (R&S®SMW-K301 option)
DFS signal generation (R&S®SMW-K350 option)

# Multichannel, MIMO, fading and noise

## Fading simulator (R&S<sup>®</sup> SMW-B14 option)

At least one R&S<sup>®</sup> SMW-B10 baseband generator must be installed.

All frequency and time settings are coupled to the internal reference frequency.

Number of installable fading simulator modules		1, 2 or 4
Number of available fading channels ("logical" faders)	one R&S <sup>®</sup> SMW-B14 installed	1
	two or four R&S <sup>®</sup> SMW-B14 installed	2
	with R&S <sup>®</sup> SMW-K74 option, two R&S <sup>®</sup> SMW-B14 installed	up to 4 (see R&S <sup>®</sup> SMW-K74 specifications)
	with R&S <sup>®</sup> SMW-K74 option, four R&S <sup>®</sup> SMW-B14 installed	up to 16 (see R&S <sup>®</sup> SMW-K74 specifications)
Number of fading paths (per logical fader)		20
Bandwidth		up to 160 MHz
Start seed		0 to 9
<b>Fading profiles</b>		static path, pure Doppler, Rayleigh, Rice, constant phase, bell shape TGn indoor, bell shape TGn moving vehicle
Fading profile parameter		
Rayleigh	pseudo-noise interval	> 1 year
Constant phase	phase	0° to 360°
	phase resolution	1°
Pure Doppler	maximum resulting Doppler shift	frequency ratio × current Doppler frequency
	frequency ratio	-1 to +1
	resolution	0.01
Rician	combination of Rayleigh and pure Doppler	
	power ratio	-30 dB to +30 dB
Fading path loss	setting range	0 dB to 50 dB
	resolution	0.01 dB
	accuracy	< 0.01 dB
Fading path delay	The 20 fading paths are divided in 4 path groups. Each group consists of 3 fine delay and 2 standard delay paths. A basic delay can be set per path group and an additional delay per path. The total delay per path is the sum of the basic delay of the respective group and of the additional delay of the path.	
Basic delay per group	group 1	0 s
	group 2, 3, 4	0 s to 0.5 s
	resolution	5 ns
Additional delay per path	fine delay path setting range	0 µs to 20 µs
	fine delay path resolution	2.5 ps
	standard delay path setting range	0 µs to 20 µs
	standard delay path resolution	5 ns
Speed range	at f = 1 GHz	0 km/h to 4320 km/h
	accuracy	< 0.1 %
Doppler frequency	setting range	0 Hz to 4000 Hz
	accuracy ( $f_D \geq 0.05$ Hz)	< 0.1 %
Restart	standard	auto, manual, external
Total insertion loss	automatic or user-definable, with clipping indicator	0 dB to 18 dB
Correlation	fading paths in signal path A pairwise with fading paths in signal path B	
	correlation coefficient	
	setting range	0 % to 100 %
	resolution	5 %
	correlation phase	
setting range	0° to 360°	
resolution	1°	
Lognormal	standard deviation	0 dB to 12 dB
	resolution	1 dB
	local constant at f = 1 GHz	20 m to 2000 m

Predefined settings	standard	LTE (CQI, EPA, EVA, ETU, MBFSN), GSM, CDMA2000 <sup>®</sup> , 1xEV-DO, IEEE 802.11 SISO, WiMAX <sup>™</sup> ITU, NADC, PCN, TETRA
	with R&S <sup>®</sup> SMW-K71 option	3GPP FDD WCDMA, LTE (HST, moving propagation)
	with R&S <sup>®</sup> SMW-K72 option	WiMAX <sup>™</sup> SUI, DAB, 3GPP TR 37.977 SCME channel models, C2C-CC channel models
	with R&S <sup>®</sup> SMW-K74 option	LTE MIMO (EPA, EVA, ETU), IEEE 802.11n MIMO, IEEE 802.11ac MIMO, WiMAX <sup>™</sup> MIMO
	with R&S <sup>®</sup> SMW-K74 and R&S <sup>®</sup> SMW-K71 option	LTE MIMO (HST)

## Dynamic fading (R&S<sup>®</sup>SMW-K71 option)

At least one R&S<sup>®</sup>SMW-B14 fading simulator must be installed. If two or more R&S<sup>®</sup>SMW-B14 are installed (signal paths A and B), dynamic fading functions can be used either on signal path A or B with one R&S<sup>®</sup>SMW-K71 option. For dynamic fading functions to be used on signal paths A and B simultaneously, two R&S<sup>®</sup>SMW-K71 must be installed.

<b>Moving delay mode</b>		
Number of fading paths		2 per signal path
Fading profiles		none
Basic delay	in steps of 5 ns	0 s to 0.5 s
Delay variation	peak to peak	0.3 µs to 40 µs
	variation period	10 s to 500 s
	variation speed	0 µs/s to 5 µs/s
Delay step size		5 ps
<b>Birth-death mode</b>		
System bandwidth		160 MHz
Number of fading paths		2 per signal path
Fading profiles		pure Doppler
Delay range		0 s to 40 µs
Delay grid		0 s to 20 µs <sup>9</sup>
Positions		3 to 50 <sup>9</sup>
Hopping dwell		100 ms to 5 s
Start offset	separately settable for each signal path	1 ms to 200 ms
Delay resolution		10 ns
<b>High-speed train</b>		
Fading profiles		static path, pure Doppler, Rayleigh
Speed	at f = 1 GHz	0 km/h to 4320 km/h
D (min)		1 m to 100 m
D (s)		20 m to 2000 m
<b>Two-channel interferer</b>		
Number of fading paths		2 per signal path
Fading profiles		static path, pure Doppler, Rayleigh
Fading profile parameter		
Rayleigh	pseudo-noise interval	> 1 year
	phase resolution	1°
Pure Doppler	maximum resulting Doppler shift	frequency ratio × current Doppler frequency
	frequency ratio	-1 to +1
	resolution	0.01
Fading path loss	setting range	0 dB to 50 dB
	resolution	0.01 dB
	accuracy	< 0.01 dB
Speed range	at f = 1 GHz	0 km/h to 4320 km/h
	accuracy	< 0.1 %
Min. delay	path 1	0 µs to 1638 µs
	path 2	0 µs to 999.9 µs
Max. delay	path 1	n.a.
	path 2	0.1 µs to 1000 µs

<sup>9</sup> The maximum delay range of 40 µs cannot be exceeded.



Moving mode	path 1	n.a.
	path 2	sliding, hopping
Period/dwell		0.1 s to 10 s

## Enhanced fading models (R&S<sup>®</sup>SMW-K72 option)

At least one R&S<sup>®</sup>SMW-B14 fading simulator must be installed. If two or more R&S<sup>®</sup>SMW-B14 are installed (signal paths A and B), extended statistic functions can be used either on signal path A or B with one R&S<sup>®</sup>SMW-K72 option. For extended statistic functions to be used on signal paths A and B simultaneously, two R&S<sup>®</sup>SMW-K72 must be installed.

Fading profiles		
Gauss I, Gauss II	sum of two Gaussian distributions	in line with DAB standard
Gauss DAB 1	Gaussian distribution, shifted in frequency	in line with DAB standard
Gauss Doppler	sum of Gaussian distribution and pure Doppler	
Gauss (0.08 fd)	Gaussian distribution, std. dev. 0.08 $f_d$	
Gauss (0.1 fd)	Gaussian distribution, std. dev. 0.1 $f_d$	
Gauss Watterson	sum of two Gaussian distributions	in line with Watterson channel model
WiMAX <sup>™</sup> Doppler	rounded Doppler PSD model	in line with IEEE 802.16a-03-01
WiMAX <sup>™</sup> Rice	same as WiMAX <sup>™</sup> Doppler plus pure Doppler	in line with IEEE 802.16a-03-01
Customized fading profiles		
Modified Rayleigh	spectrum shape can be modified within the maximum Doppler frequency range	customizable bandwidth, frequency offset, lower cutoff frequency, upper cutoff frequency
Modified flat		
Predefined settings	SUI1 to SUI6	in line with IEEE 802.16a-03-01
	ITU OIP-A, ITU OIP-B, ITU V-A	in line with 3GPP TS34.121-1, annex D.2.2, table D.2.2.1A
	DAB-RA, DAB-TU, DAB-SFN	in line with EN 50248-2001
	Watterson I1, Watterson I2, Watterson I3	in line with "Experimental Confirmation of an HF Channel Model", Watterson, et al., IEEE Transactions on communication technology, vol. com-18, no. 6, Dec 1970"
	Rural LOS, Urban Approaching LOS, Urban Crossing LOS, Highway LOS, Highway NLOS	in line with C2C-CC channel models for 802.11p
	with R&S <sup>®</sup> SMW-K74 option: SCME Uma3, SCME Uma30, SCME Umi3, SCME Umi30	in line with 3GPP TR 37.977

## MIMO fading/routing (R&S<sup>®</sup>SMW-K74 option)

The R&S<sup>®</sup>SMW-K74 option allows up to 16 fading channels to be simulated as is required for 4x4 MIMO receiver tests. At least two R&S<sup>®</sup>SMW-B14 options must be installed (signal paths A and B), and two baseband sources (R&S<sup>®</sup>SMW-B10) and the R&S<sup>®</sup>SMW-B13T option must be present.

### Supported scenarios with two R&S<sup>®</sup>SMW-B14 options

Cells with gray background: up to 160 MHz bandwidth supported for this scenario

Cells with white background: up to 80 MHz bandwidth supported for this scenario

Entities (users, cells, carriers)	TX antennas	RX antennas	1	2
1	1		•	•
	2		•	•
2	1		•	•
	2		–	–

**Supported scenarios with four R&S®SMW-B14 options**

Cells with gray background: up to 160 MHz bandwidth supported for this scenario

Cells with white background: up to 80 MHz bandwidth supported for this scenario

Entities (users, cells, carriers)	TX antennas	RX antennas	1	2	3	4	8
1	1		•	•	•	•	•
	2		•	•	•	•	•
	3		•	•	•	•	–
	4		•	•	•	•	–
	8		•	•	–	–	–
2	1		•	•	–	–	–
	2		•	•	–	–	–
	3		–	–	–	–	–
	4		–	–	–	–	–
	8		–	–	–	–	–

Parameters common to all scenarios		
Number of fading paths per fading channel		20 paths, see R&S®SMW-B14
Steering matrix	can be set by setting the diagonal elements of the correlation matrix	
Correlation	Correlation between corresponding fading paths of all TX/RX signal paths can be set in a correlation matrix. For each fading path index, an individual matrix can be set.	
	correlation coefficient	
	setting range	0 % to 100 %
	resolution	1 %
	correlation phase	
	setting range	0° to 360°
	resolution	1°
Correlation matrix setting		individually or with Kronecker assumption (RX and TX antenna correlation with automatic calculation of matrix) or by AoA/AoD parameterization
	with R&S®SMW-K72 option	SCME/WINNER
Matrix representation		(real, imaginary) or (magnitude, phase)
Additional SCME/WINNER parameters		
Number of clusters		up to 20
Number of subclusters		up to 3 per cluster

## Multiple entities (R&S® SMW-K76 option)

Two R&S® SMW-B10 options and the R&S® SMW-B13T option must be installed.

The R&S® SMW-K76 option allows the generation of scenarios with up to 8 baseband signals. Common applications are multistandard radio with 8 SISO systems (8x1x1) or LTE carrier aggregation with each carrier using a 2x2 MIMO system (4x2x2) within one box.

For scenarios with more than 4 baseband signals, only the "coupled sources" baseband configuration is available, i.e. all generated baseband signals belong to the same digital standard. "Coupled sources" is supported by the LTE (R&S® SMW-K55 option and enhancement options) and WLAN (R&S® SMW-K54/-K86 options) digital standards and by the arbitrary waveform mode of the I/Q baseband generator (R&S® SMW-B10 option). Please note that not all scenarios are supported by all digital standards.

Note: If the R&S® SMW200A is equipped with one fading simulator module (R&S® SMW-B14 option), the functionality of the R&S® SMW-K76 is limited to the generation of 2 baseband signals only. Therefore, we strongly recommend that you install the R&S® SMW-K76 option only on instruments with either 0 or 2 or 4 R&S® SMW-B14 options.

### Supported scenarios with R&S® SMW-K76

Cells with gray background: up to 160 MHz bandwidth supported for this scenario (depending on installed R&S® SMW-K522 bandwidth extension options)

Cells with white background: up to 80 MHz bandwidth supported for this scenario

Entities (users, cells, carriers)	TX antennas	RX antennas	1
3	1	1	•
4	1	1	•
5	1	1	•
6	1	1	•
7	1	1	•
8	1	1	•

### Additional supported scenarios with R&S® SMW-K76 in combination with an R&S® SMW-K74 option and four R&S® SMW-B14 options

Cells with gray background: up to 160 MHz bandwidth supported for this scenario (depending on installed R&S® SMW-K522 bandwidth extension options)

Cells with white background: up to 80 MHz bandwidth supported for this scenario

Entities (users, cells, carriers)	TX antennas	RX antennas	1	2
3	1	1	•	•
	2	1	•	•
4	1	1	•	•
	2	1	•	•

### Fading capabilities in R&S® SMW-K76 scenarios

Individual fading can be applied to each entity depending on the available fading options:

4 × R&S® SMW-B14	individual fading can be applied to all entities for system configurations 3x1x1 to 8x1x1 (SISO only)
4 × R&S® SMW-B14 + R&S® SMW-K74	individual fading can be applied to all entities (MIMO and SISO)
Other configurations	no fading can be applied to R&S® SMW-K76 scenarios

## Additive white Gaussian noise (AWGN) (R&S® SMW-K62 option)

AWGN can be generated either on path A or B with one R&S® SMW-K62 option. For AWGN to be generated on paths A and B simultaneously, two R&S® SMW-K62 must be installed, and the R&S® SMW200A must be equipped with the R&S® SMW-B13T option.

Addition of an AWGN signal of settable bandwidth and settable C/N ratio or  $E_b/N_0$  to a wanted signal. If the noise generator is used, a frequency offset cannot be added to the wanted signal.

Noise		
Distribution density		Gaussian, statistical, separate for I and Q
Crest factor		> 15 dB
Periodicity		> $(2^{800} - 1) / 200$ MHz
C/N, $E_b/N_0$		
Setting range	Depending on the set RF level. The PEP of the sum signal (wanted signal + noise) must not exceed the maximum possible PEP of the respective RF path.	-50 dB to +45 dB
Setting resolution		0.1 dB
Uncertainty	for system bandwidth = symbol rate, symbol rate < 4 MHz, -24 dB < C/N < 30 dB and crest factor < 12 dB	< 0.1 dB
System bandwidth		
Setting range		1 kHz to 160 MHz
Setting resolution		100 Hz

## Remote control

Interfaces	remote control	IEC 60625 (GPIB IEEE-488.2)
	Ethernet/LAN	10/100BaseT
	USB	2.0 (high speed)
	serial	RS-232 <sup>10</sup>
Command set		SCPI 1999.5 or compatible command sets
IEC/IEEE bus address		0 to 30
Ethernet/LAN protocols and services		<ul style="list-style-type: none"> <li>• VISA VXI-11 (remote control)</li> <li>• Telnet/RawEthernet (remote control)</li> <li>• VNC (remote operation with web browser)</li> <li>• FTP (file transfer protocol)</li> <li>• SMB (mapping parts of the instrument to a host file system)</li> </ul>
Ethernet/LAN addressing		DHCP, static, support of ZeroConf and M-DNS to facilitate direct connection to a system controller
USB protocol		VISA USB-TMC

---

<sup>10</sup> Requires the R&S®TS-USB1 serial adapter (recommended extra).

# Connectors

## Front panel connectors

The following connectors are located on the front panel of the instrument.

RF 50 $\Omega$ (path A)	RF output path A	
	R&S <sup>®</sup> SMW-B103, R&S <sup>®</sup> SMW-B106	N female
	R&S <sup>®</sup> SMW-B112, R&S <sup>®</sup> SMW-B120, R&S <sup>®</sup> SMW-B131, R&S <sup>®</sup> SMW-B140	test port adapter, PC 2.92 mm female (interchangeable port connector system)
RF 50 $\Omega$ (path B)	RF output path B	
	R&S <sup>®</sup> SMW-B203, R&S <sup>®</sup> SMW-B206	N female
	R&S <sup>®</sup> SMW-B212, R&S <sup>®</sup> SMW-B220	test port adapter, PC 2.92 mm female (interchangeable port connector system)
I (path A)	I modulation input signal, path A	BNC female
Q (path A)	Q modulation input signal, path A	BNC female
I (path B)	I modulation input signal, path B	BNC female
Q (path B)	Q modulation input signal, path B	BNC female
USER 1, USER 2, USER 3	user-configurable inputs or outputs, e.g. as trigger input or marker output	BNC female
SENSOR	connector for R&S <sup>®</sup> NRP-Zxx power sensor	6-pin ODU MINI-SNAP <sup>®</sup> series B
USB	USB 2.0 connector for external USB devices such as mouse, keyboard, R&S <sup>®</sup> NRP-Zxx power sensors (with R&S <sup>®</sup> NRP-Z4 adapter cable), memory stick for software update and data exchange, or USB serial adapter for RS-232 remote control	USB type A

## Rear panel connectors

REF IN	reference frequency input	BNC female
REF OUT	reference frequency output	BNC female
INST TRG A	trigger input for RF path A, e.g. for frequency or level sweep	BNC female
INST TRG B	trigger input for RF path B, e.g. for frequency or level sweep	BNC female
USER 4, USER 5, USER 6	user-configurable inputs or outputs, e.g. as trigger input or marker output	BNC female
EFC	input for electronic tuning of internal reference frequency	BNC female
LO IN	phase-coherent LO input	SMA female
LO OUT	phase-coherent LO output	SMA female
IEEE 488	remote control of instrument via GPIB	24-pin Amphenol series 57 female
DISPLAY PORT	for future use	
DVI	for future use	
LAN	provides remote control functionality and other services, see section "Remote control"	RJ-45
USB IN	USB 2.0 (high speed) remote control of instrument (USB-TMC)	USB type B
USB DEVICE	USB 2.0 (high speed) connector for external USB devices such as mouse and keyboard for enhanced operation, R&S <sup>®</sup> NRP-Zxx power sensors (with R&S <sup>®</sup> NRP-Z4 adapter cable) for external power measurements and level adjustment of instrument, memory stick for software update and data exchange, USB serial adapter for RS-232 remote control	USB type A
LAN	provides remote control functionality and other services, see section "Remote control"	RJ-45

IEEE 488	remote control of instrument via GPIB	24-pin Amphenol series 57 female
EXT 1, EXT 2	inputs for external analog modulation signals	BNC female
DIG I/Q OUT 1, DIG I/Q OUT 2	digital output connectivity in line with R&S® Digital I/Q Interface to connect to the R&S® EX-IQ-Box, for example	26-pin MDR
<b>Analog I/Q outputs</b>		
I/LF OUT 1	analog I output alternative function: LF generator output	BNC female
I-bar 1	analog I-bar output	BNC female
Q/LF OUT 2	analog Q output alternative function: LF generator output	BNC female
Q-bar 1	analog Q-bar output	BNC female
I, I-bar, Q, Q-bar	second set of analog I, I-bar, Q, Q-bar outputs	BNC female
<b>Connectors on baseband generator and fading simulator modules</b>		
T/M/C 1, T/M/C 4	multipurpose input/output connectors; configurable as trigger input, marker output or clock input or output	BNC female
T/M 2, T/M 3, T/M 5, T/M 6	multipurpose input/output connectors; configurable as trigger input or marker output	BNC female
DIG IQ IN/OUT 1, DIG IQ IN/OUT 2	digital input or output connectivity in line with R&S® Digital I/Q Interface	26-pin MDR

## General data

<b>Power supply</b>		
AC input voltage range		100 V to 240 V
AC input current range		max. 7.3 A to 4.6 A
AC supply frequency		50 Hz to 60 Hz, 400 Hz
Power consumption	when fully equipped	550 W (meas.)
<b>Environmental conditions</b>		
Temperature range	operating	5 °C to +45 °C
	storage	-40 °C to +60 °C temperature gradient < 5 K/hour
Climatic resistance		+40 °C/90 % rel. humidity, cyclically in line with EN 60068-2-30
Altitude	operating	4600 m
<b>Mechanical resistance</b>		
Vibration	sinusoidal	5 Hz to 55 Hz, 0.15 mm amplitude const., 55 Hz to 150 Hz, 0.5 g const., in line with EN 60068-2-6
	random	10 Hz to 300 Hz, acceleration 1.2 g RMS, in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810E, method no. 516.4, procedure I
<b>Product conformity</b>		
EMC	in line with EMC directive of EU (2004/108/EC)	applied harmonized standards: EN 61326-1 (for use in industrial environment), EN 61326-2-1, EN 55011 (class B), EN 61000-3-2, EN 61000-3-3
Electrical safety	in line with low voltage directive of EU (2006/95/EC)	applied harmonized standard: EN 61010-1
	USA	UL 61010-1
	Canada	CAN/CSA-C22.2 No. 61010-1
International certification	VDE – Association for Electrical, Electronic and Information Technologies	GS mark 40036426
	CSA – Canadian Standard Association	cCSA <sub>UL</sub> mark 2571181
<b>Dimensions and weight</b>		
Dimensions (W × H × D)		435 mm × 192 mm × 460 mm (17.1 in × 7.6 in × 18.1 in)
Weight	when fully equipped	21 kg (46.3 lb)
<b>Calibration interval</b>		
Recommended calibration interval	operation 40 h/week in full range of specified environmental conditions	3 years

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Rohde & Schwarz is under license.

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA-USA).

WiMAX Forum is a registered trademark of the WiMAX Forum. WiMAX, the WiMAX Forum logo, WiMAX Forum Certified and the WiMAX Forum Certified logo are trademarks of the WiMAX Forum.



## Ordering information

R&S®SMW-Bxxx = hardware option

R&S®SMW-Kxxx = software/key code option

Designation	Type	Order No.
<b>Vector Signal Generator</b> <sup>11</sup> including power cable, quick start guide and CD-ROM (with operating and service manual)	R&S®SMW200A	1412.0000.02
<b>Options</b>		
Frequency Options, RF path A		
100 kHz to 3 GHz	R&S®SMW-B103	1413.0004.02
100 kHz to 6 GHz	R&S®SMW-B106	1413.0104.02
100 kHz to 12.75 GHz	R&S®SMW-B112	1413.0204.03
100 kHz to 20 GHz	R&S®SMW-B120	1413.0404.02
100 kHz to 31.8 GHz	R&S®SMW-B131	1413.8605.02
100 kHz to 40 GHz	R&S®SMW-B140	1413.0604.02
Baseband main modules		
Signal Routing and Baseband Main Module, one I/Q path to RF	R&S®SMW-B13	1413.2807.02
Signal Routing and Baseband Main Module, two I/Q paths to RF	R&S®SMW-B13T	1413.3003.02
Frequency Options, RF path B		
100 kHz to 3 GHz	R&S®SMW-B203	1413.0804.02
100 kHz to 6 GHz	R&S®SMW-B206	1413.0904.02
100 kHz to 12.75 GHz	R&S®SMW-B212	1413.1000.03
100 kHz to 20 GHz	R&S®SMW-B220	1413.1100.02
Other RF options		
FM/φM Modulator	R&S®SMW-B20	1413.1600.02
Enhanced Phase Noise Performance and FM/φM Modulator	R&S®SMW-B22	1413.2207.02
Phase Coherence	R&S®SMW-B90	1413.5841.02
Pulse Modulator	R&S®SMW-K22	1413.3249.02
Pulse Generator	R&S®SMW-K23	1413.3284.02
Multifunction Generator	R&S®SMW-K24	1413.3332.02
Differential Analog I/Q Inputs	R&S®SMW-K739	1413.7167.02
Baseband		
Baseband Generator with ARB (64 Msample) and Digital Modulation (realtime), 120 MHz RF bandwidth	R&S®SMW-B10	1413.1200.02
Differential Analog I/Q Outputs	R&S®SMW-K16	1413.3384.02
Digital Baseband Output	R&S®SMW-K18	1413.3432.02
ARB Memory Extension to 512 Msample	R&S®SMW-K511	1413.6860.02
ARB Memory Extension to 1 Gsample	R&S®SMW-K512	1413.6919.02
Baseband Extension to 160 MHz RF bandwidth	R&S®SMW-K522	1413.6960.02
Envelope Tracking	R&S®SMW-K540	1413.7215.02
AM/AM, AM/φM Predistortion	R&S®SMW-K541	1413.7267.02
Slow I/Q	R&S®SMW-K551	1413.9724.02
Multichannel, MIMO, fading and noise		
Fading Simulator	R&S®SMW-B14	1413.1500.02
Additive White Gaussian Noise (AWGN)	R&S®SMW-K62	1413.3484.02
Dynamic Fading	R&S®SMW-K71	1413.3532.02
Enhanced Fading Models	R&S®SMW-K72	1413.3584.02
MIMO Fading/Routing	R&S®SMW-K74	1413.3632.02
Multiple Entities	R&S®SMW-K76	1413.9624.02

<sup>11</sup> The base unit can only be ordered with an R&S®SMW-B1xx frequency option and an R&S®SMW-B13 or R&S®SMW-B13T signal routing and baseband main module.

Designation	Type	Order No.
<b>Digital standards</b>		
GSM/EDGE	R&S®SMW-K40	1413.3684.02
EDGE Evolution	R&S®SMW-K41	1413.3732.02
3GPP FDD	R&S®SMW-K42	1413.3784.02
CDMA2000®	R&S®SMW-K46	1413.3884.02
1xEV-DO	R&S®SMW-K47	1413.3932.02
IEEE 802.16	R&S®SMW-K49	1413.3984.02
TD-SCDMA	R&S®SMW-K50	1413.4039.02
TD-SCDMA Enhanced BS/MS Tests	R&S®SMW-K51	1413.4080.02
DVB-H/DVB-T	R&S®SMW-K52	1413.6090.02
IEEE 802.11 (a/b/g/n)	R&S®SMW-K54	1413.4139.02
EUTRA/LTE	R&S®SMW-K55	1413.4180.02
Bluetooth® EDR	R&S®SMW-K60	1413.4239.02
Multicarrier CW Signal Generation	R&S®SMW-K61	1413.4280.02
TETRA Release 2	R&S®SMW-K68	1413.4439.02
LTE Closed-Loop BS Test	R&S®SMW-K69	1413.4480.02
LTE Log File Generation	R&S®SMW-K81	1413.4539.02
3GPP FDD HSPA/HSPA+, Enhanced BS/MS Tests	R&S®SMW-K83	1413.4580.02
EUTRA/LTE Release 9 and Enhanced Features	R&S®SMW-K84	1413.5435.02
EUTRA/LTE Release 10 (LTE-Advanced)	R&S®SMW-K85	1413.5487.02
IEEE 802.11ac	R&S®SMW-K86	1413.5635.02
1xEV-DO Rev. B	R&S®SMW-K87	1413.6519.02
NFC A/B/F	R&S®SMW-K89	1413.6619.02
LTE Release 11 and Enhanced Features	R&S®SMW-K112	1413.8505.02
Baseband Power Sweep	R&S®SMW-K542	1413.9876.02
<b>Digital standards using R&amp;S®WinIQSIM2™<sup>12</sup></b>		
GSM/EDGE	R&S®SMW-K240	1413.4739.02
EDGE Evolution	R&S®SMW-K241	1413.4780.02
3GPP FDD	R&S®SMW-K242	1413.4839.02
GPS 1 Satellite	R&S®SMW-K244	1413.4880.02
CDMA2000®	R&S®SMW-K246	1413.4939.02
1xEV-DO	R&S®SMW-K247	1413.4980.02
IEEE 802.16	R&S®SMW-K249	1413.5035.02
TD-SCDMA	R&S®SMW-K250	1413.5087.02
TD-SCDMA Enhanced BS/MS Tests	R&S®SMW-K251	1413.5135.02
DVB-H/DVB-T	R&S®SMW-K252	1413.6190.02
DAB/T-DMB	R&S®SMW-K253	1413.6248.02
IEEE 802.11n	R&S®SMW-K254	1413.5187.02
EUTRA/LTE	R&S®SMW-K255	1413.5235.02
Bluetooth® EDR	R&S®SMW-K260	1413.5287.02
Multicarrier CW Signal Generation	R&S®SMW-K261	1413.5335.02
Additive White Gaussian Noise (AWGN)	R&S®SMW-K262	1413.6460.02
Galileo 1 Satellite	R&S®SMW-K266	1413.7015.02
TETRA Release 2	R&S®SMW-K268	1413.5387.02
3GPP FDD HSPA/HSPA+, Enhanced BS/MS Tests	R&S®SMW-K283	1413.6290.02
EUTRA/LTE Release 9 and Enhanced Features	R&S®SMW-K284	1413.5535.02
EUTRA/LTE Release 10 (LTE-Advanced)	R&S®SMW-K285	1413.5587.02
IEEE 802.11ac	R&S®SMW-K286	1413.5687.02
1xEV-DO Rev. B	R&S®SMW-K287	1413.6560.02
NFC A/B/F	R&S®SMW-K289	1413.6654.02
Glonass 1 Satellite	R&S®SMW-K294	1413.7067.02
Beidou 1 Satellite	R&S®SMW-K407	1413.7115.02
LTE Release 11 and Enhanced Features	R&S®SMW-K412	1413.8557.02
<b>Options with external R&amp;S®Pulse Sequencer software or R&amp;S®Pulse Sequencer (DFS) software</b>		
Pulse Sequencing	R&S®SMW-K300	1413.8805.02
Enhanced Pulse Sequencing	R&S®SMW-K301	1413.9776.02
DFS Signal Generation	R&S®SMW-K350	1413.9160.02
<b>Other options</b>		
Rear Panel Connectors for RF path A and I/Q	R&S®SMW-B81	1413.5893.02
Rear Panel Connectors for RF path B	R&S®SMW-B82	1413.5941.02

<sup>12</sup> R&S®WinIQSIM2™ requires an external PC.

Designation	Type	Order No.
<b>Recommended extras</b>		
19" Rack Adapter	R&S®ZZA-KN4	1175.3033.00
Cable for connecting Rohde & Schwarz digital baseband interfaces	R&S®SMU-Z6	1415.0201.02
USB Serial Adapter for RS-232 remote control	R&S®TS-USB1	6124.2531.00
Adapters for instruments with an R&S®SMW-B112/-B212/-B120/-B220/-B131/-B140 frequency option		
Test Port Adapter, 2.92 mm female		1036.4790.00
Test Port Adapter, 2.92 mm male		1036.4802.00
Test Port Adapter, N female		1036.4777.00
Test Port Adapter, N male		1036.4783.00
<b>Documentation</b>		
Documentation of Calibration Values	R&S®DCV-2	0240.2193.18
R&S®SMW200A DAkKS Calibration (ISO 17025, ISO 9000)	R&S®SMW200ADKD	1413.6690.02

<b>Service options</b>		
Extended Warranty, one year	R&S®WE1	Please contact your local Rohde & Schwarz sales office.
Extended Warranty, two years	R&S®WE2	
Extended Warranty, three years	R&S®WE3	
Extended Warranty, four years	R&S®WE4	
Extended Warranty with Calibration Coverage, one year	R&S®CW1	
Extended Warranty with Calibration Coverage, two years	R&S®CW2	
Extended Warranty with Calibration Coverage, three years	R&S®CW3	
Extended Warranty with Calibration Coverage, four years	R&S®CW4	

#### Extended warranty with a term of one to four years (WE1 to WE4)

Repairs carried out during the contract term are free of charge<sup>13</sup>. Necessary calibration and adjustments carried out during repairs are also covered. Simply contact the forwarding agent we name; your product will be picked up free of charge and returned to you in top condition a couple of days later.

#### Extended warranty with calibration (CW1 to CW4)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs<sup>13</sup> and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

For product brochure, see PD 3606.8037.12 and [www.rohde-schwarz.com/product/smw200a](http://www.rohde-schwarz.com/product/smw200a)

<sup>13</sup> Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.

## Service that adds value

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

## About Rohde & Schwarz

The Rohde & Schwarz electronics group is a leading supplier of solutions in the fields of test and measurement, broadcast and media, secure communications, cyber-security, and radiomonitoring and radiolocation. Founded more than 80 years ago, this independent global company has an extensive sales network and is present in more than 70 countries. The company is headquartered in Munich, Germany.

## Sustainable product design

- | Environmental compatibility and eco-footprint
- | Energy efficiency and low emissions
- | Longevity and optimized total cost of ownership

Certified Quality Management

ISO 9001

Certified Environmental Management

ISO 14001

## Rohde & Schwarz GmbH & Co. KG

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

## Regional contact

- | Europe, Africa, Middle East | +49 89 4129 12345  
[customersupport@rohde-schwarz.com](mailto:customersupport@rohde-schwarz.com)
- | North America | 1 888 TEST RSA (1 888 837 87 72)  
[customer.support@rsa.rohde-schwarz.com](mailto:customer.support@rsa.rohde-schwarz.com)
- | Latin America | +1 410 910 79 88  
[customersupport.la@rohde-schwarz.com](mailto:customersupport.la@rohde-schwarz.com)
- | Asia Pacific | +65 65 13 04 88  
[customersupport.asia@rohde-schwarz.com](mailto:customersupport.asia@rohde-schwarz.com)
- | China | +86 800 810 82 28 | +86 400 650 58 96  
[customersupport.china@rohde-schwarz.com](mailto:customersupport.china@rohde-schwarz.com)

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners

PD 3606.8037.22 | Version 03.02 | March 2015 (ch)

R&S®SMW200A Vector Signal Generator

Data without tolerance limits is not binding | Subject to change

© 2013 - 2015 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



3606803722