


Bulk Current Injection Probe



The F-120-9 has been designed to extend the use of conducted immunity testing over the bandwidth of 10 kHz – 230 MHz. The useable frequency range is 10 kHz - 230 MHz with an insertion loss of less than 10 dB between 120 kHz – 230 MHz. The input power rating is 100 watts for 30 minutes.

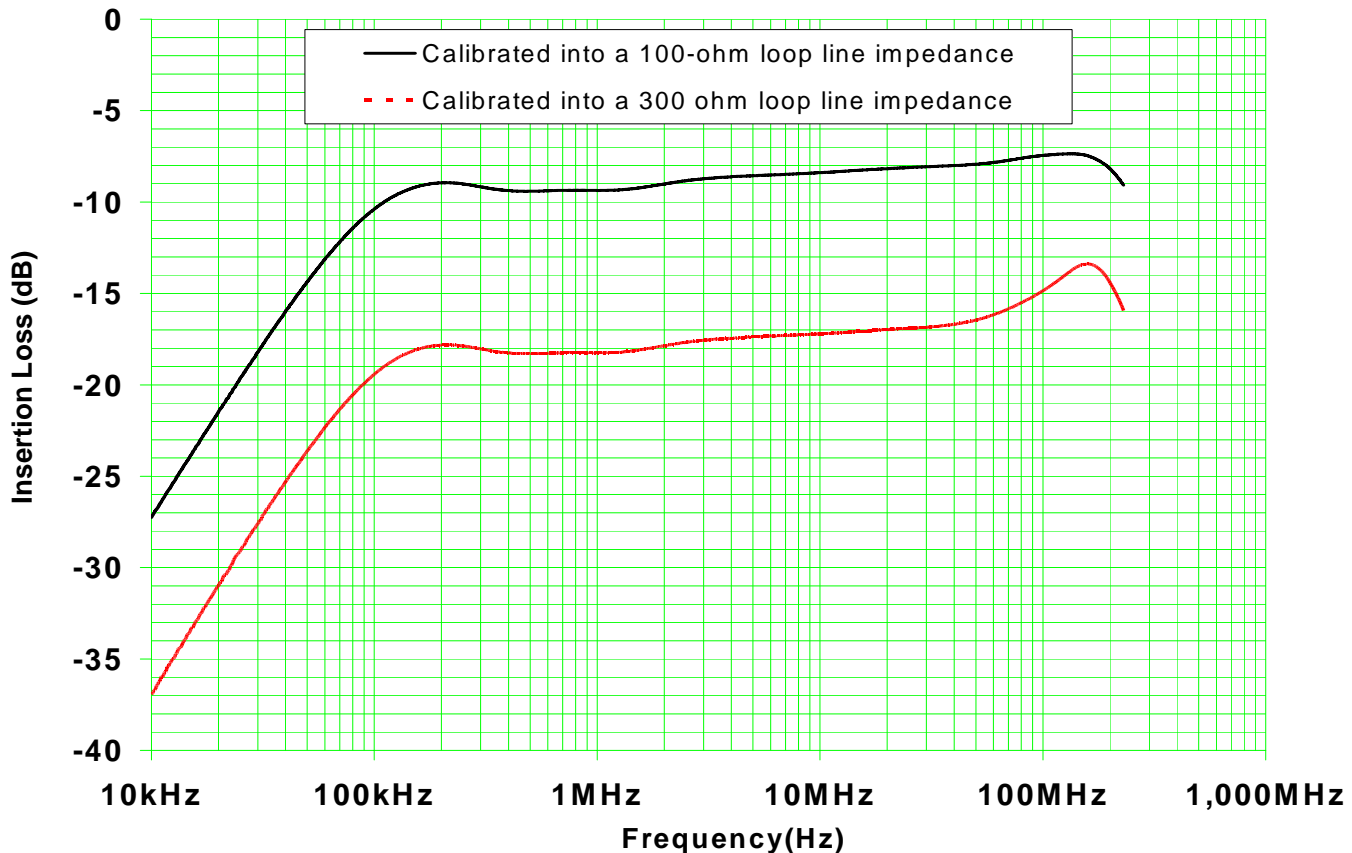

F-120-9 Specifications

Frequency: 10 kHz – 230 MHz
Inner Diameter: 40mm
Outer diameter: 127mm
Height: 70mm
Input Power rating: 100 watts

Accessories

Calibration Fixture: FCC-BCICF-1
Bandwidth: 10 kHz – 400 MHz
Current Probe: F-52
Bandwidth: 10 kHz – 400 MHz



Fischer Custom Communications, Inc.

20603 Earl St., Torrance, CA 90503 · Phone: 310-303-3300 Fax 310-371-6268 · email: Sales@fischercc.com