




PQ SERIES

DC POWER SUPPLIES



-  3.3 KW
-  6.6 KW
-  10 KW

MAGNA-POWER
ELECTRONICS, INC.

PQ SERIES

RUGGED MFL TECHNOLOGY

3.3 KW, 6.6 KW, 10 KW DC POWER SUPPLIES

MODELS AND RATINGS

MODEL	VOLTS Vdc	AMPS Adc	RIPPLE mVrms	POWER kW
PQ5-600	0-5	0-600	40	3.3
PQ8-400	0-8	0-400	40	
PQ10-300	0-10	0-300	40	
PQ16-200	0-16	0-200	40	
PQ20-165	0-20	0-165	35	
PQ32-100	0-32	0-100	30	
PQ40-82	0-40	0-82	35	
PQ50-65	0-50	0-65	40	
PQ80-41	0-80	0-41	50	
PQ100-33	0-100	0-33	55	
PQ125-26	0-125	0-26	60	
PQ160-20	0-160	0-20	70	
PQ200-16	0-200	0-16	80	
PQ250-13	0-250	0-13	90	
PQ375-8	0-375	0-8	100	
PQ500-6	0-500	0-6	130	
PQ600-5	0-600	0-5	150	
PQ8-800	0-8	0-800	40	6.6
PQ10-600	0-10	0-600	40	
PQ16-400	0-16	0-400	40	
PQ20-330	0-20	0-330	35	
PQ32-200	0-32	0-200	30	
PQ40-165	0-40	0-165	35	
PQ50-130	0-50	0-130	40	
PQ80-82	0-80	0-82	50	
PQ100-66	0-100	0-66	55	
PQ125-53	0-125	0-53	60	
PQ160-41	0-160	0-41	70	
PQ200-33	0-200	0-33	80	
PQ250-26	0-250	0-26	90	
PQ375-17	0-375	0-17	100	
PQ500-13	0-500	0-13	130	
PQ600-10	0-600	0-10	150	
PQ10-900	0-10	0-900	40	10
PQ16-600	0-16	0-600	40	
PQ20-500	0-20	0-500	35	
PQ32-300	0-32	0-300	30	
PQ40-250	0-40	0-250	35	
PQ50-200	0-50	0-200	40	
PQ80-125	0-80	0-125	50	
PQ100-100	0-100	0-100	55	
PQ125-80	0-125	0-80	60	
PQ160-62	0-160	0-62	70	
PQ200-50	0-200	0-50	80	
PQ250-40	0-250	0-40	90	
PQ375-27	0-375	0-27	100	
PQ500-20	0-500	0-20	130	
PQ600-16	0-600	0-16	150	

FEATURES

- 48 Models: 5 to 600 Vdc, 5 to 900 Adc
- Series and parallel master/slave operation
- High dielectric withstand: 2500 Vac
- Digital control lines optically isolated
- Exclusive control loop diagnostics
- OVP and OCP shutdown standard, SCR crowbar optional
- Automatic V/I crossover
- Digital meters standard
- Optional IEEE-488 and RS232 programming
- Air exhaust in rear of cabinet
- User friendly controls and indicators
- High power factor
- CE Mark



SPECIFICATIONS:

Input voltage: 208/240 Vac, 50-60 Hz, 3-phase; 380/415 Vac, 50-60 Hz, 3-phase; 440/480 Vac, 50-60 Hz, 3-phase; 240 Vac, 50-60 Hz, 1-phase, 3.3 kW only

Regulation line and load combined: 0.10%

Stability: 0.10% for 8 hours after 30 minute warm up

Transient response: 10 ms to recover within 2% of regulated output with a 30% step load change

Ambient Temperature: 0 to 50°C

Programming resistors: 1K full scale for output voltage, output current, over voltage, and over current shutdown

Temperature coefficient: 0.04%/°C of maximum output current

Size: 5 1/2" H x 19" W x 24" D

Weight: 125 lbs for 10 kW models, 97 lbs for 6.6 kW models, and 74 lbs for 3.3 kW models

NOTES:

1. Specifications subject to change without notice.
2. Specify optional EMI filter to meet EMC requirements.
3. Other options consult factory.

OPTIONS

SCR Crowbar
Custom input voltage
Custom output voltage

EMI Filter
IEEE-488 Interface



MAGNA-POWER
ELECTRONICS, INC.

81 Fulton Street, Boonton, NJ 07005
(973) 263-0017 FAX: (973) 263-1928
E-mail: sales@magna-power.com
<http://www.magna-power.com>

PQ SERIES

COST AND PERFORMANCE

A NEW STANDARD IN POWER PROCESSING

Magna-Power Electronics' **PQ SERIES** sets a new standard for high-powered dc supplies. A combination of high and medium frequency power processing technologies improves response, shrinks package size, and reduces cost. **PQ SERIES** power supplies are current fed. Compared with conventional switching power supplies, these supplies can easily tolerate the punishment of the most rigorous applications.

PQ SERIES power supplies are fully programmable via resistance, voltage, current, or optional IEEE-488/RS232. While other supplies can remotely control only output voltage and current, **PQ SERIES** units also allow programming of over voltage and over current protection. Program lines are constantly monitored for range of operation. If a line should open or if a programmable input is set beyond that anticipated, the unit safely shuts down protecting the load.


PQ SERIES can operate as a voltage source or current source depending on the control settings and load conditions. If the power supply is operating as a voltage source and the load increases to a point beyond the current command setting, the power supply automatically crosses over to current mode control and operates as a current source at that setting.

Differential feedback amplifiers allow remote load sensing at any distance from the power supply. Additional differential amplifiers are provided for master/slave series or parallel operation.

Diagnostic functions are contained directly within the supply's control loop. Exclusive circuitry eliminates guesswork about which function has control -- voltage, current, or a fault condition. If the fault condition requires user attention, main power is disconnected and the diagnostic condition is latched into memory. Pressing the reset switch clears the memory. All diagnostic functions are monitored with optical isolators that can be paralleled for master/slave operation. Furthermore, control functions are also set through optical isolators to allow simultaneous control of one or more **PQ SERIES** units. Programming switches in the rear of the supply enable internal operation of controls, external operation, or both.

PQ SERIES supplies have three levels of over voltage/current protection: shutdown of controlling insulated gate bipolar transistors (IGBT's), disconnect of main power, and optional SCR crowbar. After an over voltage/current condition, the supply must be reset. Pressing the reset switch causes the over voltage/current settings to be displayed on the front meters.

PQ SERIES have push button start/stop controls. These controls are tied to a mechanical contactor which operate with the electronic switches to break the ac mains when stop is commanded. Unlike competing products, an off means both an electrical and mechanical break in the power circuit — not a break in an electronic switch. Safety comes first at Magna-Power Electronics.

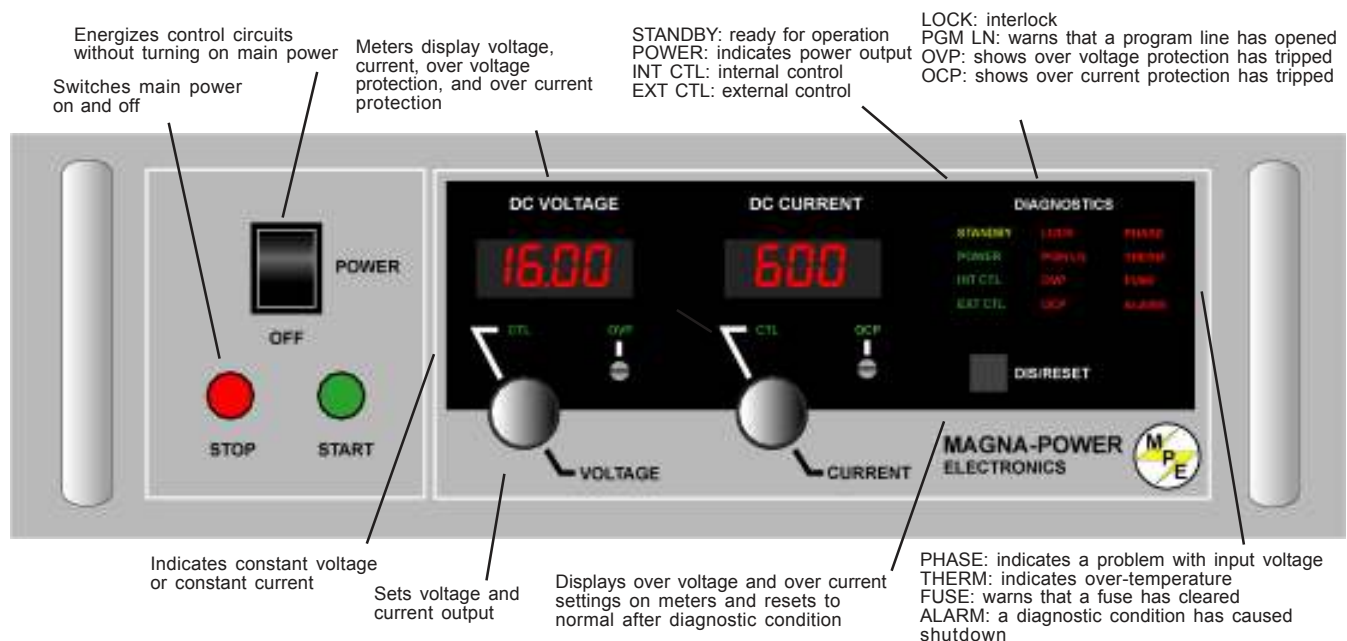



MAGNA-POWER
ELECTRONICS, INC.

81 Fulton Street, Boonton, NJ 07005
(973) 263-0017 FAX: (973) 263-1928
E-mail: sales@magna-power.com
<http://www.magna-power.com>


PQ SERIES

HIGH-EFFICIENCY OPERATION!

OUTLINE DRAWINGS AND ELECTRICAL INTERFACE

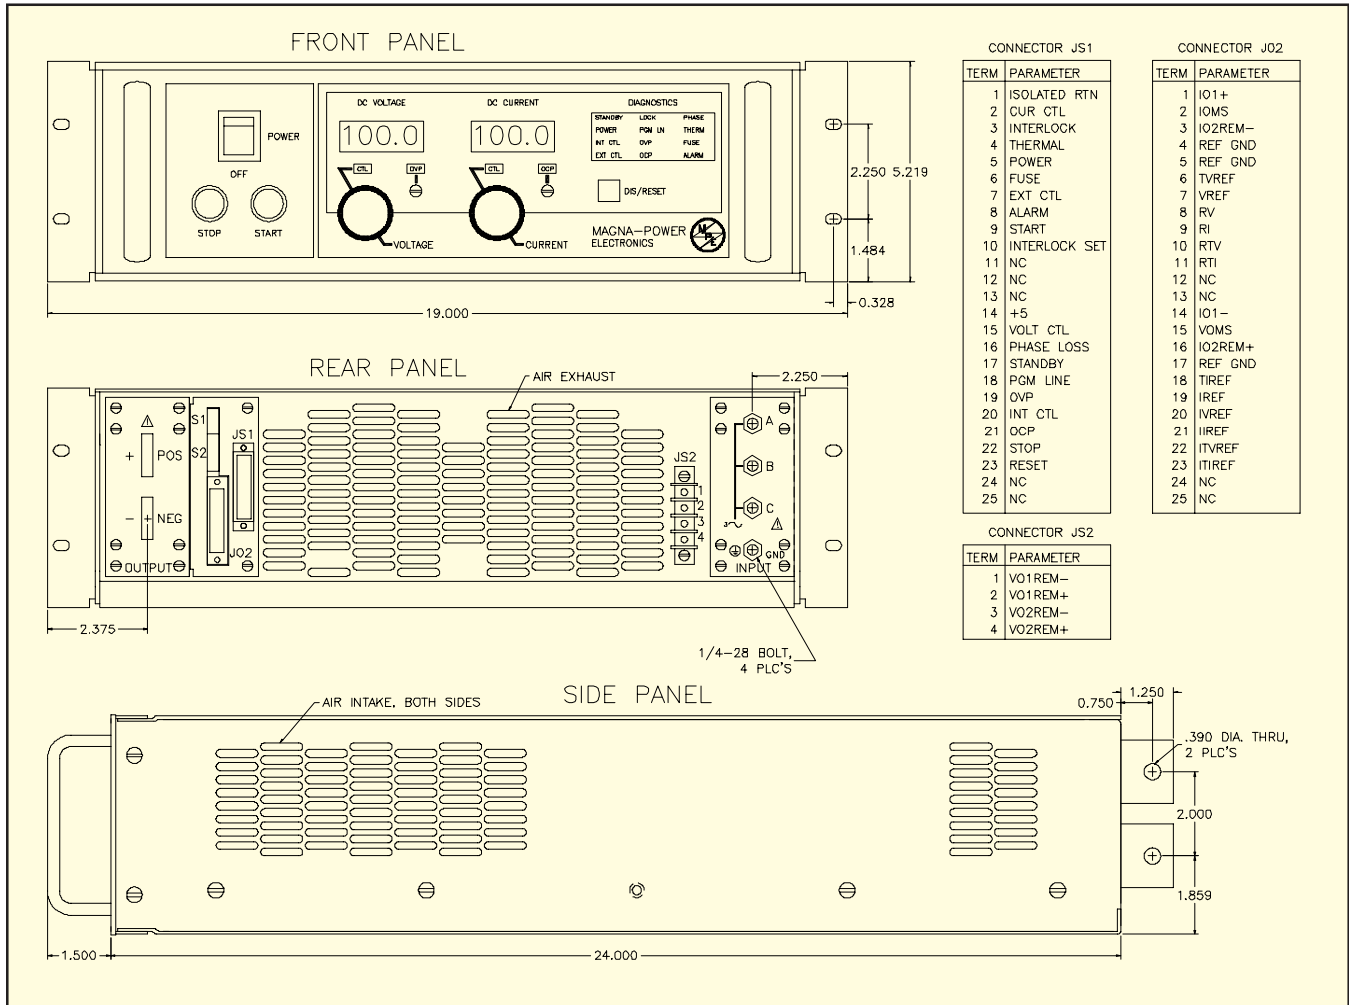

The PQ Series uses two dip switches to configure the unit for custom applications. Switch S1 sets the power supply for remote sense, remote interlock protection, external control, or internal control. External control allows the PQ unit to be remotely controlled via start, stop, and reset commands. Enabling both internal and external controls allows control both internally and externally.



Switch S2 configures the four analog control lines: output voltage, output current, output voltage trip, and output current trip. The switches enables the PQ Series power supplies to be controlled via voltage, current, resistance, or optional IEEE488/RS232.

To connect the PQ power supply to the SBC488, the IEEE488/RS232 interface, attach two DB25 male to female cables and set all elements of switch S2 to 0. It is that easy.



MAGNA-POWER
ELECTRONICS, INC.

81 Fulton Street, Boonton, NJ 07005
(973) 263-0017 FAX: (973) 263-1928
E-mail: sales@magna-power.com
http://www.magna-power.com