

Agilent 89411A

21.4 MHz Downconverter

Data Sheet

Specifications describe warranted performance over the temperature range of 0°C to 55°C (except where noted) and include a 30-minute warm-up from ambient conditions unless otherwise noted.

Definitions


CF = Center frequency

dBc = dB relative to input signal level

dBfs = dB relative to full scale amplitude

FS or fs = Full scale; synonymous with input range

RH = Relative humidity

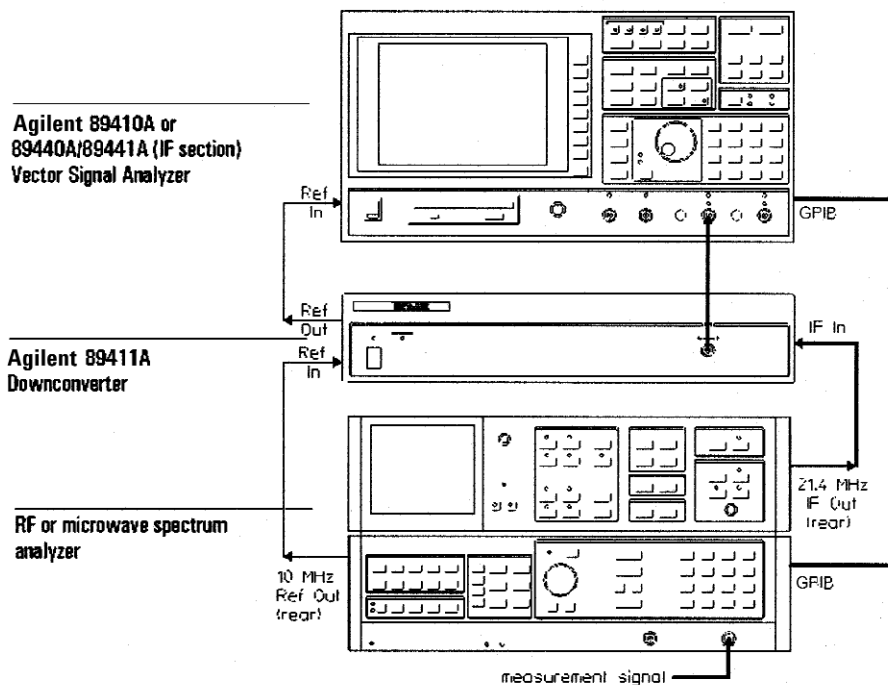

89411A Data Sheet

Input

Input impedance (nominal)	50 ohm
Input center frequency	21.4 MHz
Input frequency span	± 3.6 MHz
Full scale input amplitude (no attenuation)	-20 dBm
Input attenuation (switch selectable)	0, 5, 10, or 15 dB

Output

Output impedance (nominal)	50 ohm
Output center frequency	5.6 MHz
Conversion gain (with 0 dB attenuation, at 5.6 MHz)	5 dB
Conversion gain accuracy (including attenuator) over limited temperature range of 20°C to 30°C	± 0.75 dB
Output bandwidth (nominal)	8 MHz
Output flatness (Relative to gain at 5.6 MHz for inputs within ± 3.6 MHz of center frequency)	± 1.5 dB

Dynamic range

Third-order intermodulation distortion (with two signals at -6 dBfs)	≤ -70 dBc
Spurious responses within band input signal at full scale	≤ -80 dBc
Residual responses relative to full scale. Applies over output frequency range of 2 to 9.6 MHz.	≤ -80 dBfs
Out-of-band residual responses relative to full scale	≤ -60 dBfs
Noise floor	≤ -115 dBfs/Hz

Phase noise

100 Hz offset	≤ -110 dBc/Hz
>1 kHz offset	≤ -115 dBc/Hz

10 MHz reference

Required input level	> 0 dBm, < +5 dBm
Output level	≥ 0 dBm

General

Safety standards	CSA Certified for Electronic Test and Measurement Equipment per CSA C22.2, No. 231
This product is designed for compliance to	UL1244 IEC348, 1978
EMI/RFI Standards	CISPR 11, ISM1-A
Acoustics (fan)	LpA <50 dB
Environmental operating restrictions	
Class A2 survival vibration and shock	
Class B2 otherwise	
Ambient temperature (Unless otherwise noted)	0°C to 55°C
Maximum humidity at 0°C to 40°C	95% RH at 40°C noncondensing
Maximum altitude	2300 meters (7,500 feet)
Storage and transport restrictions	
Ambient temperature	-40°C to 75°C
Maximum humidity	95% RH at 40°C noncondensing
Maximum altitude	4600 meters (15,000 feet)
AC power	
110/120 VAC operation	90 - 132 Vrms, 47 - 440 Hz
220/240 VAC operation	198 - 264 Vrms, 47 - 63 Hz
Maximum power dissipation	100 VA maximum
Fuse	
110/120 VAC operation	1 amp normal blow
220/240 VAC operation	500 milliamp normal blow
Warm-up time	30 minutes
Weight	9.1 kg (20 lb) net 11.8 kg (26 lb) shipping
Dimensions	
Height	90 mm (3.5 in)
Width	426 mm (16.75 in)
Depth	520 mm (20.5 in)

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

"Our Promise" means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

"Your Advantage" means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

By internet, phone, or fax, get assistance with all your test and measurement needs.

Online Assistance

www.agilent.com/find/assist

Phone or Fax

United States:

(tel) 1 800 452 4844

Canada:

(tel) 1 877 894 4414

(fax) (905) 206 4120

Europe:

(tel) (31 20) 547 2323

(fax) (31 20) 547 2390

Japan:

(tel) (81) 426 56 7832

(fax) (81) 426 56 7840

Latin America:

(tel) (305) 269 7500

(fax) (305) 269 7599

Australia:

(tel) 1 800 629 485

(fax) (61 3) 9210 5947

New Zealand:

(tel) 0 800 738 378

(fax) (64 4) 495 8950

Asia Pacific:

(tel) (852) 3197 7777

(fax) (852) 2506 9284

Product specifications and descriptions in this document subject to change without notice.

Copyright © 1994, 2000 Agilent Technologies

Printed in U.S.A. 9/00

5962-7210E



Agilent Technologies

Innovating the HP Way