

R&S®FSV

Signal and Spectrum Analyzer

Specifications



CONTENTS

Specifications.....	3
Frequency	3
Sweep time.....	4
Resolution bandwidths.....	5
Level.....	6
Measurement speed	12
Trigger functions.....	12
I/Q data	13
Inputs and outputs	14
General data.....	16
Options	17
R&S®FSV-B3 audio demodulator.....	17
R&S®FSV-B5 additional interfaces.....	17
R&S®FSV-B9 tracking generator.....	18
R&S®FSV-B10 external generator control	19
R&S®FSV-B17 digital baseband interface.....	19
R&S®FSV-B21 LO/IF ports for external mixers (for R&S®FSV30 and R&S®FSV40 only).....	20
R&S®FSV-B30 DC power supply for 12 V supply voltage	21
R&S®FSV-B32 Lithium-ion battery pack.....	21
R&S®FSV-B34 charger for R&S®FSV-B32 battery pack.....	21
Ordering information	22
Options.....	22
Upgrade Kits for R&S®FSV 1307.9002.xx	23
Recommended extras.....	24
Power sensors supported by the R&S®FSV-K9 option	25

Specifications

Specifications apply under the following conditions: 30 minutes warm-up time at ambient temperature, specified environmental conditions met, calibration cycle adhered to, and all internal automatic adjustments performed. Data without tolerances: typical values only. Data designated "nominal" applies to design parameters and is not tested.

Rohde & Schwarz equipment is designed for reliable operation up to an altitude of 3000 m above sea level, and for transport up to an altitude of 4500 m above sea level.


Frequency

Frequency range	R&S®FSV4	
	DC-coupled	10 Hz to 4 GHz
	AC-coupled	1 MHz to 4 GHz
	R&S®FSV7	
	DC-coupled	10 Hz to 7 GHz
	AC-coupled	1 MHz to 7 GHz
	R&S®FSV13	
	DC-coupled	10 Hz to 13.6 GHz
	AC-coupled	10 MHz to 13.6 GHz
	R&S®FSV30	
	DC-coupled	10 Hz to 30 GHz
	AC-coupled	10 MHz to 30 GHz
	R&S®FSV40	
	DC-coupled	10 Hz to 40 GHz
	AC-coupled	10 MHz to 40 GHz
Frequency resolution		0.01 Hz

Reference frequency, internal		
Accuracy		(time since last adjustment × aging rate) + temperature drift + calibration accuracy
Aging per year	standard	1×10^{-6}
	with R&S®FSV-B4 OCXO reference frequency option	1×10^{-7}
	with R&S®FSV-B14 ultra-high precision reference frequency option	4×10^{-9}
Temperature drift (0 °C to +50 °C)	standard	1×10^{-6}
	with R&S®FSV-B4 OCXO reference frequency option, model .02	1×10^{-7}
	with R&S®FSV-B4 OCXO extended frequency stability option, model .03	1×10^{-8}
	with R&S®FSV-B14 ultra-high precision reference frequency option	5×10^{-10}
Achievable initial calibration accuracy	standard	5×10^{-7}
	with R&S®FSV-B4 OCXO reference frequency option	5×10^{-8}
	with R&S®FSV-B14 ultra-high precision reference frequency option	1×10^{-10}

Frequency readout		
Marker resolution		1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference uncertainty} + 10 \% \times \text{resolution bandwidth} + \frac{1}{2} (\text{span} / (\text{sweep points} - 1)) + 1 \text{ Hz})$
Number of sweep (trace) points	default value	691
	range	101 to 32001
Marker tuning frequency step size	marker step size = sweep points	span / (sweep points – 1)
	marker step size = standard	span / (default sweep points – 1)
Frequency counter resolution		0.001 Hz
Count accuracy		$\pm(\text{frequency} \times \text{reference uncertainty} + \frac{1}{2} (\text{last digit}))$
Display range for frequency axis		0 Hz, 10 Hz to max. frequency
Resolution		0.1 Hz
Max. span deviation		0.1 %

Spectral purity		
SSB phase noise	frequency = 500 MHz, carrier offset	
	100 Hz	< -84 dBc (1 Hz)
	1 kHz	< -101 dBc (1 Hz)
	10 kHz	< -106 dBc (1 Hz)
	100 kHz	< -115 dBc (1 Hz)
	1 MHz	< -134 dBc (1 Hz)
	10 MHz	-150 dBc (1 Hz) (typ.)
Residual FM	frequency = 500 MHz, RBW = 1 kHz, sweep time = 100 ms	< 3 Hz (nom.)

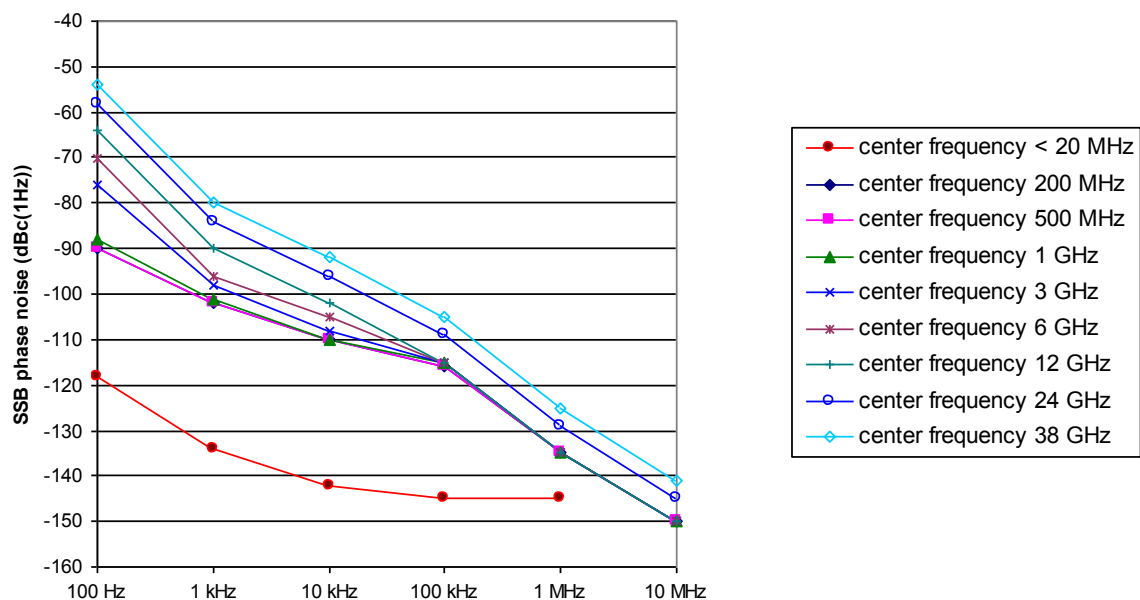

Typical phase noise at different center frequencies.

Sweep time

Range	span = 0 Hz	1 μ s to 16000 s
	span $\geq$ 10 Hz, swept	1 ms to 16000 s ¹
	span $\geq$ 10 Hz, FFT	7 μ s to 16000 s ²
Sweep time accuracy	span = 0 Hz	0.1 % (nom.)
	span $\geq$ 10 Hz, swept	3 % (nom.)

¹ Net sweep time without additional hardware settling time.

² Time for data acquisition for FFT calculation.

Resolution bandwidths

Sweep filters and FFT filters		
Resolution bandwidths (–3 dB)	span ≥ 10 Hz, sweep filters	1 Hz to 10 MHz in 1/2/3/5 sequence
	span ≥ 10 Hz, FFT filters	1 Hz to 3 MHz in 1/2/3/5 sequence
	span = 0 Hz, all models except R&S®FSV40, model .39	20 MHz, 28 MHz additionally
	with R&S®FSV-B70 option, span = 0 Hz, $f \leq 7$ GHz	40 MHz additionally
Bandwidth uncertainty		< 3 % (nom.)
Shape factor 60 dB:3 dB		< 5 (nom.)
Channel filters		
Bandwidths (–3 dB)	standard (RRC = root raised cosine)	100 Hz, 200 Hz, 300 Hz, 500 Hz
		1/1.5/2/2.4/2.7/3/3.4/4/4.5/5/6/8.5/9/10/ 12.5/14/15/16/18 (RRC)/20/21/ 24.3 (RRC)/25/30/50/100/150/192/200/ 300/500 kHz
		1/1.228/1.28 (RRC)/1.5/2/3/ 3.84 (RRC)/4.096 (RRC)/5/10 MHz
	all models except R&S®FSV40, model .39 with R&S®FSV-B70 option, $f \leq 7$ GHz	20 MHz, 28 MHz additionally 40 MHz additionally
Bandwidth uncertainty		< 2 % (nom.)
Shape factor 60 dB:3 dB		< 2 (nom.)
EMI filters (with R&S®FSV-K54 only)		
Bandwidths (–6 dB)		200 Hz, 9 kHz, 120 kHz, 1 MHz
Bandwidth uncertainty		< 3 % (nom.)
Shape factor 60 dB:3 dB		< 6 (nom.)
Video bandwidths		
	standard	1 Hz to 10 MHz in 1/2/3/5 sequence
	all models except R&S®FSV40, model .39	20 MHz, 28 MHz additionally
	with R&S®FSV-B70 option, $f \leq 7$ GHz	40 MHz additionally
Signal analysis bandwidth (equalized)		
	$f \leq 7$ GHz	
	all models except R&S®FSV40, model .39	28 MHz (nom.)
	with R&S®FSV-B70 option	40 MHz (nom.)
	with R&S®FSV-B160 option	160 MHz (nom.)
	R&S®FSV40, model .39	10 MHz (nom.)

Level

Display range		displayed noise floor up to +30 dBm
---------------	--	-------------------------------------

Max. input level		
DC voltage	AC-coupled	50 V
	DC-coupled	0 V
CW RF power	RF attenuation 0 dB	
	RF preamplifier = off	20 dBm (= 0.1 W)
	with R&S®FSV-B22 or R&S®FSV-B24 option, RF preamplifier = on	13 dBm (= 0.02 W)
	RF attenuation ≥ 10 dB	
	RF preamplifier = off	30 dBm (= 1 W)
	with R&S®FSV-B22 or R&S®FSV-B24 option, RF preamplifier = on	23 dBm (= 0.2 W)
Pulse spectral density	RF attenuation 0 dB, RF preamplifier = off	97 dB μ V/MHz
Max. pulse voltage	RF attenuation ≥ 10 dB	150 V
Max. pulse energy	RF attenuation ≥ 10 dB, 10 μ s	1 mWs

Intermodulation		
1 dB compression of input mixer	RF attenuation 0 dB, RF preamplifier = off	
	$f \leq 7$ GHz	+3 dBm (nom.)
	$f > 7$ GHz	+5 dBm (nom.)
	with R&S®FSV-B22 or R&S®FSV-B24 option, RF preamplifier = on, RF attenuation 0 dB	
	$f \leq 7$ GHz	–12 dBm (nom.)
	$f > 7$ GHz	–25 dBm (nom.)
Third-order intercept point (TOI)	RF attenuation 0 dB, level 2×-15 dBm, $\Delta f > 5 \times$ RBW or 10 kHz, whichever is larger, RF preamplifier = off	
	$10 \text{ MHz} \leq f_{in} < 100 \text{ MHz}$	> 12 dBm, 15 dBm (typ.)
	$100 \text{ MHz} \leq f_{in} < 3.6 \text{ GHz}$	> 13 dBm, 16 dBm (typ.)
	$3.6 \text{ GHz} \leq f_{in} \leq 40 \text{ GHz}$	> 15 dBm, 18 dBm (typ.)
	with R&S®FSV-B22 or R&S®FSV-B24 option, RF preamplifier = on, RF attenuation 0 dB, level 2×-45 dBm, $\Delta f > 5 \times$ RBW or 10 kHz, whichever is larger	
	$10 \text{ MHz} \leq f_{in} < 100 \text{ MHz}$	–3 dBm (nom.)
	$100 \text{ MHz} \leq f_{in} < 3.6 \text{ GHz}$	–2 dBm (nom.)
	$3.6 \text{ GHz} \leq f_{in} < 7 \text{ GHz}$	0 dBm (nom.)
	$7 \text{ GHz} \leq f_{in} \leq 40 \text{ GHz}$	–10 dBm (nom.)
Second harmonic intercept (SHI)	RF attenuation 0 dB, level –10 dBm, RF preamplifier = off	
	$100 \text{ MHz} < f_{in} \leq 3.5 \text{ GHz}$	45 dBm (typ.)
	$3.5 \text{ GHz} < f_{in} \leq 20 \text{ GHz}$	
	standard	80 dBm (typ.)
	with R&S®FSV-B24 option	75 dBm (typ.)
	with R&S®FSV-B22 or R&S®FSV-B24 option, RF preamplifier = on, RF attenuation 0 dB, level –40 dBm	
	$100 \text{ MHz} < f_{in} \leq 3.5 \text{ GHz}$	25 dBm (nom.)
	$3.5 \text{ GHz} < f_{in} \leq 20 \text{ GHz}$	10 dBm (nom.)

Displayed average noise level without preamplifier options

0 dB RF attenuation, termination 50 Ω , log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker, R&S®FSV-B160 option not installed
R&S®FSV4, R&S®FSV7

9 kHz $\leq f < 100$ kHz	< -130 dBm, -140 dBm (typ.)
100 kHz $\leq f < 1$ MHz	< -145 dBm, -150 dBm (typ.)
1 MHz $\leq f < 1$ GHz	< -152 dBm, -155 dBm (typ.)
1 GHz $\leq f < 3.6$ GHz	< -150 dBm, -153 dBm (typ.)
3.6 GHz $\leq f < 6$ GHz	< -148 dBm, -151 dBm (typ.)
6 GHz $\leq f \leq 7$ GHz	< -146 dBm, -149 dBm (typ.)

R&S®FSV13, R&S®FSV30

9 kHz $\leq f < 100$ kHz	< -130 dBm, -140 dBm (typ.)
100 kHz $\leq f < 1$ MHz	< -145 dBm, -150 dBm (typ.)
1 MHz $\leq f < 1$ GHz	< -151 dBm, -154 dBm (typ.)
1 GHz $\leq f < 3.6$ GHz	< -149 dBm, -152 dBm (typ.)
3.6 GHz $\leq f < 6$ GHz	< -146 dBm, -149 dBm (typ.)
6 GHz $\leq f < 7.4$ GHz	< -144 dBm, -147 dBm (typ.)
7.4 GHz $\leq f < 15$ GHz	< -148 dBm, -151 dBm (typ.)
15 GHz $\leq f \leq 30$ GHz	< -144 dBm, -147 dBm (typ.)

R&S®FSV40

9 kHz $\leq f < 100$ kHz	< -130 dBm, -140 dBm (typ.)
100 kHz $\leq f < 1$ MHz	< -145 dBm, -150 dBm (typ.)
1 MHz $\leq f < 1$ GHz	< -151 dBm, -154 dBm (typ.)
1 GHz $\leq f < 3.6$ GHz	< -149 dBm, -152 dBm (typ.)
3.6 GHz $\leq f < 6$ GHz	< -146 dBm, -149 dBm (typ.)
6 GHz $\leq f < 7.4$ GHz	< -144 dBm, -147 dBm (typ.)
7.4 GHz $\leq f < 15$ GHz	< -145 dBm, -148 dBm (typ.)
15 GHz $\leq f < 34$ GHz	< -142 dBm, -145 dBm (typ.)
34 GHz $\leq f \leq 40$ GHz	< -136 dBm, -139 dBm (typ.)

with R&S®FSV-B160 option installed, add 1.5 dB to the above specifications for $f > 7$ GHz

0 dB RF attenuation, termination 50 Ω , log. scaling, normalized to 1 Hz RBW, RBW = 5 Hz, VBW = 5 Hz, zero span, sweep time 500 ms, sample detector, trace average, sweep count = 20, mean marker, R&S®FSV-B160 option not installed

10 Hz	< -90 dBm (nom.)
20 Hz	< -100 dBm, -110 dBm (typ.)
100 Hz	< -110 dBm, -120 dBm (typ.)
1 kHz	< -120 dBm, -130 dBm (typ.)

with R&S®FSV-B160 option installed, add 1.5 dB to the above specifications for $f > 7$ GHz

Displayed average noise level with R&S®FSV-B22 preamplifier option

0 dB RF attenuation, termination 50 Ω , log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker, R&S®FSV-B160 option not installed, RF preamplifier = off

R&S®FSV4, R&S®FSV7

9 kHz $\leq f < 100$ kHz	< -130 dBm, -140 dBm (typ.)
100 kHz $\leq f < 1$ MHz	< -145 dBm, -150 dBm (typ.)
1 MHz $\leq f < 1$ GHz	< -152 dBm, -155 dBm (typ.)
1 GHz $\leq f < 3.6$ GHz	< -150 dBm, -153 dBm (typ.)
3.6 GHz $\leq f < 6$ GHz	< -148 dBm, -151 dBm (typ.)
6 GHz $\leq f \leq 7$ GHz	< -146 dBm, -149 dBm (typ.)

R&S®FSV13, R&S®FSV30

9 kHz $\leq f < 100$ kHz	< -130 dBm, -140 dBm (typ.)
100 kHz $\leq f < 1$ MHz	< -145 dBm, -150 dBm (typ.)
1 MHz $\leq f < 1$ GHz	< -151 dBm, -154 dBm (typ.)
1 GHz $\leq f < 3.6$ GHz	< -149 dBm, -152 dBm (typ.)
3.6 GHz $\leq f < 6$ GHz	< -146 dBm, -149 dBm (typ.)
6 GHz $\leq f < 7.4$ GHz	< -144 dBm, -147 dBm (typ.)
7.4 GHz $\leq f < 15$ GHz	< -148 dBm, -151 dBm (typ.)
15 GHz $\leq f \leq 30$ GHz	< -144 dBm, -147 dBm (typ.)

R&S®FSV40

9 kHz $\leq f < 100$ kHz	< -130 dBm, -140 dBm (typ.)
100 kHz $\leq f < 1$ MHz	< -145 dBm, -150 dBm (typ.)
1 MHz $\leq f < 1$ GHz	< -151 dBm, -154 dBm (typ.)
1 GHz $\leq f < 3.6$ GHz	< -149 dBm, -152 dBm (typ.)
3.6 GHz $\leq f < 6$ GHz	< -146 dBm, -149 dBm (typ.)
6 GHz $\leq f < 7.4$ GHz	< -144 dBm, -147 dBm (typ.)
7.4 GHz $\leq f < 15$ GHz	< -145 dBm, -148 dBm (typ.)
15 GHz $\leq f < 34$ GHz	< -142 dBm, -145 dBm (typ.)
34 GHz $\leq f \leq 40$ GHz	< -136 dBm, -139 dBm (typ.)

with R&S®FSV-B160 option installed, add 1.5 dB to the above specifications for $f > 7$ GHz

0 dB RF attenuation, termination 50 Ω , log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker, R&S®FSV-B160 option not installed, RF preamplifier = on

R&S®FSV4, R&S®FSV7

100 kHz $\leq f < 1$ MHz	< -150 dBm, -155 dBm (typ.)
1 MHz $\leq f < 1$ GHz	< -162 dBm, -165 dBm (typ.)
1 GHz $\leq f < 3.6$ GHz	< -160 dBm, -163 dBm (typ.)
3.6 GHz $\leq f < 6$ GHz	< -158 dBm, -161 dBm (typ.)
6 GHz $\leq f \leq 7$ GHz	< -156 dBm, -159 dBm (typ.)

R&S®FSV13, R&S®FSV30, R&S®FSV40

100 kHz $\leq f < 1$ MHz	< -145 dBm, -148 dBm (typ.)
1 MHz $\leq f < 20$ MHz	< -155 dBm, -158 dBm (typ.)
20 MHz $\leq f < 1$ GHz	< -161 dBm, -164 dBm (typ.)
1 GHz $\leq f < 3.6$ GHz	< -159 dBm, -162 dBm (typ.)
3.6 GHz $\leq f < 6$ GHz	< -156 dBm, -159 dBm (typ.)
6 GHz $\leq f \leq 7$ GHz	< -154 dBm, -157 dBm (typ.)

with R&S®FSV-B160 option installed, add 1.5 dB to the above specifications for $f > 7$ GHz

0 dB RF attenuation, termination 50 Ω , log. scaling, normalized to 1 Hz RBW, RBW = 5 Hz, VBW = 5 Hz, zero span, sweep time 500 ms, sample detector, trace average, sweep count = 20, mean marker, R&S®FSV-B160 option not installed, RF preamplifier = off

10 Hz	< -90 dBm (nom.)
20 Hz	< -100 dBm, -110 dBm (typ.)
100 Hz	< -110 dBm, -120 dBm (typ.)
1 kHz	< -120 dBm, -130 dBm (typ.)

with R&S®FSV-B160 option installed, add 1.5 dB to the above specifications for $f > 7$ GHz

Displayed average noise level with R&S®FSV-B24 preamplifier option ⁴

0 dB RF attenuation, termination 50 Ω , log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker, R&S®FSV-B160 option not installed, RF preamplifier = off

R&S®FSV13, R&S®FSV30

9 kHz $\leq f < 100$ kHz	< -130 dBm, -140 dBm (typ.)
100 kHz $\leq f < 1$ MHz	< -145 dBm, -150 dBm (typ.)
1 MHz $\leq f < 1$ GHz	< -150 dBm, -153 dBm (typ.)
1 GHz $\leq f < 3.6$ GHz	< -147 dBm, -150 dBm (typ.)
3.6 GHz $\leq f < 6$ GHz	< -144 dBm, -147 dBm (typ.)
6 GHz $\leq f < 7.4$ GHz	< -141 dBm, -144 dBm (typ.)
7.4 GHz $\leq f < 13.6$ GHz	< -145 dBm, -148 dBm (typ.)
13.6 GHz $\leq f < 15$ GHz	< -143 dBm, -146 dBm (typ.)
15 GHz $\leq f \leq 30$ GHz	< -141 dBm, -144 dBm (typ.)

R&S®FSV40

9 kHz $\leq f < 100$ kHz	< -130 dBm, -140 dBm (typ.)
100 kHz $\leq f < 1$ MHz	< -145 dBm, -150 dBm (typ.)
1 MHz $\leq f < 1$ GHz	< -150 dBm, -153 dBm (typ.)
1 GHz $\leq f < 3.6$ GHz	< -147 dBm, -150 dBm (typ.)
3.6 GHz $\leq f < 6$ GHz	< -144 dBm, -147 dBm (typ.)
6 GHz $\leq f < 7.4$ GHz	< -141 dBm, -144 dBm (typ.)
7.4 GHz $\leq f < 13.6$ GHz	< -143 dBm, -146 dBm (typ.)
13.6 GHz $\leq f < 15$ GHz	< -141 dBm, -144 dBm (typ.)
15 GHz $\leq f < 34$ GHz	< -139 dBm, -142 dBm (typ.)
34 GHz $\leq f \leq 40$ GHz	< -132 dBm, -135 dBm (typ.)

with R&S®FSV-B160 option installed, add 1.5 dB to the above specifications for $f > 7$ GHz

0 dB RF attenuation, termination 50 Ω , log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker, R&S®FSV-B160 option not installed, RF preamplifier = on

R&S®FSV13, R&S®FSV30, R&S®FSV40

100 kHz $\leq f < 1$ MHz	< -145 dBm, -148 dBm (typ.)
1 MHz $\leq f < 20$ MHz	< -155 dBm, -158 dBm (typ.)
20 MHz $\leq f < 1$ GHz	< -160 dBm, -163 dBm (typ.)
1 GHz $\leq f < 3.6$ GHz	< -157 dBm, -160 dBm (typ.)
3.6 GHz $\leq f < 6$ GHz	< -153 dBm, -156 dBm (typ.)
6 GHz $\leq f < 7.4$ GHz	< -150 dBm, -153 dBm (typ.)
7.4 GHz $\leq f < 15$ GHz	< -164 dBm, -167 dBm (typ.)
15 GHz $\leq f < 34$ GHz	< -159 dBm, -162 dBm (typ.)
34 GHz $\leq f \leq 40$ GHz	< -154 dBm, -156 dBm (typ.)

with R&S®FSV-B160 option installed, add 1.5 dB to the above specifications for $f > 7$ GHz

0 dB RF attenuation, termination 50 Ω , log. scaling, normalized to 1 Hz RBW, RBW = 5 Hz, VBW = 5 Hz, zero span, sweep time 500 ms, sample detector, trace average, sweep count = 20, mean marker, R&S®FSV-B160 option not installed, RF preamplifier = off

10 Hz	< -90 dBm (nom.)
20 Hz	< -100 dBm, -110 dBm (typ.)
100 Hz	< -110 dBm, -120 dBm (typ.)
1 kHz	< -120 dBm, -130 dBm (typ.)

with R&S®FSV-B160 option installed, add 1.5 dB to the above specifications for $f > 7$ GHz

Spurious responses		
Image response	20 MHz $\leq f \leq$ 7 GHz	
	$f_{in} - 2 \times 8409.9$ MHz (1st IF)	< -80 dBc (typ.)
	$f_{in} - 2 \times 729.9$ MHz (2nd IF)	< -80 dBc
	$f_{in} - 2 \times 89.9$ MHz (3rd IF)	< -80 dBc
	7 GHz < $f \leq$ 30 GHz	
	$f_{in} \pm 2 \times 729.9$ MHz (1st IF)	< -80 dBc
	$f_{in} - 2 \times 89.9$ MHz (2nd IF)	< -80 dBc
	30 GHz < $f \leq$ 40 GHz	
	$f_{in} \pm 2 \times 729.9$ MHz (1st IF)	< -70 dBc
	$f_{in} - 2 \times 89.9$ MHz (2nd IF)	< -80 dBc
Intermediate frequency response	20 MHz $\leq f \leq$ 7 GHz	
	1st IF (8409.9 MHz)	< -70 dBc (typ.)
	2nd IF (729.9 MHz)	< -80 dBc
	3rd IF (89.9 MHz)	< -80 dBc
	7 GHz < $f \leq$ 40 GHz	
	1st IF (729.9 MHz)	< -80 dBc
	2nd IF (89.9 MHz)	< -80 dBc
Residual spurious response	0 dB RF attenuation	
	$f \leq 1$ MHz	< -90 dBm
	$f > 1$ MHz	< -103 dBm
Local oscillator related spurious	$f < 15$ GHz	
	1 kHz $\leq$ carrier offset $\leq$ 10 MHz	< -70 dBc
	carrier offset > 10 MHz	< -80 dBc
	15 GHz $\leq f < 30$ GHz	
	1 kHz $\leq$ carrier offset $\leq$ 10 MHz	< -64 dBc
	carrier offset > 10 MHz	< -74 dBc
	30 GHz $\leq f \leq 40$ GHz	
	1 kHz $\leq$ carrier offset $\leq$ 10 MHz	< -58 dBc
	carrier offset > 10 MHz	< -68 dBc
Other interfering signals		
Subharmonic of 1st LO	20 MHz $\leq f < 7$ GHz, spurious at $8410 \text{ MHz} - 2 \times f_{in}$	< -70 dBc
Harmonic of 1st LO	mixer level < -25 dBm, spurious at $f_{in} - 4205$ MHz	< -70 dBc

Level display		
Logarithmic level axis		1 dB to 200 dB, in steps of 1/2/5
Linear level axis		10 % of reference level per level division, 10 divisions or logarithmic scaling
Number of traces		6
Trace detector		max. peak, min. peak, auto peak (normal), sample, RMS, average
	with R&S®FSV-K54	quasi-peak additionally
Trace functions		clear/write, max. hold, min. hold, average, view
Setting range of reference level		-130 dBm to (-10 dBm + RF attenuation - RF preamplifier gain), in steps of 0.01 dB
Units of level axis	logarithmic level display	dBm, dB μ V, dBmV, dB μ A, dBpW
	linear level display	μ V, mV, μ A, mA, pW, nW

Level measurement uncertainty		
Absolute level uncertainty at 64 MHz	RBW = 10 kHz, level –10 dBm, reference level –10 dBm, RF attenuation 10 dB	
	+20 °C to +30 °C	< 0.2 dB ($\sigma = 0.07$ dB)
	0 °C to +50 °C	< 0.35 dB ($\sigma = 0.12$ dB)
Frequency response referenced to 64 MHz	DC coupling, RF attenuation 10 dB, 20 dB, 30 dB, 40 dB, RF preamplifier = off, +20 °C to +30 °C	
	9 kHz $\leq f < 10$ MHz	< 0.5 dB ($\sigma = 0.17$ dB)
	10 MHz $\leq f < 3.6$ GHz	< 0.3 dB ($\sigma = 0.1$ dB)
	3.6 GHz $\leq f < 7$ GHz	< 0.5 dB ($\sigma = 0.17$ dB)
	7 GHz $\leq f < 13.6$ GHz, span < 1 GHz	< 1.5 dB ($\sigma = 0.5$ dB)
	13.6 GHz $\leq f < 30$ GHz, span < 1 GHz	< 2 dB ($\sigma = 0.66$ dB)
	30 GHz $\leq f \leq 40$ GHz, span < 1 GHz	< 2.5 dB ($\sigma = 0.83$ dB)
	any setting of RF attenuation, RF preamplifier = off, 0 °C to +50 °C	
	9 kHz $\leq f < 3.6$ GHz	< 1 dB ($\sigma = 0.33$ dB)
	3.6 GHz $\leq f < 7$ GHz	< 1.5 dB ($\sigma = 0.5$ dB)
	7 GHz $\leq f < 13.6$ GHz	< 2.5 dB ($\sigma = 0.83$ dB)
	13.6 GHz $\leq f < 30$ GHz	< 3 dB ($\sigma = 1$ dB)
	30 GHz $\leq f \leq 40$ GHz	< 3.5 dB ($\sigma = 1.33$ dB)
	any setting of RF attenuation, RF preamplifier = on, 0 °C to +50 °C	
	9 kHz $\leq f < 3.6$ GHz	< 1 dB ($\sigma = 0.33$ dB)
	3.6 GHz $\leq f < 7$ GHz	< 1.5 dB ($\sigma = 0.5$ dB)
	7 GHz $\leq f < 13.6$ GHz	< 3 dB ($\sigma = 1$ dB)
	13.6 GHz $\leq f < 30$ GHz	< 3.5 dB ($\sigma = 1.17$ dB)
	30 GHz $\leq f \leq 40$ GHz	< 4 dB ($\sigma = 1.33$ dB)
	DC coupling, RF preamplifier = off, 0 °C to +50 °C	
	10 Hz $\leq f < 20$ Hz	< 1.5 dB (nom.)
	20 Hz $\leq f < 9$ kHz	< 1 dB ($\sigma = 0.33$ dB)
Attenuator switching uncertainty	f = 64 MHz, 0 dB to 70 dB, referenced to 10 dB attenuation	< 0.2 dB ($\sigma = 0.07$ dB)
Uncertainty of reference level setting		0 dB ³
Bandwidth switching uncertainty	referenced to RBW = 10 kHz	
	sweep filters	< 0.1 dB ($\sigma = 0.04$ dB)
	FFT filters	< 0.2 dB ($\sigma = 0.07$ dB)
Display nonlinearity		
Logarithmic level display	+5 °C to +40 °C, S/N > 16 dB	
	0 dB to –70 dB	< 0.1 dB ($\sigma = 0.04$ dB)
	0 °C to +50 °C, S/N > 16 dB	
	0 dB to –50 dB	< 0.1 dB ($\sigma = 0.04$ dB)
	–50 dB to –60 dB	< 0.15 dB ($\sigma = 0.05$ dB)
	–60 dB to –70 dB	< 0.2 dB ($\sigma = 0.07$ dB)
Linear level display	S/N > 16 dB, 0 dB to –70 dB	5 % of reference level
Total measurement uncertainty		
	signal level 0 dB to –70 dB below reference level, S/N > 20 dB, sweep time auto, sweep type = sweep, RF attenuation 10 dB, 20 dB, 30 dB, 40 dB, RF preamplifier = off, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C	
	9 kHz $\leq f < 10$ MHz	0.39 dB
	10 MHz $\leq f < 3.6$ GHz	0.28 dB
	3.6 GHz $\leq f < 7$ GHz	0.39 dB
	7 GHz $\leq f < 13.6$ GHz	1 dB
	13.6 GHz $\leq f < 30$ GHz	1.32 dB
	30 GHz $\leq f \leq 40$ GHz	1.65 dB

³ The setting of the reference level affects only the graphical representation of the measurement result on the display, not the measurement itself. Therefore, the reference level setting causes no additional uncertainty in measurement results.

Measurement speed

Max. sweep rate, manual operation		1 ms (1000/s) (nom.)
Max. sweep rate, remote operation ^{4,5}	trace average = on	0.9 ms (1100/s) (nom.)
Remote measurement and LAN transfer ⁴		2.8 ms (357/s) (nom.)
Marker peak search ⁴		1.3 ms (nom.)
Center frequency tune + sweep	$f \leq 7 \text{ GHz}$	15 ms (nom.)
+ sweep data transfer via remote control ⁴	$f > 7 \text{ GHz}$	28 ms (nom.)

Trigger functions

Trigger		
Trigger source		free run, video, external, IF power
Trigger source	signal analysis bandwidth > 40 MHz	free run, external
Trigger offset	span $\geq 10 \text{ Hz}$	31.25 ns to 30 s, min. resolution 31.25 ns (or 1 % of offset)
	span = 0 Hz	(–sweep time) to 30 s, min. resolution 31.25 ns (or 1 % of offset)
Max. deviation of trigger offset		$\pm(7.8125 \text{ ns} + (0.1 \% \times \text{trigger offset}))$
IF power trigger		
Sensitivity	min. signal power	–60 dBm + RF attenuation – RF preamplifier gain
	max. signal power	–10 dBm + RF attenuation – RF preamplifier gain
IF power trigger bandwidth	RBW > 500 kHz, swept	40 MHz (nom.)
	RBW > 20 kHz, FFT	
	RBW $\leq 500 \text{ kHz}$, swept	6 MHz (nom.)
	RBW $\leq 20 \text{ kHz}$, FFT	
Gated sweep		
Gate source		video, external, IF power
Gate delay		31.25 ns to 30 s, min. resolution 31.25 ns (or 1 % of delay)
Gate length		31.25 ns to 30 s, min. resolution 31.25 ns (or 1 % of gate length)
Max. deviation of gate length		$\pm(7.8125 \text{ ns} + (0.1 \% \times \text{gate length}))$

⁴ Measured with personal computer equipped with Intel® Core™2 Duo 2.13 GHz and Gbit LAN interface.

⁵ Measurement is performed with a sweep count of 1000. The indicated speed is the average speed of 1 sweep.

I/Q data

Interface		GPIO or LAN interface
Memory length		max. 200 Msample I and Q
Word length of I/Q samples	sampling rate > 64 MHz or number of samples > 100 Msample	18 bit
	otherwise	24 bit
Sampling rate	all models except R&S®FSV40, model .39	100 Hz to 45 MHz
	with R&S®FSV-B70 option	100 Hz to 128 MHz
	with R&S®FSV-B160 option	100 Hz to 400 MHz
	R&S®FSV40, model .39	100 Hz to 12.5 MHz
Max. signal analysis bandwidth (equalized)	$f \leq 7$ GHz	
	all models except R&S®FSV40, model .39	28 MHz
	with R&S®FSV-B70 option	40 MHz
	with R&S®FSV-B160 option	160 MHz
	R&S®FSV40, model .39	10 MHz

Signal analysis bandwidth ≤ 40 MHz ⁶

Amplitude flatness	$f \leq 7$ GHz	± 0.3 dB (nom.)
Deviation from linear phase	$f \leq 7$ GHz	$\pm 1^\circ$ (nom.)
Nonlinearity of displayed level		see section "Nonlinearity of displayed level"
Level measurement uncertainty (at center frequency)		see section "Total measurement uncertainty"
Displayed average noise level (at center frequency)		see section "Displayed average noise level"
ADC related third-order intermodulation distortion	$f \geq 100$ MHz two -30 dBm tones at input mixer within analysis bandwidth	-80 dBc (nom.)
Residual spurious response	RF attenuation 0 dB, $f \geq 100$ MHz	-90 dBm (nom.)
Other spurious responses		see section "Spurious responses"

Signal analysis bandwidth 40 MHz to 160 MHz ⁷

The specifications in this section apply for a maximum frequency of 7 GHz.

Amplitude flatness	RF attenuation ≥ 10 dB, RF preamplifier = off	
	$100 \text{ MHz} \leq f < 4 \text{ GHz}$	± 0.7 dB (nom.) ⁸
	$4 \text{ GHz} \leq f < 6 \text{ GHz}$	± 1.0 dB (nom.) ⁸
	$6 \text{ GHz} \leq f \leq 7 \text{ GHz}$	± 1.5 dB (nom.) ⁸
Deviation from linear phase	RF attenuation ≥ 10 dB, RF preamplifier = off	
	$100 \text{ MHz} \leq f < 4 \text{ GHz}$	$\pm 2^\circ$ (nom.) ⁹
	$4 \text{ GHz} \leq f < 6 \text{ GHz}$	$\pm 2.5^\circ$ (nom.) ⁹
	$6 \text{ GHz} \leq f \leq 7 \text{ GHz}$	$\pm 3^\circ$ (nom.) ⁹
Nonlinearity of displayed level	0 dB to -70 dB	< 0.15 dB (nom.)
Level measurement uncertainty (at center frequency)		add 0.2 dB (nom.) to the values in section "Total measurement uncertainty"
Displayed average noise level (at center frequency)		add 5 dB (nom.) to the values in section "Displayed average noise level"
ADC related third-order intermodulation distortion	$f \geq 100$ MHz two -30 dBm tones at input mixer within analysis bandwidth	-65 dBc (nom.)
Residual spurious response	RF attenuation 0 dB, $f \geq 100$ MHz	-90 dBm (nom.)
Image response	$f \geq 100$ MHz	-65 dBc (nom.)
ADC related spurious response	$f \geq 100$ MHz mixer level = -20 dBm reference level = signal level single tone within analysis bandwidth	-65 dBc (nom.)
Other spurious responses		see section "Spurious responses"

⁶ Requires R&S®FSV-B70 or R&S®FSV-B160 option.

⁷ Requires R&S®FSV-B160 option.

⁸ With R&S®FSV-B24 option installed. add 0.2 dB to the specifications.

⁹ With R&S®FSV-B24 option installed, add 1° to the specifications.

Inputs and outputs

RF input		
Impedance		50 Ω
Connector	R&S®FSV4, R&S®FSV7, R&S®FSV13 R&S®FSV30 R&S®FSV40	N female APC 3.5 mm/N female test port adapter 2.92 mm (K)/N female test port adapter
VSWR	RF attenuation ≥ 10 dB	
	10 MHz $\leq f < 3.6$ GHz	< 1.5 , 1.3 (typ.)
	3.6 GHz $\leq f < 20$ GHz	< 2 , 1.8 (typ.)
	20 GHz $\leq f < 27$ GHz	< 2.2 , 2 (typ.)
	27 GHz $\leq f < 30$ GHz	
	DC-coupled	< 2.2 , 2 (typ.)
	AC-coupled	2.5 (typ.)
	30 GHz $\leq f \leq 40$ GHz	
	DC-coupled	< 2.5 , 2.2 (typ.)
	AC-coupled	3 (typ.)
	RF attenuation < 10 dB, DC-coupled	
	10 MHz $\leq f < 7$ GHz	2 (typ.)
	7 GHz $\leq f < 30$ GHz	2.5 (typ.)
	30 GHz $\leq f \leq 40$ GHz	3 (typ.)
Setting range of attenuator	standard with R&S®FSV-B25 option	0 dB to 75 dB, in 5 dB steps 0 dB to 75 dB, in 1 dB steps
Setting range of electronic attenuator	with R&S®FSV-B25 option, $f \leq 7$ GHz	0 dB to 25 dB, in 1 dB steps
	with R&S®FSV-B25 option, $f > 7$ GHz	0 dB to 9 dB, in 1 dB steps
RF preamplifier gain	with R&S®FSV-B22 option	20 dB (nom.)
	with R&S®FSV-B24 option	
	$f \leq 7$ GHz	20 dB (nom.)
	$f > 7$ GHz	30 dB (nom.)

Probe power supply		
Supply voltages		+15 V DC, -12.6 V DC and ground, max. 150 mA (nom.)

Noise source drive		
Connector		BNC female
Output voltage		0 V/28 V, switchable, max. 100 mA (nom.)

Power sensor		
Connector		6-pin LEMOSA female for supported R&S®NRP-Zxx power sensors

USB interface		2 ports, type A plug, version 2.0
----------------------	--	-----------------------------------

Reference output		
Connector		BNC female
Impedance		50 Ω
Output frequency	internal reference	10 MHz
	external reference	same as reference input signal
Level		> 0 dBm (nom.)

Reference input		
Connector		BNC female
Impedance		50 Ω
Input frequency range		1 MHz $\leq f_{in} \leq 20$ MHz, in 100 kHz steps
Required level		> 0 dBm into 50 Ω

External trigger/gate input		
Connector		BNC female
Trigger voltage		0.5 V to 3.5 V
Input impedance		10 kΩ
IEC/IEEE bus control		
		interface in line with IEC 625-2 (IEEE 488.2)
Command set		SCPI 1997.0
Connector		24-pin Amphenol female
Interface functions		SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0
LAN interface		
		10/100/1000BaseT
Connector		RJ-45
External monitor		
Connector		VGA-compatible, 15-pin, mini D-Sub

General data

Display		
Resolution		21 cm LC TFT color display (8.4")
Pixel failure rate		800 × 600 pixel (SVGA resolution)
		$< 1 \times 10^{-5}$
Data storage		
Internal	standard	hard disk ≥ 40 Gbyte (nom.)
	with R&S®FSV-B18 option	solid-state drive ≥ 8 Gbyte (nom.)
External		supports USB-2.0-compatible memory devices
Environmental conditions		
Temperature	operating temperature range	+5 °C to +40 °C
	operating temperature range with R&S®FSV-B18 option	0 °C to +50 °C
	permissible temperature range	0 °C to +50 °C
	storage temperature range	-40 °C to +70 °C
Climatic loading		+40 °C at 90 % rel. humidity, in line with EN 60068-2-30
Mechanical resistance		
Vibration	sinusoidal	5 Hz to 55 Hz 0.15 mm constant amplitude (1.8 g at 55 Hz); 55 Hz to 150 Hz acceleration: 0.5 g constant; in line with EN 60068-2-6
	random	10 Hz to 300 Hz, acceleration 1.2 g (RMS), in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810E Method No. 516.4 Procedure I, MIL-PRF-28800F
EMC		
		in line with EMC Directive 2004/108/EC including: IEC/EN 61326-1 ^{10, 11} , IEC/EN 61326-2-1, CISPR 11/EN 55011 ¹⁰ , IEC/EN 61000-3-2, IEC/EN 61000-3-3
Recommended calibration interval		
		2 years ¹²
Power supply		
AC supply		100 V to 240 V, 3 A to 1.25 A; 50 Hz to 400 Hz, class of protection I in line with VDE 411
Power consumption	R&S®FSV4, R&S®FSV7	90 W (typ.), max. 180 W with all options
	R&S®FSV13, R&S®FSV30, R&S®FSV40	115 W (typ.), max. 180 W with all options
Safety		in line with EN 61010-1, IEC 61010-1, UL 61010-1, CAN/CSA-C22.2 No. 61010-1-4
Test mark		VDE, GS, CSA, CSA-NRTL
Dimensions and weight		
Dimensions (nom.)	W × H × D	412 mm × 197 mm × 417 mm (16.22 in × 7.76 in × 16.42 in)
Net weight without options (nom.)	R&S®FSV4, R&S®FSV7	9.5 kg (20.94 lb)
	R&S®FSV13	10.3 kg (22.7 lb)
	R&S®FSV30	10.7 kg (23.58 lb)
	R&S®FSV40	11.1 kg (24.46 lb)

¹⁰ Emission limits for class A equipment.¹¹ Immunity test requirement for industrial environment (EN 61326 table 2).¹² 2 years apply for instruments with order number 1321.3008.xx and serial numbers starting from:

R&S®FSV4: 101570, R&S®FSV7: 101640, R&S®FSV13: 101590, R&S®FSV30: 103190, R&S®FSV40: 101060, R&S®FSV40 Var.39: 101415.

To extend earlier instruments to a recommended calibration interval of 2 years please contact an R&S service center.

Options

R&S®FSV-B3 audio demodulator

Demodulation		
AF demodulation types		AM and FM
Audio output		loudspeaker and phone jack
Marker stop time in spectrum mode		100 ms to 60 s

AF output		
Connector		3.5 mm mini jack
Output impedance		10 Ω
Open-circuit voltage		up to 1.5 V, adjustable

R&S®FSV-B5 additional interfaces

User port		
Connector		9-pin D-Sub male
Output		TTL-compatible, 0 V/5 V, max. 15 mA
Input		TTL-compatible, max. 5 V

IF/video/demod out		
Connector		BNC female, 50 Ω

IF out		
Bandwidth		equal to RBW setting
IF frequency		32 MHz
Output level (gain versus RF input)	RF attenuation 0 dB, RF preamplifier = off, span = 0 Hz	0 dB (nom.)

Video out		
Bandwidth		equal to VBW setting
Output scaling	log. display scale	logarithmic
	lin. display scale	linear
Output level	center frequency > 10 MHz, span = 0 Hz, signal at reference level and center frequency	1 V (nom.), open circuit

Trigger out		
Connector		BNC female
Output		TTL-compatible, 0 V/5 V

USB interface		2 ports, type A plug, version 2.0
----------------------	--	-----------------------------------

R&S®FSV-B9 tracking generator

Frequency		
Frequency range	R&S®FSV4	100 kHz to 4 GHz
	R&S®FSV7, R&S®FSV13, R&S®FSV30, R&S®FSV40	100 kHz to 7 GHz
Frequency offset		
Setting range		±1 GHz
Setting resolution		1 Hz
Spectral purity		
SSB phase noise	frequency = 1000 MHz, carrier offset = 100 kHz	−90 dBc (1 Hz) (typ.)
Level		
Setting range	normal mode	−60 dBm to 0 dBm, in 0.1 dB steps
	with AM, I/Q	−60 dBm to −10 dBm, in 0.1 dB steps
Max. deviation of output level	frequency = 64 MHz, +20 °C to +30 °C, output level = −10 dBm, frequency offset = 0 Hz, modulation = off	< 1 dB
Frequency response	output level = −10 dBm, referenced to level at 64 MHz, 100 kHz ≤ f ≤ 7 GHz, frequency offset = 0 Hz, modulation = off	< 3 dB
Dynamic range		
	RBW = 1 kHz, f > 10 MHz	110 dB
Harmonics, non-harmonic spurious		
	output level = −10 dBm	−30 dBc
Modulation		
Modulation format	external	I/Q, AM, FM
AM	f > 10 MHz	
	modulation depth	0 % to 100 %
	modulation frequency range	0 Hz to 1 MHz
FM	f > 10 MHz	
	modulation depth	0 Hz to 10 MHz
	modulation frequency range	0 Hz to 10 kHz
RF output		
Connector		N female, 50 Ω
VSWR		1.3 (nom.)
TG I/AM IN		
Connector		BNC female, 50 Ω
Input voltage		1 V (pp)
TG Q/FM IN		
Connector		BNC female, 50 Ω
Input voltage		1 V (pp)

R&S®FSV-B10 external generator control

Interface		
IEC/IEEE bus control		24-pin Amphenol female
Aux control		9-pin D-Sub female
Supported signal generators		
		R&S®SGS100A, R&S®SMA100A, R&S®SMB100A, R&S®SMBV100A, R&S®SMC100A, R&S®SME, R&S®SMF100A, R&S®SMG, R&S®SMGL, R&S®SMGU, R&S®SMH, R&S®SMHU, R&S®SMIQ, R&S®SMJ100A, R&S®SML, R&S®SMP, R&S®SMR, R&S®SMT, R&S®SMU200A, R&S®SMV03, R&S®SMX, R&S®SMY

R&S®FSV-B17 digital baseband interface

I/Q data IN		
Connector		26-pin female Mini D Ribbon
Data lines	number of data lines (differential lines)	8
	bit rate (on each data line)	396 MHz to 600 MHz
	level	LVDS
Clock	clock rate	66 MHz to 100 MHz
	level	LVDS
Communications lines		bidirectional 2-wire interface
	level	3.3 V
I/Q data OUT		
Connector		26-pin female Mini D Ribbon
Data lines	number of data lines (differential lines)	8
	bit rate (on each data line)	600 MHz
	level	LVDS
Clock	clock rate	100 MHz
	level	LVDS
Communications lines		bidirectional 2-wire interface
	level	3.3 V

R&S®FSV-B21 LO/IF ports for external mixers (for R&S®FSV30 and R&S®FSV40 only)

LO signal		
Frequency range		7.73 GHz to 15.23 GHz
Level	+20 °C to +30 °C	+15.5 dBm ± 1 dB
	+5 °C to +40 °C	+15.5 dBm ± 3 dB

IF input		
IF frequency		729.9 MHz
Full-scale level	2-port mixer (LO output/IF input, front panel)	–20 dBm
	3-port mixer (IF input, front panel)	–20 dBm
Level uncertainty	IF input level –30 dBm, RBW 30 kHz, 2-port mixer, LO output/IF input (front panel)	
	+20 °C to +30 °C	< 1 dB
	+5 °C to +40 °C	< 3 dB
	IF input level –30 dBm, RBW 30 kHz, 3-port mixer, IF input (front panel)	
	+20 °C to +30 °C	< 1 dB
	+5 °C to +40 °C	< 3 dB

Inputs and outputs		
LO output/IF input		SMA female, 50 Ω
IF input		SMA female, 50 Ω

R&S®FSV-B30 DC power supply for 12 V supply voltage

Input voltage range		10 V to 15 V
Output voltage		230 V, 50 Hz
Input current	$V_{in} = 12 \text{ V}$, instrument without options, preset settings	
	R&S®FSV4, R&S®FSV7	10 A (typ.)
	R&S®FSV13, R&S®FSV30, R&S®FSV40	13 A (typ.)
Temperature	operating temperature range	0 °C to +40 °C
	storage temperature range	–30 °C to +70 °C
Dimensions	W × H × D	165 mm × 74 mm × 88 mm (6.5 in × 2.91 in × 3.46 in)
Net weight		1.1 kg (2.42 lb)

R&S®FSV-B32 Lithium-ion battery pack

Battery pack		
Output voltage		12 V (nom.)
Operating time	instrument without options, preset settings	2 h (nom.)
Charge time	with R&S®FSV-B34 charger, T = +25 °C	3.5 h (nom.)
Temperature	operating temperature range, discharge	0 °C to +50 °C
	operating temperature range, charge	0 °C to +45 °C
	storage temperature range	–20 °C to +60 °C ¹³
Dimensions	W × H × D	406 mm × 71 mm × 231 mm (16 in × 2.76 in × 9.09 in)
Net weight		3.4 kg (7.5 lb)

R&S®FSV-B34 charger for R&S®FSV-B32 battery pack

AC input voltage range		100 V to 240 V, ±10 % (nom.)
AC supply frequency		50 Hz to 60 Hz (nom.)
Power consumption		max. 300 W (nom.)
Dimensions	W × H × D	400 mm × 127 mm × 203 mm (15.75 in × 5 in × 8 in)
Net weight		3.1 kg (6.9 lb)

¹³ The battery packs should be stored in an environment with low humidity, free from corrosive gas at a recommended temperature range < +21 °C. Extended exposure to temperatures above 45°C could degrade battery performance and life.

Ordering information

Designation	Type	Order No.
Signal and Spectrum Analyzer	R&S®FSV4	1321.3008.04
Signal and Spectrum Analyzer	R&S®FSV7	1321.3008.07
Signal and Spectrum Analyzer	R&S®FSV13	1321.3008.13
Signal and Spectrum Analyzer	R&S®FSV30	1321.3008.30
Signal and Spectrum Analyzer	R&S®FSV40 ¹⁴	1321.3008.39
Signal and Spectrum Analyzer	R&S®FSV40	1321.3008.40
Accessories supplied		
Power cable, quick start guide and CD-ROM (with operating manual and service manual)		
R&S®FSV30: test port adapter with 3.5 mm female (1021.0512.00) and N female (1021.0535.00) connectors		
R&S®FSV40: test port adapter with 2.92 mm (K) female (1036.4790.00) and N female (1036.4777.00) connectors		

Options

Designation	Type	Order No.	Retrofittable	Remarks
Ruggedized Housing	R&S®FSV-B1	1310.9500.02	no	
Audio Demodulator	R&S®FSV-B3	1310.9516.02	yes	retrofit in service center
OCXO Reference Frequency	R&S®FSV-B4	1310.9522.02	yes	user-retrofittable
OCXO Extended Frequency Stability	R&S®FSV-B4	1310.9522.03	yes	user-retrofittable
Additional Interfaces	R&S®FSV-B5	1310.9539.02	yes	IF out, video out, AUX port, trigger out, 2 × USB
Tracking Generator (100 kHz to 7 GHz)	R&S®FSV-B9	1310.9545.02	yes	retrofit in service center
External Generator Control	R&S®FSV-B10	1310.9551.02	yes	retrofit in service center, excludes R&S®FSV-B160
Ultra-High Precision Frequency Reference	R&S®FSV-B14	1310.9980.02	yes	retrofit in service center, excludes R&S®FSV-B160
Digital Baseband Interface	R&S®FSV-B17	1310.9568.02	yes	user-retrofittable, for details ask service center, not available for R&S®FSV40, model .39
Solid-State Drive (removable hard drive)	R&S®FSV-B18	1310.9697.06	yes	user-retrofittable
Spare Hard Drive (removable hard drive)	R&S®FSV-B19	1310.9574.06	yes	user-retrofittable
LO/IF Ports for External Mixers	R&S®FSV-B21	1310.9597.02	no	
RF Preamplifier (9 kHz to 7 GHz)	R&S®FSV-B22	1310.9600.02	yes	user-retrofittable
RF Preamplifier (9 kHz to 13.6 GHz)	R&S®FSV-B24	1310.9616.13	no	
RF Preamplifier (9 kHz to 30 GHz)	R&S®FSV-B24	1310.9616.30	no	
RF Preamplifier (9 kHz to 40 GHz)	R&S®FSV-B24	1310.9616.40	no	
Electronic Attenuator, 1 dB steps	R&S®FSV-B25	1310.9622.02	yes	user-retrofittable
DC power supply for 12 V supply voltage	R&S®FSV-B30	1310.9897.02	yes	user-retrofittable
Lithium-Ion Battery Pack	R&S®FSV-B32	1321.3750.02	yes	user-retrofittable, requires R&S®FSV-B1
USB Mass Memory Write Protection	R&S®FS-B33	1309.5991.02	no	pre-installation ex factory
Lithium-Ion Battery Charger	R&S®FSV-B34	1321.3950.02	yes	user-retrofittable
40 MHz Analysis Bandwidth	R&S®FSV-B70	1310.9645.02	yes	user-retrofittable, for frequencies ≤ 7 GHz, not available for R&S®FSV40, model .39
160 MHz Analysis Bandwidth	R&S®FSV-B160	1311.2015.02	yes	for R&S®FSV4 and R&S®FSV7, excludes R&S®FSV-B10 and R&S®FSV-B14
160 MHz Analysis Bandwidth	R&S®FSV-B160	1311.2015.13	yes	for R&S®FSV13 for frequencies ≤ 7 GHz, excludes R&S®FSV-B10 and R&S®FSV-B14
160 MHz Analysis Bandwidth	R&S®FSV-B160	1311.2015.40	yes	for R&S®FSV30 and R&S®FSV40 for frequencies ≤ 7 GHz, excludes R&S®FSV-B10 and R&S®FSV-B14. not available for R&S®FSV40, model .39

¹⁴ Max. bandwidth 10 MHz.

Designation	Type	Order No.	Retrofittable	Remarks
Firmware/software				
Analog Modulation Analysis for AM, FM, ϕ M	R&S®FSV-K7	1310.8103.02		
FM Stereo Measurements	R&S®FSV-K7S	1310.8126.02		requires R&S®FSV-K7
Bluetooth®/EDR Measurements	R&S®FSV-K8	1310.8155.02		
Power Sensor Measurement with R&S®NRP Power Sensors	R&S®FSV-K9	1310.8203.02		supports R&S®NRP-Zxx power sensors
Analysis of GSM, EDGE and EDGE Evolution Signals	R&S®FSV-K10	1310.8055.02		
Spectrogram Measurements	R&S®FSV-K14	1310.8255.02		
Noise Figure and Gain Measurements	R&S®FSV-K30	1310.8355.02		
Phase Noise Measurement Application	R&S®FSV-K40	1310.8403.02		
EMI Measurement Application	R&S®FSV-K54	1310.0425.02		
Vector Signal Analysis	R&S®FSV-K70	1310.8455.02		
Analysis of 3GPP FDD Base Station Signals incl. HSPA+	R&S®FSV-K72	1310.8503.02		
3GPP FDD UE Analysis incl. HSPA+	R&S®FSV-K73	1310.8555.02		
3GPP TD-SCDMA BTS Measurements	R&S®FSV-K76	1310.8603.02		
TD-SCDMA UE Measurements	R&S®FSV-K77	1310.8655.02		
Analysis of CDMA2000® Base Station Signals	R&S®FSV-K82	1310.8703.02		
CDMA2000® MS Measurements	R&S®FSV-K83	1310.8755.02		
Analysis of 1xEV-DO Base Station Signals	R&S®FSV-K84	1310.8803.02		
1xEV-DO MS Measurements	R&S®FSV-K85	1310.8778.02		
Analysis of WLAN 802.11a, b, g, j Signals	R&S®FSV-K91	1310.8903.02		not available for R&S®FSV40, model .39
WLAN 802.11ac Measurement Application	R&S®FSV-K91AC	1310.8926.02		requires R&S®FSV-B160, not available for R&S®FSV40, model .39
Extension of R&S®FSV-K91 to 802.11n	R&S®FSV-K91n	1310.9468.02		requires R&S®FSV-B70, not available for R&S®FSV40, model .39
Analysis of WiMAX™ 802.16 SISO Signals	R&S®FSV-K93	1310.8955.02		not available for R&S®FSV40, model .39
Analysis of EUTRA/LTE FDD Downlink Signals	R&S®FSV-K100	1310.9051.02		not available for R&S®FSV40, model .39
Analysis of EUTRA/LTE FDD Uplink Signals	R&S®FSV-K101	1310.9100.02		not available for R&S®FSV40, model .39
EUTRA/LTE Downlink MIMO Measurements	R&S®FSV-K102	1310.9151.02		requires R&S®FSV-K100 or R&S®FSV-K104, not available for R&S®FSV40, model .39
Analysis of EUTRA/LTE TDD Downlink Signals	R&S®FSV-K104	1309.9774.02		not available for R&S®FSV40, model .39
Analysis of EUTRA/LTE TDD Uplink Signals	R&S®FSV-K105	1309.9780.02		not available for R&S®FSV40, model .39

Upgrade Kits for R&S®FSV 1307.9002.xx

Designation	Type	Order No.	Retrofittable	Remarks
Windows 7 Upgrade for R&S®FSV with FMR7 CPU board and 2 GB RAM	R&S®FSV-U1	1164.6094.02	yes	retrofit in service center, for details contact your local Rohde & Schwarz service center
Windows 7 Upgrade for R&S®FSV with FMR9 CPU board and 2 GB RAM	R&S®FSV-U2	1321.3572.02	yes	retrofit in service center, for details contact your local Rohde & Schwarz service center
Windows 7 Upgrade for R&S®FSV with FMR9 CPU board and 4 GB RAM	R&S®FSV-U3	1321.3589.02	yes	user-retrofittable ¹⁵

¹⁵ The upgrade kit R&S®FSV-U3 is suitable for instruments starting from the following serial numbers:

R&S®FSV3: 102116, R&S®FSV7: 102187, R&S®FSV13: 101181, R&S®FSV30: 101391, R&S®FSV40: 100983, R&S®FSV40, model.39: 101351.

For instruments with lower serial numbers contact your local Rohde & Schwarz service center.

Recommended extras

Designation	Type	Order No.
Headphones		0708.9010.00
IEC/IEEE Bus Cable, length: 1 m	R&S®PCK	0292.2013.10
IEC/IEEE Bus Cable, length: 2 m	R&S®PCK	0292.2013.20
19" Rack Adapter (not for R&S®FSV-B1)	R&S®ZZA-478	1096.3248.00
19" Rack Adapter, pre-installed ex factory (not for R&S®FSV-B1)	R&S®FSV-B478	1310.9951.02
Soft Carrying Case (gray)	R&S®ZZT-473	1109.5048.00
Matching pads, 50/75 Ω		
L Section, matching at both ends	R&S®RAM	0358.5414.02
Series Resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S®RAZ	0358.5714.02
SWR bridges, 50 Ω		
SWR Bridge, 5 MHz to 3 GHz	R&S®ZRB2	0373.9017.5x
SWR Bridge, 40 kHz to 4 GHz	R&S®ZRC	1039.9492.5x
High-power attenuators		
Attenuator 100 W, 3/6/10/20/30 dB, 1 GHz	R&S®RBU100	1073.8495.xx (xx = 03/06/10/20/30)
Attenuator 50 W, 3/6/10/20/30 dB, 2 GHz	R&S®RBU50	1073.8695.xx (xx = 03/06/10/20/30)
Attenuator 50 W, 20 dB, 6 GHz	R&S®RDL50	1035.1700.52
Connectors and cables		
N-type Adapter for R&S®RT-Zx probes	R&S®RT-ZA9	1417.0909.02
Probe Power Connector, 3-pin		1065.9480.00
LVDS Cable for connecting digital baseband interfaces	R&S®SMU-Z6	1415.0201.02
DC blocks		
DC Block, 10 kHz to 18 GHz (type N)	R&S®FSE-Z4	1084.7443.02
External harmonic mixers (for R&S®FSV30/FSV40 with R&S®FSV-B21 option)		
Harmonic Mixer 40 GHz to 60 GHz	R&S®FS-Z60	1089.0799.02
Harmonic Mixer 50 GHz to 75 GHz	R&S®FS-Z75	1089.0847.02
Harmonic Mixer 60 GHz to 90 GHz	R&S®FS-Z90	1089.0899.02
Harmonic Mixer 75 GHz to 110 GHz	R&S®FS-Z110	1089.0947.04
For R&S®FSV30 only		
Test Port Adapter, N male		1021.0541.00
Test Port Adapter, 3.5 mm male		1021.0529.00
Microwave Measurement Cable with test port adapter set (N male and 3.5 mm male)	R&S®FSE-Z15	1046.2002.02
For R&S®FSV40 only		
Test Port Adapter, N male		1036.4783.00
Test Port Adapter, K male		1036.4802.00
Test Port Adapter, 2.4 mm female	R&S®FSE-Z5	1088.1627.02

Power sensors supported by the R&S®FSV-K9 option ¹⁶

Designation	Type	Order No.
Universal Power Sensor, 10 MHz to 8 GHz, 200 mW	R&S®NRP-Z11	1138.3004.02
Universal Power Sensor, 10 MHz to 18 GHz, 200 mW	R&S®NRP-Z21	1137.6000.02
Universal Power Sensor, 10 MHz to 18 GHz, 2 W	R&S®NRP-Z22	1137.7506.02
Universal Power Sensor, 10 MHz to 18 GHz, 15 W	R&S®NRP-Z23	1137.8002.02
Universal Power Sensor, 10 MHz to 18 GHz, 30 W	R&S®NRP-Z24	1137.8502.02
Power Sensor Module with Power Splitter DC to 18 GHz, 500 mW	R&S®NRP-Z27	1169.4102.02
Power Sensor Module with Power Splitter DC to 26.5 GHz, 500 mW	R&S®NRP-Z37	1169.3206.02
Thermal Power Sensor, 0 Hz to 18 GHz, 100 mW	R&S®NRP-Z51	1138.0005.02
Thermal Power Sensor, 0 Hz to 40 GHz, 100 mW	R&S®NRP-Z55	1138.2008.02
Thermal Power Sensor, 0 Hz to 50 GHz, 100 mW	R&S®NRP-Z56	1171.8201.02
Thermal Power Sensor, 0 Hz to 67 GHz, 100 mW	R&S®NRP-Z57	1171.8401.02
Wideband Power Sensor, 50 MHz to 18 GHz, 100 mW	R&S®NRP-Z81	1137.9009.02
Wideband Power Sensor, 50 MHz to 40 GHz, 100 mW	R&S®NRP-Z85	1411.7501.02
Average Power Sensor, 9 kHz to 6 GHz, 200 mW	R&S®NRP-Z91	1168.8004.02
Average Power Sensor, 9 kHz to 6 GHz, 2 W	R&S®NRP-Z92	1171.7005.02
Two-path diode power sensor, 10 MHz to 8 GHz, 100 mW	R&S®NRP-Z211	1417.0409.02
Two-path diode power sensor, 10 MHz to 18 GHz, 100 mW	R&S®NRP-Z221	1417.0309.02

Service options		
Extended Warranty, one year	R&S®WE1	Please contact your local Rohde & Schwarz sales office.
Extended Warranty, two years	R&S®WE2	
Extended Warranty, three years	R&S®WE3	
Extended Warranty, four years	R&S®WE4	
Extended Warranty with Calibration Coverage, one year	R&S®CW1	
Extended Warranty with Calibration Coverage, two years	R&S®CW2	
Extended Warranty with Calibration Coverage, three years	R&S®CW3	
Extended Warranty with Calibration Coverage, four years	R&S®CW4	

Extended warranty with a term of one to four years (WE1 to WE4)

Repairs carried out during the contract term are free of charge ¹⁷. Necessary calibration and adjustments carried out during repairs are also covered. Simply contact the forwarding agent we name; your product will be picked up free of charge and returned to you in top condition a couple of days later.

Extended warranty with calibration (CW1 to CW4)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs ¹⁷ and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Rohde & Schwarz is under license.

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA-USA).

"WiMAX Forum" is a registered trademark of the WiMAX Forum. "WiMAX", the WiMAX Forum logo, "WiMAX Forum Certified", and the WiMAX Forum Certified logo are trademarks of the WiMAX Forum.

¹⁶ For average power measurement only.

¹⁷ Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.

Service that adds value

- ▮ Worldwide
- ▮ Local and personalized
- ▮ Customized and flexible
- ▮ Uncompromising quality
- ▮ Long-term dependability

About Rohde & Schwarz

The Rohde & Schwarz electronics group is a leading supplier of solutions in the fields of test and measurement, broadcast and media, secure communications, cyber-security, and radiomonitoring and radiolocation. Founded more than 80 years ago, this independent global company has an extensive sales network and is present in more than 70 countries. The company is headquartered in Munich, Germany.

Sustainable product design

- ▮ Environmental compatibility and eco-footprint
- ▮ Energy efficiency and low emissions
- ▮ Longevity and optimized total cost of ownership

Certified Quality Management

ISO 9001

Certified Environmental Management

ISO 14001

Rohde & Schwarz GmbH & Co. KG

www.rohde-schwarz.com

Regional contact

- ▮ Europe, Africa, Middle East | +49 89 4129 12345
customersupport@rohde-schwarz.com
- ▮ North America | 1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- ▮ Latin America | +1 410 910 79 88
customersupport.la@rohde-schwarz.com
- ▮ Asia Pacific | +65 65 13 04 88
customersupport.asia@rohde-schwarz.com
- ▮ China | +86 800 810 82 28 | +86 400 650 58 96
customersupport.china@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners

PD 3606.7982.22 | Version 10.01 | February 2015 (as)

R&S®FSV Signal and Spectrum Analyzer

Data without tolerance limits is not binding | Subject to change

© 2013 - 2015 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



3606798222