


MODEL 25S1G4A M1, M2, M3, M4 25 WATTS CW 0.8 – 4.2 GHz

The Model 25S1G4A is a solid state, self-contained, air-cooled, broadband amplifier designed for applications where instantaneous bandwidth, high gain and linearity are required. Housed in a stylish contemporary cabinet, the unit is designed for benchtop use, but can be removed from the cabinet for immediate equipment rack mounting.

The 25S1G4A, when used with a sweep generator, will provide a minimum of 25 watts of RF power. Included is a front panel gain control which permits the operator to conveniently set the desired output level. The 25S1G4A is protected from RF input overdrive by an RF input leveling circuit which controls the RF input level to the RF amplifier first stage when the RF input level is increased above 0 dBm. The RF amplifier stages are protected from over-temperature by removing the DC voltage to them if an over-temperature condition occurs due to cooling blockage or fan failure. There is a digital display on the front panel to indicate the operate status and fault conditions if an over-temperature or power supply fault has occurred. The unit can be returned to operate when the condition has been cleared. The 25S1G4A digital panel provides control of all amplifier functions both locally and remotely via IEEE-488 (GPIB) or RS-232 interfaces.

The low level of spurious signals and linearity of the Model 25S1G4A make it ideal for use as a driver amplifier in testing wireless and communication components and subsystems. It can be used as a test instrument covering multiple frequency bands and is suitable for a variety of communication technologies such as CDMA, W-CDMA, TDMA, GSM etc. It is also suitable for EMC Test applications where undistorted modulation envelopes are desired.

25S1G4A Typical Performance

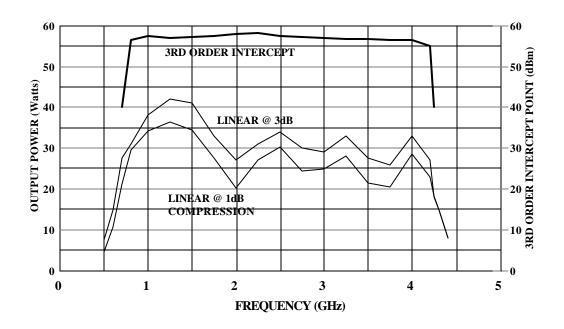

## SPECIFICATIONS Model 25S1G4A

INPUT FOR RATED OUTPUT 1.0 MILLIWATT MAXIMUM    100% of rated power without foldback. Will operate without damage or oscillation with any magnitude and phase of source and load impedance. (See Application Note #27)    POWER OUTPUT @ 3dB COMPRESSION   32 watts   MODULATION CAPABILITY	RATED POWER OUTPUT 25 WATTS MINIMUM	MISMATCH TOLERANCE		
Nominal 32 watts Minimum 25 watts Minimum 25 watts Minimum 25 watts Minimum 25 watts Minimum 27 watts Minimum 20 watts Minus 20 dbc Max at 20 watts Minus 20 dbc Max at 20 watts Minus 73 dbc Typ.  GAIN (at maximum setting) 44 dB minimum MINUS Minus 73 dbc Typ.  GAIN ADJUSTMENT (Continuous Range) 10 dB minimum 30/60 Hz, single phase (4096 steps remote)  NEWR 2.0:1 maximum MODULATION CAPABILITY Will faithfully reproduce AM, FM, or pulse Modulation appearing on the input signal  THIRD ORDER INTERCEPT See chart. The third order intercept points for this chart have been determined using two tones spaced 1 MHz apart. This is typical for W-CDMA systems. Closer tone spacing such as 60 kHz generally provides about a 1db to 3db improvement in the IP.  HARMONIC DISTORTION Minus 20 dbc max at 20 watts  SPURIOUS Minus 73 dbc Typ. PRIMARY POWER (Selected Automatically) 90-132, 180-264 VAC  MODULATION CAPABILITY  Sechart. The third order intercept points for this chart have been determined using two tones spaced 1 MHz apart. This is typical for W-CDMA systems. Closer tone spacing such as 60 kHz generally provides about a 1db to 3db improvement in the IP.  HARMONIC DISTORTION Minus 20 dbc max at 20 watts SPURIOUS Minus 73 dbc Typ. PRIMARY POWER Selected Automatically) 90-132, 180-264 VAC  CONNECTORS RF Type N female REMOTE INTERFACES  IEEE 488 24 pin female RS-232 9 pin Subminiature D (GONLING Forced air (self contained fans)		operate without damage or oscillation with any magnitude and phase of source and load		
POWER OUTPUT @ 1dB COMPRESSION Nominal		MODULATION CAPABILITY		
Nominal 27 watts Minimum 20 watts Minimum 20 watts Minimum 20 watts  FLATNESS ±1.5 dB typical ±2.0 dB maximum  ±2.0 dB maximum  ±2.0 dB maximum  ### ARMONIC DISTORTION   Minus 20 dbc	Minimum 25 watts			
FREQUENCY RESPONSE 0.8 – 4.2 GHz instantaneously  SPURIOUS Minus 73 dbc Typ.  GAIN (at maximum setting) 44 dB minimum  PHASE LINEARITY ±1.0 deg/100 MHz, Typ  PRIMARY POWER (Selected Automatically)  90-132, 180-264 VAC  10 dB minimum  4096 steps remote)  INPUT IMPEDANCE 50 ohms VSWR 2.0:1 maximum  OUTPUT IMPEDANCE 50 ohms, nominal  CONNECTORS  RF Type N female  REMOTE INTERFACES  IEEE-488 24 pin female  RS-232 9 pin Subminiature D (female)  SAFETY INTERLOCK 15 pin Subminiature D  COOLING Forced air (self contained fans)	Nominal         27 watts           Minimum         20 watts           FLATNESS         ±1.5 dB typical	See chart. The third order intercept points for this chart have been determined using two tones spaced 1 MHz apart. This is typical for W-CDMA systems. Closer tone spacing such as 60 kHz generally provides about a 1db to 3db		
GAIN (at maximum setting)	~			
GAIN ADJUSTMENT	GAIN (at maximum setting) 44 dB minimum			
INPUT IMPEDANCE	10 dB minimum	90-132, 180-264 VAC 50/60 Hz, single phase		
SAFETY INTERLOCK		RFType N female REMOTE INTERFACES		
COOLING Forced air (self contained fans)	OUTPUT IMPEDANCE 50 ohms, nominal			
		SAFETY INTERLOCK15 pin Subminiature D		
MODEL CONFIGURATIONS				
	MODEL CONF	IGURATIONS		

MODEL NUMBER	RF INPUT	RF OUTPUT	WEIGHT	SIZE (W x H x D)
25S1G4A	Type N female on front panel	Type N female on front panel	35.0 kg (77.0 lb)	50.3 x 20.3 x 54.6 cm 19.8 x 8.0 x 21.5 in
25S1G4AM1	Type N female on rear panel	Type N female on rear panel	35.0 kg (77.0 lb)	50.3 x 20.3 x 54.6 cm 19.8 x 8.0 x 21.5 in
25S1G4AM2	Same as 25S1G4A with enclosure removed for rack mounting		25.6 kg (57.0 lb)	48.3 x 17.8 x 54.6 cm 19.0 x 7.0 x 21.5 in
25S1G4AM3	Same as 25S1G4AM1 with enclosure removed for rack mounting		25.6 kg (57.0 lb)	48.3 x 17.8 x 54.6 cm 19.0 x 7.0 x 21.5 in
25S1G4AM4	Type N female on front panel	4 SMA females on rear panel	35.0 kg (77.0 lb)	50.3 x 20.3 x 54.6 cm 19.8 x 8.0 x 21.5 in
	Single RF input, Four independen out of 6 wa			