

ATS-535 THERMOSTREAM®

DATASHEET AND SPECIFICATIONS

-60° to +225°C



Designed for **50/60Hz operation**, this Advanced Temperature Source is for fast and precise thermal conditioning of components, parts, hybrids, modules, subassemblies, and printed circuit boards. Capable of ultra-low temperatures **without** the use of Liquid Nitrogen (LN₂), Liquid Carbon Dioxide (LCO₂), or compressed air.

PERFORMANCE:

Temperature Range*

-60 to +225°C

No LN₂ or LCO₂ Required

Transition Rate*

-40 to +125°C, <12 seconds

+125 to -40°C, <40 seconds

System Airflow Output*

5scfm (2.4 l/s) Fixed Flow Rate

*Under nominal operating conditions.

TEMPERATURE CONTROL:

Temperature Display & Resolution

+/- 0.1°C

Temperature Accuracy


1.0°C (when calibrated against NIST standard)

DUT Temperature Control

proprietary control algorithm enables DUT temperature to be directly controlled

DUT Sensor Ports

thermocouples: type T & K

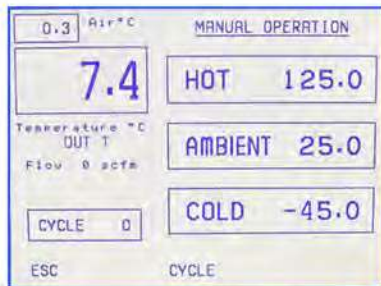

OPERATOR SCREEN



PROGRAM SCREEN

FEATURES:

► Frost Free Feature

dry air purge for tester interface, prevents condensation: 0.5 to 3scfm (0.25 to 1.5 l/s)

► ECO Friendly Feature

Heat Only Mode

reduces power usage when cold temperatures are not used

► Thermal Cap

5.5 inch ID Glass Thermal Cap to enclose your test subject

► Fully Adjustable Thermal Head

can be mounted on either side of unit

► Internal Air Compressor

supplies clean, dry air to the system without the need for facility air

► Local & Remote Operations

► LabView™ drivers


► IEEE-488, RS232 ports

► customizable and savable test setups

► Program & Datalog Storage

► User Defined Temperature Limits



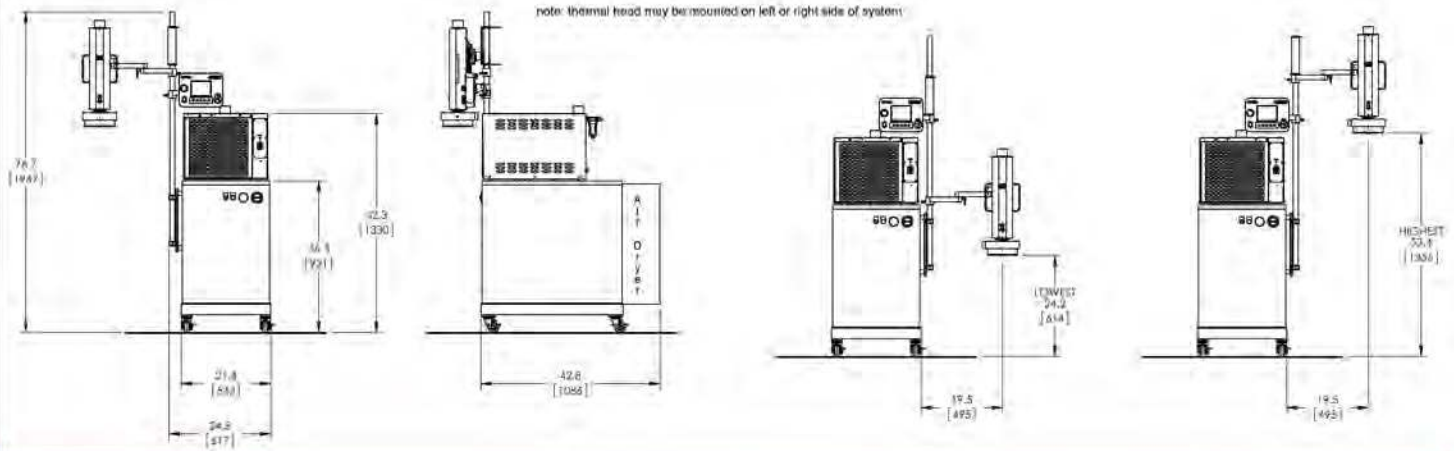

Weights and Dimensions

Dimensions

194.7cm (76.7 inches) X 61.7cm (24.3 inches) X 108.6cm (42.8 inches)

Weight

249.5 Kg (550 lbs.)

Noise Level

< 70dBA (< 60dBA with remote compressor upgrade kit, CS210240)

Service and Safety

Refrigerants

HCFC and CFC-free, non-toxic, non-flammable

Serviceability

Auto-diagnostics and field replaceable modules

Over Temperature Protection

+230°C (factory set): Operator can set high and low air temperature limits

Facility Requirements

Power²

Chiller Power: 220 ±10% VAC, 50/60Hz, 16amp
 Compressor Power: 220 ±10% VAC, 50/60Hz, 30amp

Operating Environment³

Operating Temperature

+20° to +28°C; +23°C nominal

Humidity

0 to 60%; 45% nominal

² System is configured for operation within voltages listed above. Please specify power configuration with order.

inTEST Thermal Solutions
 41 Hampden Road
 Mansfield, MA 02048
 TEL: 1.781.688.2300
 www.inTESTthermal.com

ISO 9001 Certified

