


Part No.

DCAP-2MSA

Ralston DCAP Pressure Test Pump with 1/4" Male NPT Gauge Connection

650 psi (45 bar) pneumatic hand pump, 3ft hose, 1/4" Male NPT process conn, 3 ft hose

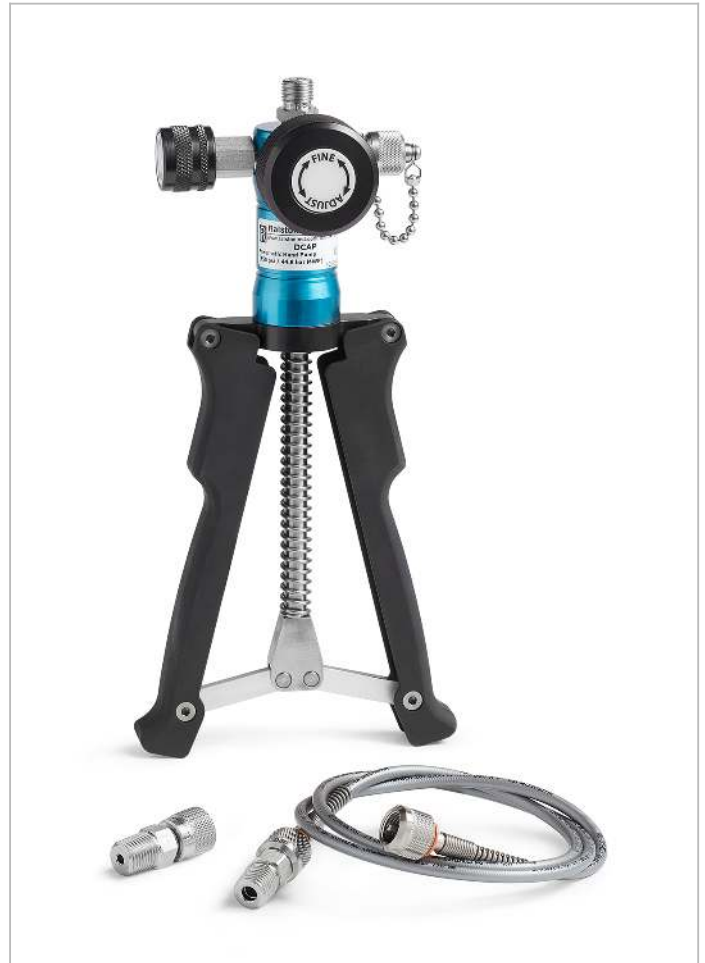

DCAP-2MSA

Included Items

- Hand Pump - DCAP Pneumatic Hand Pump (DCAP)
- Reference Connection - 1/4" male NPT x female Quick-test, no check-valve, S.S. (QTHA-2MSA)
- Process Connection - 1/4" male NPT x male Quick-test, no check-valve, S.S. (QTHA-2MS0)
- Hose - Quick-test 6900 psi hose, S.S. hose ends, 3 ft (92 cm) long (QSQS-HOS-3ft)

Specs/Attributes

Country of origin	USA
Hose 1	Quick-test Hose, Stainless Steel ends, 3ft / 0.9m long
Pressure Reference	None
Process Connection	1/4" Male NPT
Reference Connection	1/4" Male NPT
Fine Adjustment Resolution	0.00 PSI / 0.01 mbar / 0.00 kPa
Materials	Anodized Aluminum, Stainless Steel
Max Pressure	650 PSI / 45 bar / 4.50 MPa
Max Operating Temperature	130 °F / 54 °C

Specs/Attributes

Min Operating Temperature	0 °F / -18 °C
Seal Materials	Buna-N, Delrin, Teflon
Weight	1.75 lbs / 795 grams
Dimensions	H: 3.53 in (8.97 cm) x W: 4.93 in (12.52 cm) x D: 10.52 in (26.72 cm)

Hand Pump DCAP

Fine Adjustment Resolution	0.00 PSI / 0.01 mbar / 0.00 kPa
Piston Displacement	.67 Cu In
Media Compatibility	Air, Inert Gas, Natural Gas
Burst Pressure	2600 PSI / 180 bar / 18 MPa
Fluid Media	Air
Materials	Anodized Aluminum, Brass, Stainless Steel
Max Pressure	650 PSI / 45 bar / 4.50 MPa
Max Operating Temperature	140 °F / 60 °C
Country of origin	USA
Min Operating Temperature	0 °F / -18 °C
Seal Materials	Buna-N, Delrin
Harmonized Code	8414.20.0000
Outlet Port	Male Quick-test, Male Quick-test with cap and chain
Weight	1.75 lbs / 795 grams
Dimensions	H: 5 in (12.7 cm) x W: 3 in (7.62 cm) x D: 10.5 in (26.67 cm)

Reference Connection QTHA-2MSA

Country of origin	USA
Has Check Valve	No
Materials	Stainless Steel
Max Operating Temperature	225 °F / 105 °C
Max Pressure	5000 PSI / 350 bar / 35 MPa
Max Vacuum	0.00 InHg / 0.0 kPa
Wrench Size	9/16 In 15 mm
Connector End 1	1/4" Male NPT (ASME B1.20.1)
Connector End 2	Female Quick-test
Weight	1.54 oz / 44 grams
Dimensions	H: 1.68 in (4.27 cm) x W: 0.7 in (1.78 cm) x D: 0.7 in (1.78 cm)

Process Connection QTHA-2MS0

Country of origin	USA
-------------------	-----

Process Connection QTHA-2MS0

Has Check Valve	No
Materials	Stainless Steel
Max Operating Temperature	225 °F / 105 °C
Max Pressure	5000 PSI / 350 bar / 35 MPa
Max Vacuum	0.00 InHg / 0.0 kPa
Min Operating Temperature	0 °F / -18 °C
Seal Materials	Buna-N
Wrench Size	9/16 In 15 mm
Connector End 1	1/4" Male NPT (ASME B1.20.1)
Connector End 2	Male Quick-test
Weight	1.01 oz / 29 grams
Dimensions	H: 1.29 in (3.28 cm) x W: 0.56 in (1.42 cm) x D: 0.56 in (1.42 cm)

Hose QSQS-HOS-3ft

Burst Pressure	27000 PSI / 1860 bar / 185 MPa
Color	Silver
Country of origin	USA
Fluid Media	Air, Inert Gas, Natural Gas, Petroleum Based Oil, Water
Hose Length	3ft / 0.91 m
Inner Diameter	0.08 In / 3.00 mm
Length	3 ft / 92 cm
Materials	Stainless Steel
Max Operating Temperature	140 °F / 60 °C
Max Pressure	6900 PSI / 475 bar / 48 MPa
Max Vacuum	-30.00 InHg / -101.6 kPa
Media Compatibility	Air, Inert Gas, Natural Gas, Petroleum Based Oil, Water
Min Operating Temperature	-40 °F / -40 °C
Minimum Bend Radius	1.00 In / 26 mm
Outer Diameter	0.20 In / 6.00 mm
Type	QT
Weight	2.48 oz / 70 grams