



Models 9354-1 and 9354-2 Transient Generators
 for susceptibility tests MIL-STD-461E/F CS116 and other specifications

**DESCRIPTION****APPLICATION**

The **Solar Model 9354-1 and 9354-2 Transient Generators** were especially designed for the performance of a variety of pulse susceptibility tests on subsystems and/or equipment, in accordance with MIL-STD-461E/F, Method CS116; also capable of limited testing for RTCA DO-160D, Section 22.

DESCRIPTION

The **Model 9354-1 and 9354-2 Transient Generators** provide nine selectable waveforms, including six damped sinusoidal pulses (10 kHz, 100 kHz, 1 MHz, 10 MHz, 30 MHz, and 100 MHz) and three double exponential pulses (6.4 μ S, 70 μ S, 500 μ S on **Model 9354-1**. The **Model 9354-2** also has three double exponential pulses (6.4 μ S, 70 μ S, and 120 μ S).

Auto pulsing of the sinusoidal repetition rate is internally adjusted from 0.5 to 1.0 pulse per second. A front panel-mounted pushbutton can be used to manually trigger single pulses. The peak amplitude of the selected output pulse is adjustable as a percentage of the charge voltage.

The six damped sinusoidal waveforms were designed to meet the requirements of MIL-STD-461E/F, Method CS116. Continuous tunable frequencies can be obtained by the use of the optional variable frequency modules.

The 1 MHz, 10 MHz, and the three double exponential pulses were designed to provide pre-compliance testing of RTCA DO-160D, Section 22. Table 2 lists the test levels that can be achieved from the **Models 9354-1 and 9354-2**.

FEATURES

- Panel-mounted digital voltmeter monitors the adjusted open circuit discharge voltage
- Pulse rates up to one pulse per second maximum (factory adjusted)
- Single pulse feature enables controlled isolation of transient effects
- Output voltage adjustable from 25% to 100% of selected discharge voltage

**SPECIFICATIONS**

Dimensions: 17.25" wide x 8.75" high x 13" deep (43.5 cm x 22.2 cm x 33.0 cm)
Weight: 55.0 pounds. (25 kg)

TABLE 1 – DAMPED SINUSOID PULSES

10 kHz

Open circuit voltage 30 V

	Calculated short circuit current	120 A
	Source impedance	<0.25 Ω
100 kHz	Open circuit voltage	300 V
	Calculated short circuit current	120 A
	Source impedance	<2.5 Ω
1 MHz	Open circuit voltage	3200 V
	Calculated short circuit current	128 A
	Source impedance	<25 Ω
10 MHz	Open circuit voltage	3200 V
	Calculated short circuit current	128 A
	Source impedance	<25 Ω
30 MHz	Open circuit voltage	1000 V
	Calculated short circuit current	20 A
	Source impedance	<50 Ω
100 MHz	Open circuit voltage	300 V
	Calculated short circuit current	6 A
	Source impedance	<50 Ω

NOTE: Measurement of short circuit currents are limited by the X_L of the circuit. All values are calculated.

TABLE 2 – DO-160D TEST LEVELS POSSIBLE FROM MODEL 9354-1 AND 9354-2 APPLICATIONS		
Waveform	Pin injection	Cable bundle injection
1 (70 μ S)	no requirement	level 1 - 4
2 (6.4 μ S)	no requirement	level 1 - 4
3A (1 MHz)	level 1 - 5	level 1 - 4
3B (10 MHz)	no requirement	level 1 - 4
4 (70 μ S)	level 1 - 5	level 1 - 4
5A (120 μ S)*	level 1 - 4	level 1 - 3
5B (500 μ S)*	level 1 - 4	level 1 - 3

* **NOTE:** Waveform 5A available in Model 9354-2 only. Waveform 5B available in Model 9354-1 only.

TABLE 3 – DOUBLE EXPONENTIAL PULSES		
6.4 μS	Rise time	100 nS
	Open circuit voltage	1600 V
	Calculated short circuit current	800 A
	Source impedance	<2.0 Ω
70.0 μS	Rise time	6.4 μ S
	Open circuit voltage	1600 V
	Calculated short circuit current	800 A
	Source impedance	<2.0 Ω
500 μS (9354-1)	Rise time	50 μ S
	Open circuit voltage	1600 V
	Calculated short circuit current	400 A
	Source impedance	<4.0 Ω
120 μS (9354-2)	Rise time	40 μ S
	Open circuit voltage	750 V
	Calculated short circuit current	750 A
	Source impedance	1.0 Ω

NOTE: Measurement of short circuit currents are limited by the X_L of the circuit. All values are calculated.

FIGURES



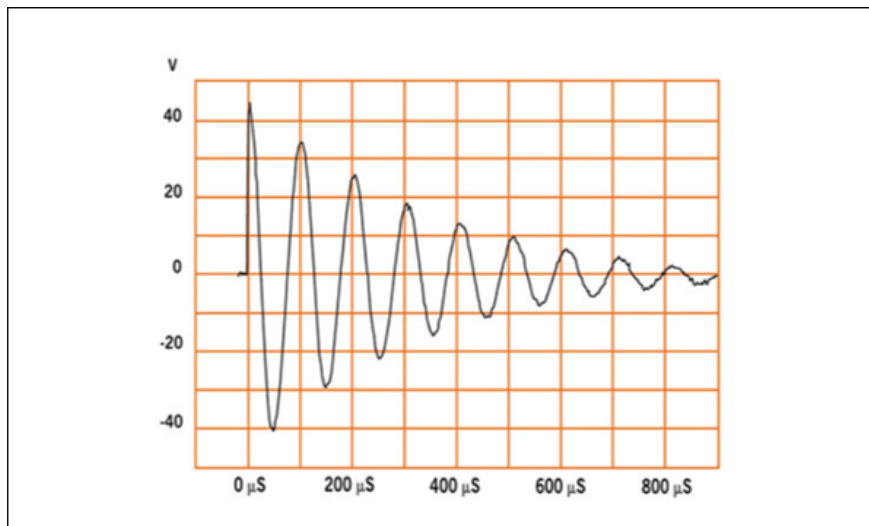


FIG. 1 – DAMPED SINUSOIDAL PULSE, (10 kHz) INTO AN OPEN CIRCUIT

solar-emc.com

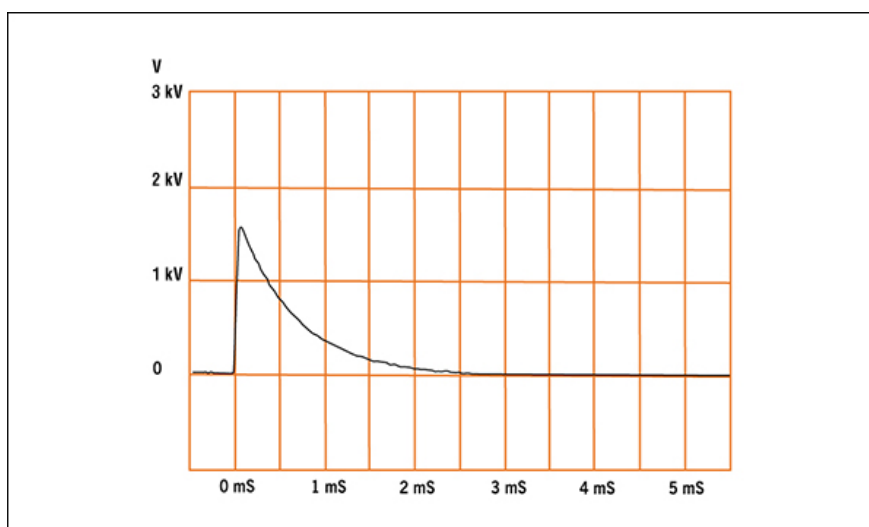


FIG. 2 – DOUBLE EXPONENTIAL PULSE INTO AN OPEN CIRCUIT

solar-emc.com

USEFUL ACCESSORIES



Variable Frequency Modules

Provide tunable frequencies for injection of damped sinusoidal waveforms from 10 kHz to 100 MHz when used with **Model 9354-1** or **Model 9354-2**. Five individual modules waveforms cover the entire frequency range required by MIL-STD-461E/F. Detailed information is provided on the **Solar Type 9554-() Variable Frequency Modules** page.

Solar Type 9335-2 Multiple Impedance Coupling Clamp

An inductive injection device that provides voltage and current transfer of 1:1, 1:1.5 and 1:3 voltage step-up (current step-down) as well as 2:1 voltage step-down (current step-up). For maximum power transfer, these ratios are selected by connecting to one of the four BNC connectors. This device, through its various connector ports, provides a better impedance match or power transfer, higher open circuit voltages, or higher short circuit currents. Recommended for cable current injection from 10 kHz to 1 MHz. Detailed information is provided on the **Solar Type 9335-2 Multiple Impedance Coupling Clamp**.

Solar Type 2925-1 Calibration Fixture

Calibration fixture provides a 50 Ω characteristic impedance based on the dimensions of the **Type 9335-2 Coupling Clamp**. The fixture maintains a low standing wave ratio from 10 kHz to 100 MHz in a 50 Ω circuit.

Solar Type 9142-1N Injection Probe

Recommended for cable current injection from 10 MHz to 100 MHz.

Solar Type 9125-1 Calibration Fixture

Calibration fixture for use with **Type 9142-1N Injection Probe**.

Solar Type 9123-1N Current Probe

Used to monitor injected pulses of the 10 MHz, 30 MHz and 100 MHz outputs.

**Solar Type 9410-1 (50 Ω / 50 Ω) and
Type 9454-1 (600 Ω / 50 Ω) High Voltage Attenuators**

Provide 40 dB attenuation from 10 kHz to 100 MHz. Protects oscilloscope from high voltage damage when verifying the output pulses of the **Model 9354-1** or **Model 9354-2**. The **Solar Type 9454-1** provides a high impedance to the generator for making measurements of open circuit output pulses.

Solar Type 6220-4 High Voltage Audio Isolation Transformer

When connected in series with the power lead under test, provides twice the open circuit voltage or twice the short circuit current for the 10 kHz and 100 kHz damped sinusoid waves and the 70 μ S double exponential pulse. Capable of handling up to 4000 V.

Solar Type 9616-1 Injection Clamp

Provides coupling for high voltage pulses produced by **Models 9354-1** and **Model 9354-2**.

Custom Quotes

To meet the needs of our clients, Solar Electronics Company engineers are in the lab every day. If you don't see a Solar product that suits your application, please send us your specifications so we can provide a solution.

800-952-5302
or
online quotes form

Terms

Orders / Production / SHIP TO

800-952-5302
818-755-1700
fax: 818-755-0078
sales@solar-emc.com
10866 Chandler Blvd.
North Hollywood, CA 91601

Map link

Service Support

service@solar-emc.com

Webmaster

Billing Inquiries / PAYMENTS

accounting@solar-emc.com
5238 Laurel Canyon Blvd.
North Hollywood, CA 91607

Do not ship to Laurel Canyon address.

Specifications subject to change without notice.

All Solar Electronics products are made in the USA.

©2017 Solar Electronics Company.
All rights reserved.