




## 3200L POWER AMPLIFIER

200 Watts  
RF Power  
For:

- Ultrasonic
- Testing
- Laboratory use
  
- 250 KHz to 150 MHz
- Instantaneous Bandwidth
- 200 W 1dB Compression
- Solid State
- Air Cooled

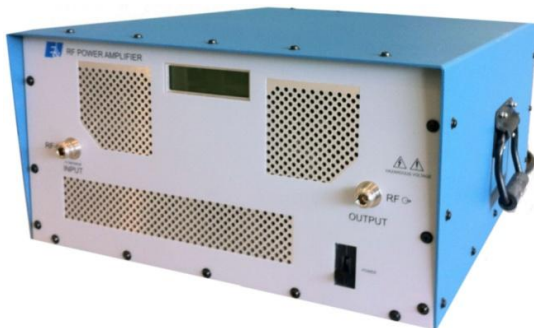

The 3200L Amplifier is a rugged source of RF power, useful for RFI/EMI, HF and VHF transmitters, plasma equipment, nuclear accelerators and general laboratory applications. The 3200L represents E&I's commitment to providing RF power amplifiers of the highest quality, durability and ruggedness.

### FLEXIBILITY:

The 3200L produces 200 Watts of Class A linear power output over the entire frequency range from 250 KHz to 150 MHz. It has very low harmonic distortion along with low IMD products. Operation over the band is achieved without the need for any band switching or indeed any adjustments. The power gain is rated at 53 dB with a typical gain flatness of +/- 1.5 dB

The 3200L is compatible with most signal generators, frequency synthesizers, sweep generators and other laboratory signal sources. It accurately reproduces all waveforms within its power and frequency ranges: AM, FM, SSB, pulsed and other complex modulation schemes.

### RUGGEDNESS:

The 3200L is built to withstand any VSWR load condition. The internal switched mode power supply is very conservatively rated, in order to facilitate operation over a large range of line conditions and temperatures. The forced air cooling provides for low internal temperatures, providing long term reliability. The RF power is delivered by rugged LDMoS FETs, de-rated to provide for excellent MTBF figures.

# 3200L POWER AMPLIFIER

## Class of Operation

Class A

## Frequency Range

250 KHz to 150 MHz

## Rated Power Output

200 Watts (P1dB)

## Saturated Power Output

250 KHz to 150 MHz > 250 W  
1 MHz to 100 MHz > 300 W

## Gain

53 dB (nominal)

## Gain Flatness

+/- 1.5 dB

## Input Power for rated Pout

1 mW

## Input Impedance / VSWR

50Ω / 1.5:1 maximum

## Output Impedance/ VSWR

50Ω / 2:1 maximum

## Harmonic Level

< -20 dBc @ 200W

## Ruggedness

∞:1 VSWR

## Protection

Input: Unit will withstand input signal of +13 dBm without damage (1.0 V rms) max. It can operate into an infinite load VSWR.

## Front Panel Meter

Indicates forward and reflected power

## Third Order Intercept Point

IP3 ~ 62 dBm

## AC Input

100 – 240 VAC 47-63 Hz  
25 A @ 120 V  
12.5 A @ 240 V

## Temperature Range

0 – 40 C

## Cooling

Forced air

## Weight

52 lbs (23.6 Kg)

## Dimensions

(H x W x D)  
9.25" x 17" x 21"  
235 x 431.8 x 533.4 mm



150 Research Blvd.  
Rochester, NY 14623  
Tel: (585) 214 0598  
Fax: (585) 214 0580  
[www.eandiltd.com](http://www.eandiltd.com)